

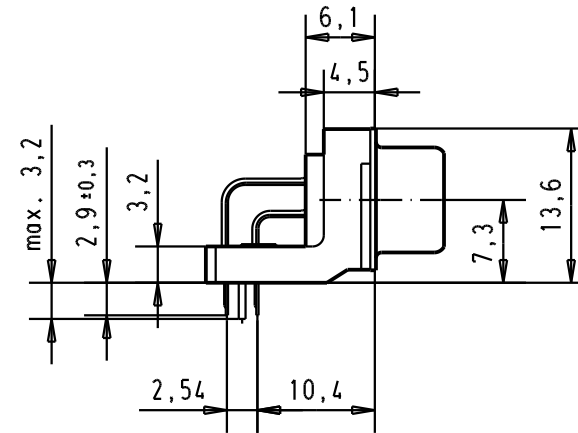
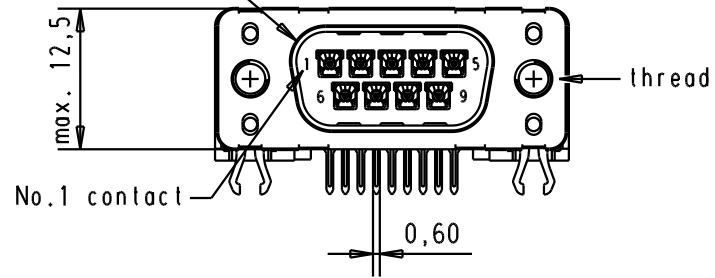


5 4 3 2 1




Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

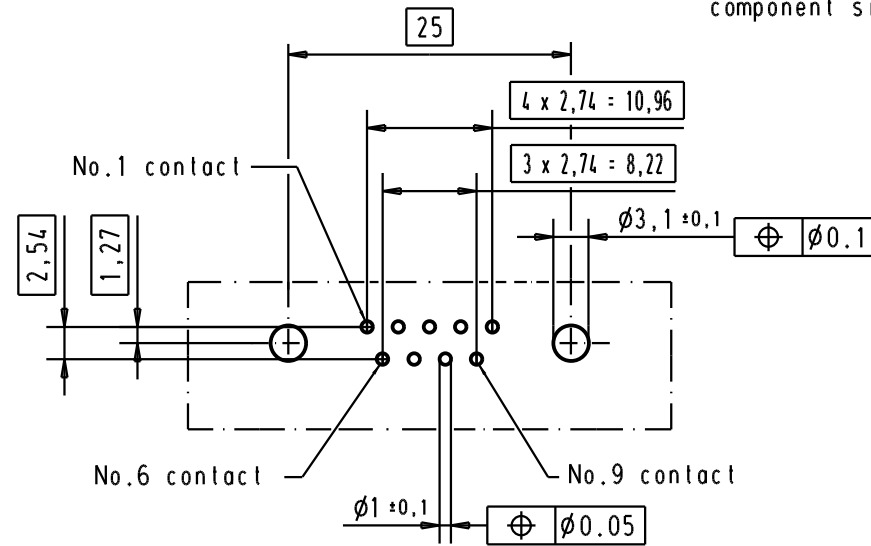

PCB layout hole component side

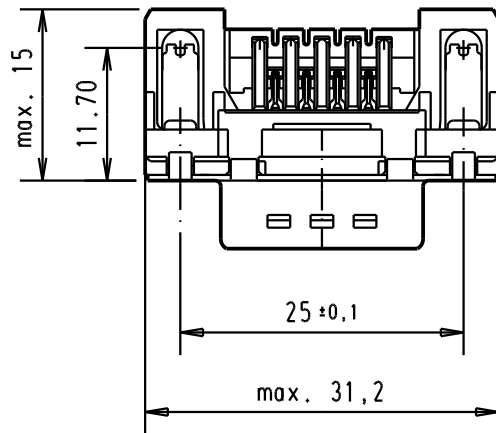

Connector retention and insertion forces on the PCB = 25 / 80 newtons

Part number	Nut thread	Performance level	Mod.	Dat.	Name	Dat.	Name	All Dim. in mm Orig. Size DIN A 4		Moßstab/ Scale
09 65 162 3811	M 3	1						 Detail. 20/nov/00 jfb	D-Sub, male, standard angle, 09 poles, with solder pin, nut and grounding board lock.	1.5:1
09 65 162 6811	M 3	2								
09 65 162 7811	M 3	3	31892	22/04/04	JH			 Insp. Stand.	TB 0965162x81x	Blatt/ Page 5
09 65 162 3812	4-40 UNC	1	31084	04/09/02	YT					
09 65 162 6812	4-40 UNC	2	29689	03/07/01	AA			HARTING EURL F-95972 Paris		Sub.
09 65 162 7812	4-40 UNC	3	27957	20/nov/00	jfb					