Fair-Rite Products Corp.

Your Signal Solution®

Flat Cable Snap- Its (0443164051)



Part Number: 0443164051

43 FLAT CABLE CORE ASSEMBLY

Explanation of Part Numbers: - Digits 1 & 2 = Product Class – Digits 3 & 4 = Material Grade


Flat Cable Snap- Its for use on multi- conductor flat cables to suppress common- mode conducted EMI from 1MHz to hundreds of MHz. These Flat Cable Snap- Its are available in two ferrite materials, 31 and 43. The polypropylene cases are meeting the RoHS restrictions of hazardous substances and have a flammability rating of UL 94 V-0.

The Expanded Cable and Suppressor Kit (Part number 0199000005) contains several Flat Cable Snap- It assemblies.

Catalog Drawing **3D Model**

Weight: 130 (g)

Dim	mm	mm tol	nominal inch	inch misc.	Cable Information			
А	80.8		3.18		Max	Max	Solid	Flat Cable
В	65.3		2.57		Diameter	Dimension	Equivalent	Cores
С	32.3		1.272		0	64.00 x 1.30		_
D	8.1		0.32		0		-	

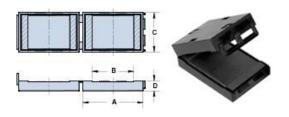

MaxMaxSolid EquivalentFlat Cable Cores0 064.00 x 1.30-				
0	Max	Max	Solid	Flat Cable
0 0 64.00 x 1.30 -	Diameter	Dimension	Equivalent	Cores
	0 0	64.00 x 1.30	_	-


Chart Legend + Test frequency		
Typical Impedance (Q)		

Typical Impedance	e (Ω)
10 MHz	54
25 MHz^+	94
100 MHz^+	217
250 MHz	353

Flat Cable Snap- It assemblies are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

Catalog Drawing

Centered, single turn impedance tests on the 31 and 43 material parts are performed on the E4991A/ HP4291B Impedance Analyzer. Cores are tested with the shortest practical wire length.

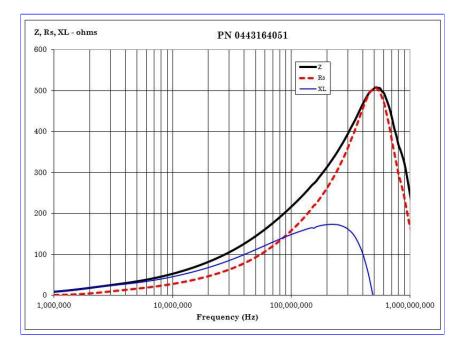

CSV Download

	Fair- Rite Products C	orp.	One Commercia	ıl Ro	w, Wallkill, New York 125	89-02	288
888-324-7748	• 845-895-2055		Fax: 845-895-2629		ferrites@fair- rite.com		www.fair- rite.com