## ACAG0301-24505500-T

#### FEATURES

- Dual band chip antenna
- Gain of 2.23dBi | 4.05dBi
- Made using LTCC (low temperature co-fired ceramic) technology
- Small form factor 3.2 x 1.6 x 1.2mm
- Omni-directional

#### APPLICATIONS


- IoT and wearable
- WiFi
- Bluetooth
- ISM applications

### **ELECTRICAL CHARACTERISTICS**

Item	Specification			
Frequency Range	2400 MHz~2500 MHz	5150 MHz~5850 MHz		
Frequency After Matching	2450 MHz	5500 MHz		
Bandwidth	100 MHz (typ.)	800 MHz (typ.)		
Return Loss	-7 dB (max.)	-7 dB (max.)		
Gain	2.23 dBi	4.05 dBi		
Impedance	50 Ω			
Azimuth	Omni-directional			
Operating Temperature range	$-40^{\circ}C \sim + 85^{\circ}C$			


#### **MECHANICAL DIMENSIONS (mm)**

#### **Antenna Dimension**

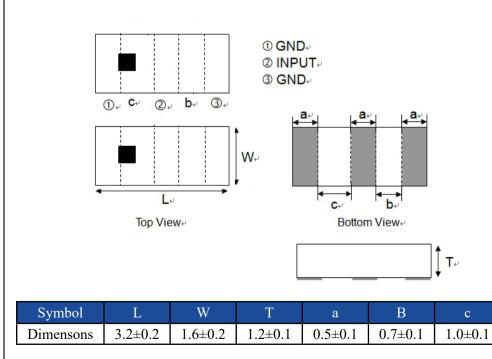

**ABRACON** 

#### **Layout Dimension**

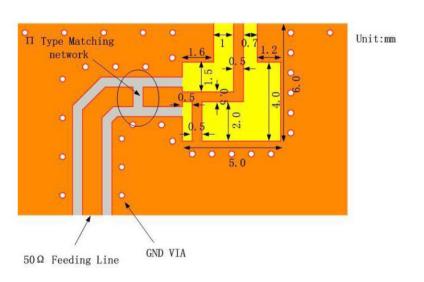

5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com REVISED: 12.21.2020

ABRACON IS ISO9001-2015 CERTIFIED

E

3.2 x 1.6 x 1.2mm

MSL = 3

**RoHS/RoHS II Compliant** 

(Pb)


## ACAG0301-24505500-T

3.2 x 1.6 x 1.2mm RoHS/RoHS II Compliant MSL = 3

## **EVALUATION BOARD AND MATCHING CIRCUITS**

Unit:mm G O.8pF C O.8pF

#### ANTENNA RESPONSE – SMITH CHART AND RETURN LOSS S11

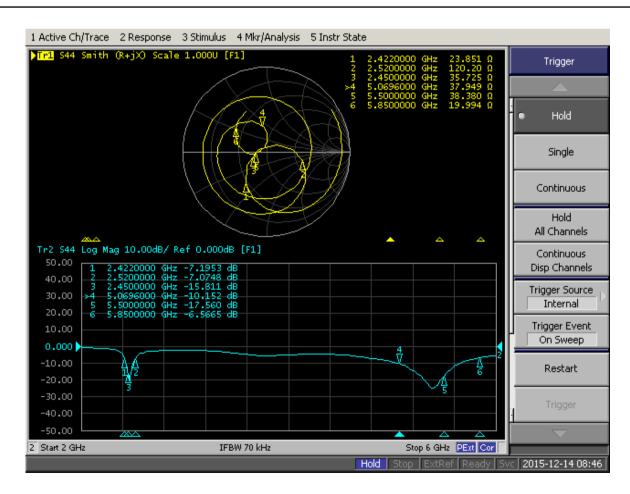




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com **REVISED: 12.21.2020** 

ABRACON IS ISO9001-2015 CERTIFIED

## ACAG0301-24505500-T


3.2 x 1.6 x 1.2mm RoHS/RoHS II Compliant MSL = 3

#### **RADIATION PATTERNS**

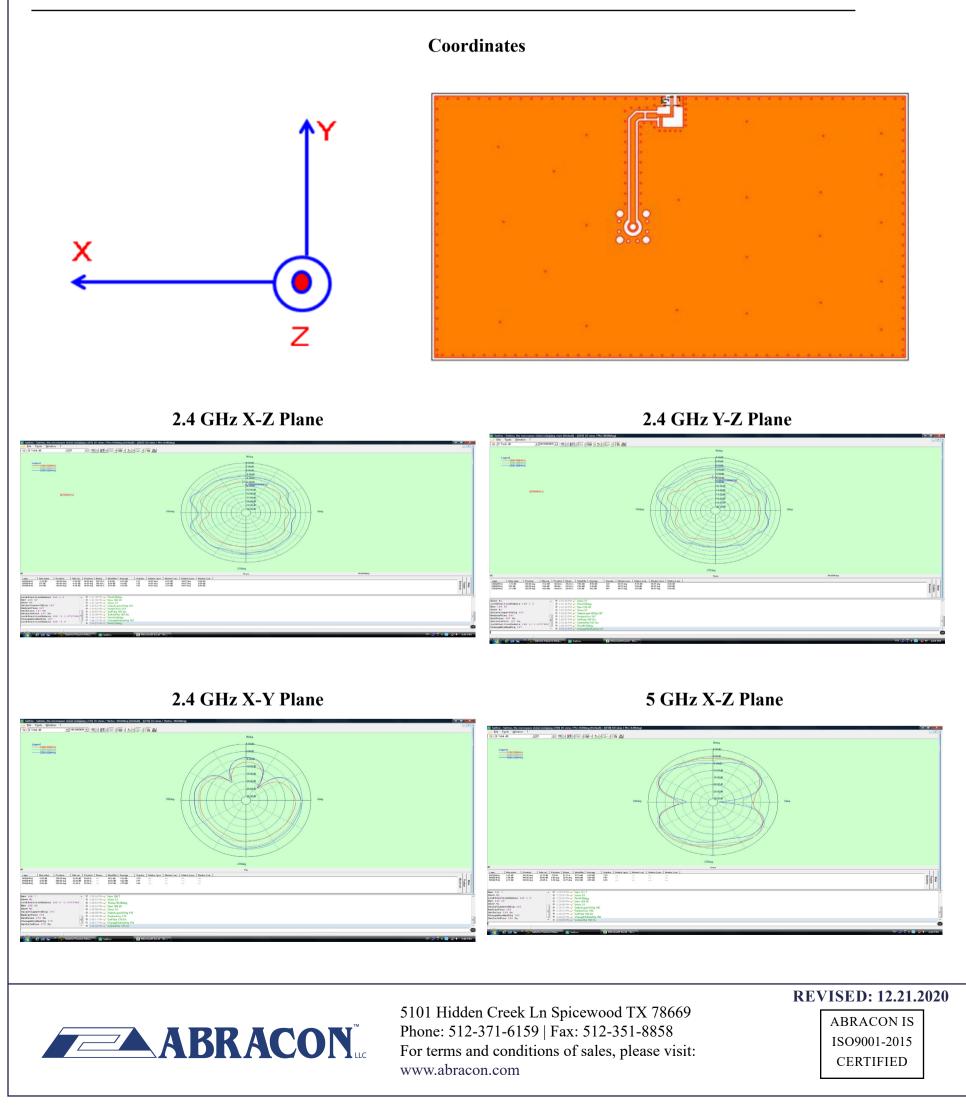

## ACAG0301-24505500-T

### **RADIATION PATTERNS**

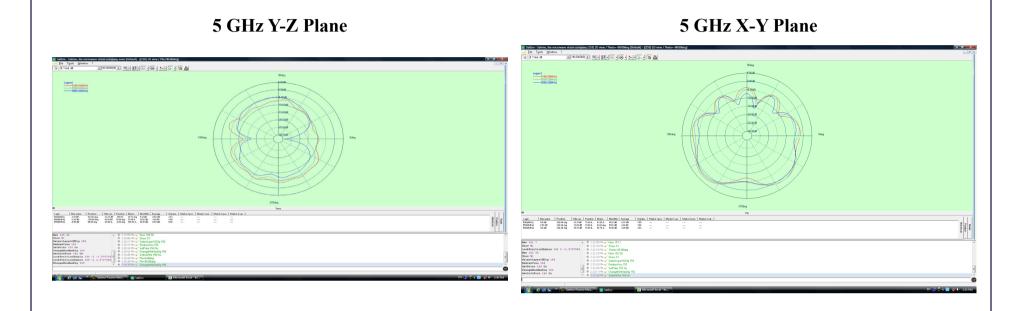

#### **3D RADIATION PATTERNS**

2450 MHz

Frequency (MHz)	2400	2450	2500
Avg. Gain (dBi)	-4.75	-1.61	-1.36
Peak Gain (dBi)	1.95	2.23	2.07
Efficiency (%)	42	66.5	50

Frequency (MHz)	5150	5500	5850
Avg. Gain (dBi)	-4.75	-1.61	-1.36
Peak Gain (dBi)	3.87	4.05	3.92
Efficiency (%)	70	76.8	64



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 12.21.2020** 

3.2 x 1.6 x 1.2mm

MSL = 3


(Pb) | RoHS/RoHS II Compliant

ABRACON IS ISO9001-2015 CERTIFIED

5500 MHz


## ACAG0301-24505500-T

### **REFLOW SOLDERING STANDARD CONDITION**

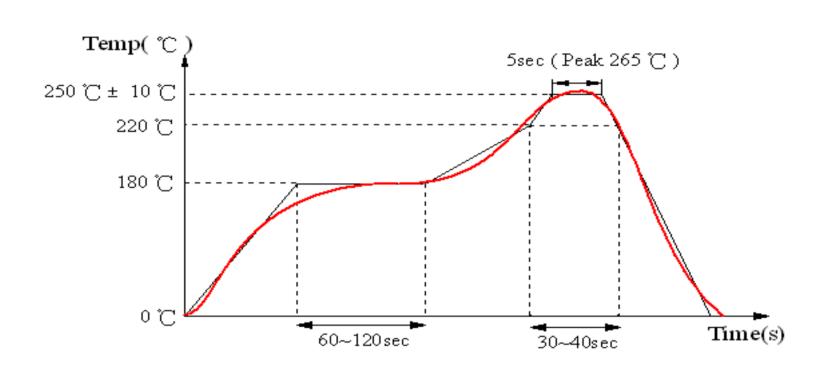

### PACKAGING

#### Reel (3000 pcs/Reel) Size of the carton: 330 x 210 x 210 mm

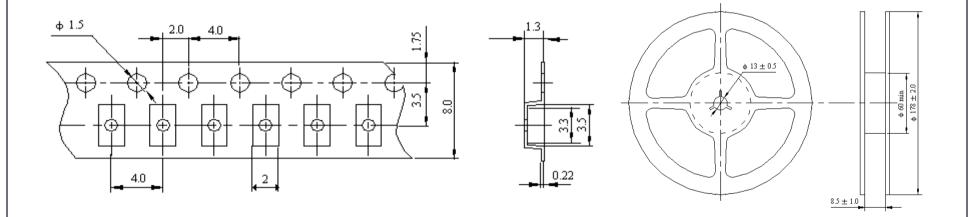

#### **Dimensions: mm**

Storage Temperature Range : <30 degree C, Humidity : <60%RH</li>
MSL - 3
Oxidizable, 12 months in a vacuum sealed bag.
Once opened, please repack the unused items within 168 hours by re-seal package treatment.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com **REVISED: 12.21.2020** 

ABRACON IS ISO9001-2015 CERTIFIED



3.2 x 1.6 x 1.2mm RoHS/RoHS II Compliant MSL = 3

## ACAG0301-24505500-T



### CAUTIONS

#### 1. Static voltage

Static voltage between signal & ground may cause deterioration & destruction of the component. Please avoid static voltage.

#### 2. Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.

#### 3. Soldering

Only leads of the component may be soldered. Please avoid soldering to any other part of the component, such as on the patterns as this will change the performance of the antenna.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com **REVISED: 12.21.2020** 

ABRACON IS ISO9001-2015 CERTIFIED

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON: ACAG0301-24505500-T