GPS/Galileo + GLONASS Ceramic Patch Antenna



APAKN1304-C2G-T

13.0 x 13.0 x 4.0mm RoHS/RoHS II Compliant MSL = 1

FEATURES

- Gain of 2.6 dBi
- 1575.42 MHz frequency
- RHCP Polarization
- 13.0 x 13.0 x 4.0mm form factor
- GPS/Galileo and Glonass

APPLICATIONS


- GPS/GNSS
- Galileo
- GLONASS
- IoT
- Remote technology/monitoring
- M2M

ELECTRICAL SPECIFICATIONS

Parameters	min	Тур.	Max.	Units	Note
Application Band: GPS / Galileo		1575.42±1.023		MHz	(On a 70*70mm Ground Plane)
Return Loss: GPS / Galileo			-10	dB	
Gain (Peak): GPS / Galileo		2.6		dBi	
Application Band: GLONASS		1602 ± 5.0		MHz	(On a 70*70mm Ground Plane)
Return Loss: GLONASS			-10	dB	
Gain (Peak): GLONASS		2.4		dBi	
Polarization Model		RHCP			
Impedance		50		Ω	
Frequency Temperature Coefficient			20	ppm/°C	

^(*) Application environment, including size of the ground plane, proximity to adjacent components, etc., will affect stated performance. Fine tuning might be required when installed on end-customer's PCB. Abracon offers Antenna Optimization Service, please contact Abracon.

RETURN LOSS CHARACTERISTIC

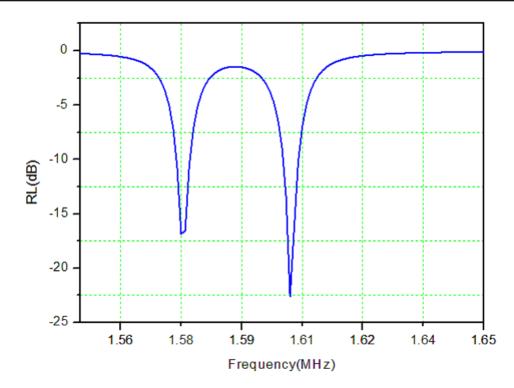

Return Loss characteristic shows a dual band response for GPS/Galileo & GLONASS R.H.).



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com **REVISED: 02.13.2020**

ABRACON IS ISO9001-2015 CERTIFIED


GPS/Galileo + GLONASS Ceramic Patch Antenna




APAKN1304-C2G-T

13.0 x 13.0 x 4.0mm RoHS/RoHS II Compliant MSL = 1

RADIATION PATTERN (X-Y PLANE)

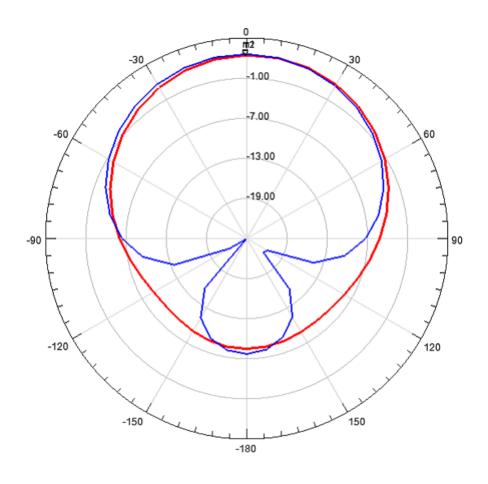

LANDING PATTERN

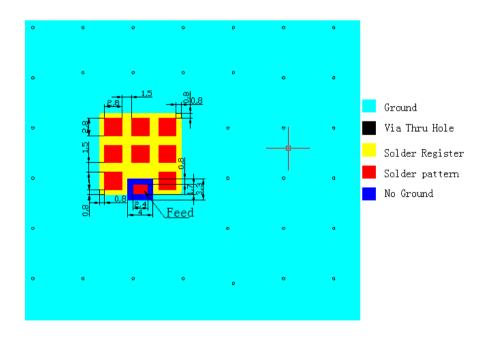



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com **REVISED: 02.13.2020**

ABRACON IS ISO9001-2015 CERTIFIED


GPS/Galileo + GLONASS Ceramic Patch Antenna



APAKN1304-C2G-T


13.0 x 13.0 x 4.0mm RoHS/RoHS II Compliant MSL = 1

OUTLINE DIMENSIONS

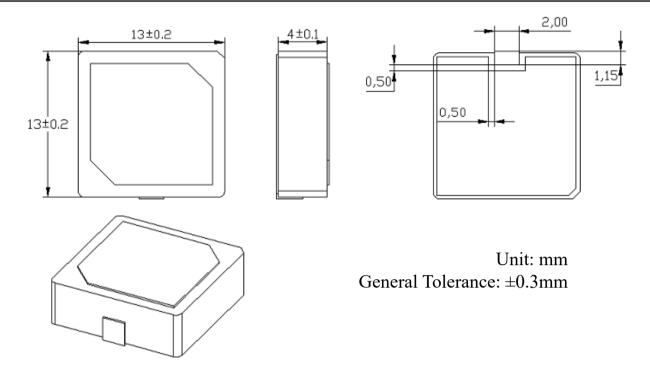

RECOMMENDED REFLOW SOLDERING PROFILE

Solder Paste: Sn/Ag/Cu: 96.5/3.0/0.5 Recommended reflow condition:

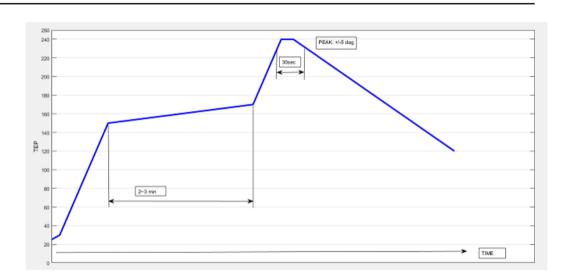

PACKAGING

Package is made of corrugated paper with thickness of 0.8cm. Carton has 8 inner boxes; each inner box has 1 vacuum bag.

Quantity:

Per package base : 50 elements

Per vacuum bag : 5 package bases / trays

Per inner box : 1 vacuum bag
Per package : 8 inner boxes

Total No of pieces/ package : 2000 Gross Weight : 9 Kg

Carton Dimensions : 52*29*16cm



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com **REVISED: 02.13.2020**

ABRACON IS ISO9001-2015 CERTIFIED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

APAKN1304-C2G-T