


Ultra-Fast Switching

High efficiency Glass Passivated Rectifier

multicomp PRO



Features:

- Fred chip construction
- Soft recovery characteristics
- Low forward voltage drop
- Low reverse leakage current
- High surge current capability
- Plastic material has UL flammability classification 94V-0

Mechanical Data:

Case	: ITO-220AB, molded plastic
Lead	: Pure tin plated, lead solderable per MIL-STD-750, method 2026
Polarity	: As marking
Weight	: 1.9 grams (approx)
Mounting Position	: Any
Reverse Voltage	: 200 to 600 Volts
Forward Current	: 16 Amperes

Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristics	Symbol	MURF1620CT	MURF1660CT	Unit
Max. Recurrent Peak Reverse Voltage	V_{RRM}	200	600	V
Max. RMS Voltage	V_{RMS}	140	420	
Max. DC Blocking Voltage	V_{DC}	200	600	
Max. Average Forward Rectified Current	$I_{F(AV)}$	16		A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I_{FSM}	150		
Max. Forward Voltage at 8A per leg	V_F	0.95	1.5	V
Max. DC Reverse Current at Rated DC Blocking Voltage at	I_R	10 250		μA
Typical Thermal Resistance	$R_{\theta JC}$	3	2	°C/W
Maximum Reverse Recovery Time ($I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$)	T_{RR}	35	50	Ns
Operating Temperature Range	T_J	-55 to +150		°C
Storage Temperature Range	T_{STG}			

Notes:

1. Mounted on 14mm × 14mm pad areas, 1oz.FR4 P.C.B.
2. Free air, mounted on recommended copper pad area.
3. Pulse test: 300µs pulse width, 1% duty cycle
4. Pulse test: Pulse width ≤ 40ms
5. The typical data above is for reference only

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

Ultra-Fast Switching

High efficiency Glass Passivated Rectifier



Ratings and Characteristic Curves

FIG. 1 - FORWARD CURRENT DERATING CURVE

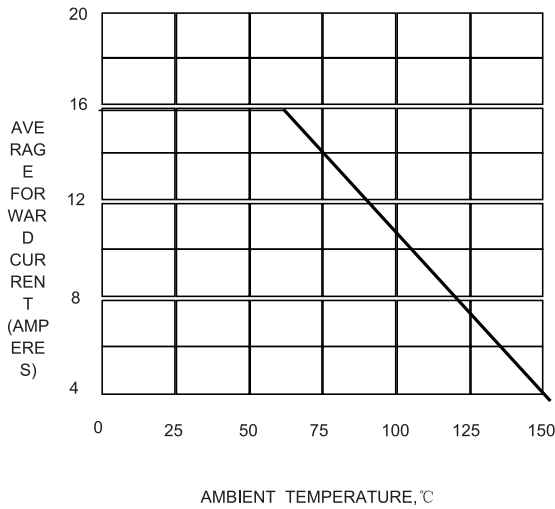


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

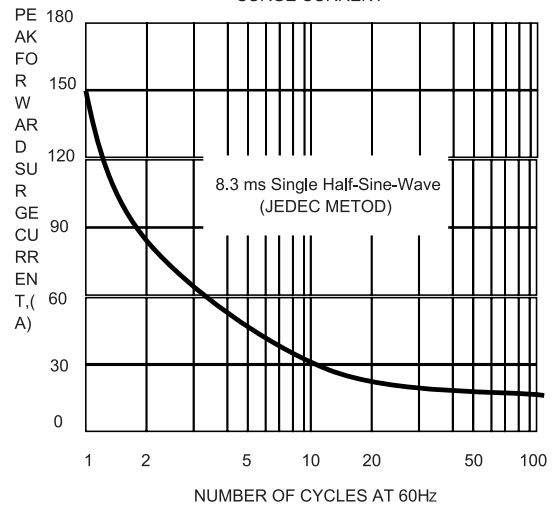


FIG.3-TYPICAL FORWARD CHARACTERISTICS


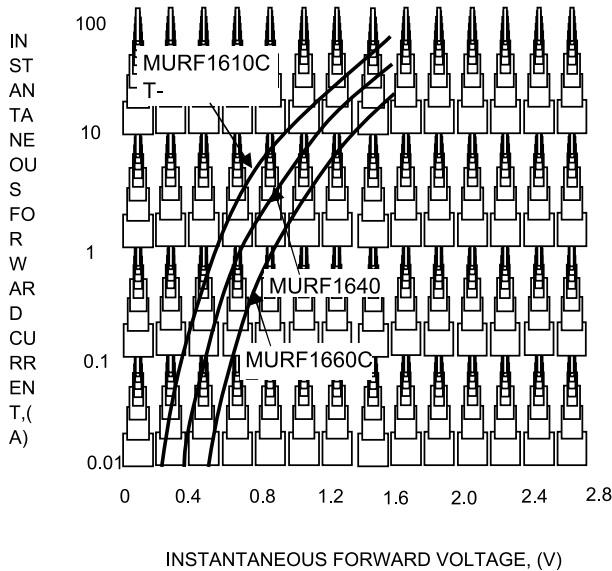


FIG.4-TYPICAL REVER CHARACTERISTICS

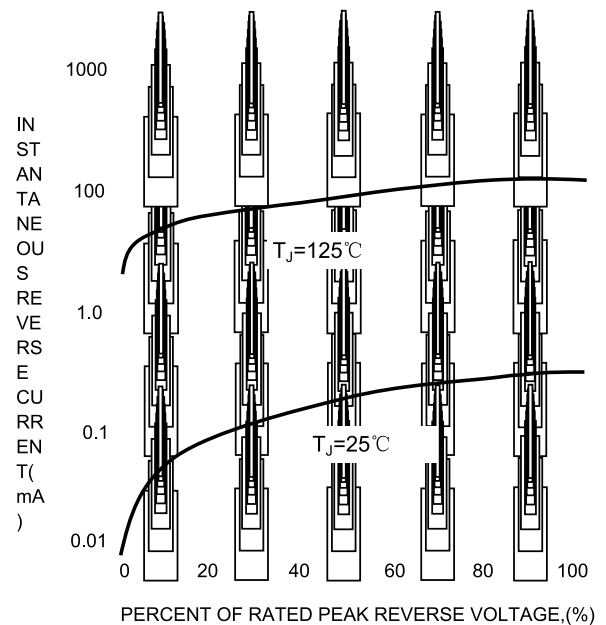


Ultra-Fast Switching

High efficiency Glass Passivated Rectifier

multicomp PRO

Dimensions:

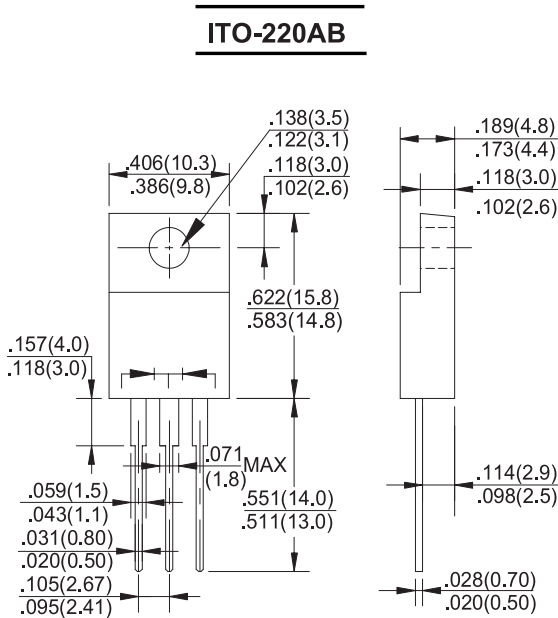

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Ultra-Fast Switching, High Efficiency Glass Passivated Rectifiers	MURF1620CT
	MURF1660CT

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicomp PRO