

REVISIONS				
REV.	DESCRIPTION	DATE	APPROVED	
Α	ECO #6590	03/19/07	A.D.M.	



PROPRIETARY INFORMATION
NOT TO BE RELEASED
WITHOUT WRITTEN PERMISSION
FROM AN AUTHORIZED
REPRESENTATIVE OF APPLIED ENGINEERING PRODUCTS

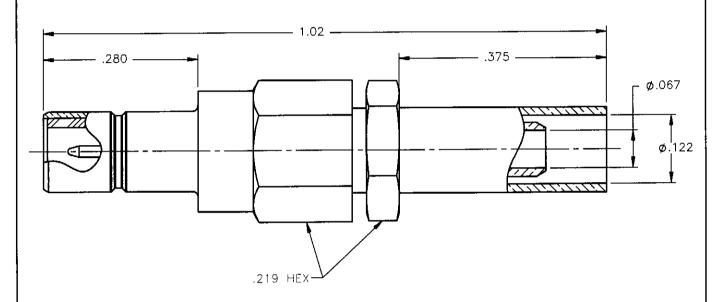

## NOTES:

## MATERIALS:

- INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
   CRIMP SLEEVE = SEAMLESS LOWLEAD BRASS TUBE, ALLOY 330, SOFT ANNEAL TEMPER, .025/.060 GRAIN SIZE OR SEAMLESS COPPER TUBE PER ASTM B75, TYPE C12000, TEMPER: LIGHT ANNEAL 050 EXCEPT YIELD STRENGTH.
   ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

## FINISHES:

- CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
   ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: DATE A.D.M. 03/19/07 CHKD: DATE	APPLIED ENGINEERING PRODUCTS  104 John W. Murphy Dr. New Haven, CT 06513
DECIMAL ANGLE	D.N. 03/19/07  APVD: DATE  J.M. 03/19/07	SMB STRAIGHT MALE JACK CRIMP TYPE
REFERENCE:  ORIGINATED: E.W. DATE: 05/03/83	MATERIALS & FINISHES: SEE NOTES	SIZE FSCM NO. DWG NO. A 19505 2001—1571—003 A  SCALE 6:1 THIRD ANGLE THIRD ANG

ഗ

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radiall:

2001-1571-003