

Laser Distance Meter

User Manual



Please read this manual before switching the unit on.
Important safety information inside.

Contents	Page
1.Safety Instruction.....	4
1-1.Permitted Use.....	4
1-2.Prohibited Use.....	4
1-3.Laser Classification.....	4
2.Start-Up.....	5
2-1.Inserting/Replacing Batteries(See “Figure A”).....	5
2-2.Keypad(See “Figure B”).....	5
2-3.LCD Display(See “Figure C”).....	5
3.Initial Operation and Setting.....	6
3-1.Switching On and Off.....	6
3-2.Clear Button.....	6
3-3.Reference Level Setting(See “Figure D”).....	6
3-4.Display Illumination.....	7
3-5.Distance Unit Setting For Instrument.....	7
4.Measuring.....	8
4-1.Single Distance Measurement.....	8
4-2.Max and Min Measurement(See “Figure E”).....	8
5.Functions.....	9
5-1.Addition/Subtraction.....	9
5-2.Area Measurement.....	9
5-3.Volume Measurement.....	9
5-4.Indirect Measurement.....	10
5-5.Indirect Measurement-Determining a Distance Using 3 Measurements(See “Figure H”).....	10
5-6.Historical Storage.....	11
6.Technical Data.....	11
7.Troubleshooting-Causes and Corrective Measures.....	12
8.Measuring Sonditions.....	13
8-1.Measuring Range.....	13
8-2.Target Surfaces.....	13
8-3.Care.....	13
9.Labelling.....	14

1.Safety Instruction

1-1.Permitted Use

- Measuring distances
- Computing functions, e. g. areas and volumes

1-2.Prohibited Use

- Using the instrument without instruction
- Using outside the stated limits
- Deactivation of safety systems and removal of explanatory and hazard labels
- Opening of the equipment by using tools(screwdrivers, etc.), as far as not specifically permitted for certain cases
- Carrying out modification or conversion of the product
- Use of accessories from other manufacturers without the express approval of by us.
- Deliberate or irresponsible behavior on scaffolding, when using ladders, when measuring near machines which are running, or near parts of machines or installations which are unprotected
- Aiming directly into the sun
- Inadequate safeguards at the surveying site(e.g.When measuring on roads, construction sites, etc.)

1-3.Laser Classification

This device produced a visible laser beam which emerges from the front of the instrument.

Laser Class 2 products:

Do not stare into the laser beam or direct it towards other people unnecessarily. Eye's protection is normally afforded by aversion responses including the blink reflex.



WARNING:

Looking directly into the beam with optical aids(e.g. Binoculars, telescopes)can be hazardous.

Precautions:

Do not look directly into the beam with optical aids.



CAUTION:


Looking into the laser beam may be hazardous to the eyes.

Precautions:

Do not look into the laser beam. Make sure the laser is aimed above or below eye level.

2.Start-Up

2-1.Inserting/Replacing Batteries(See “Figure A”)

- 1-Remove battery compartment lid.
- 2-Insert batteries, observing correct polarity.
- 3-Close the battery compartment again.
 - Replace the batteries when the symbol “” flashes permanently in the display.
 - Use alkaline batteries only.
 - Remove the batteries before any long period of non-use to avoid the danger of corrosion




Figure A

2-2.Keypad(See “Figure B”)

- 1-ON/MEAS button
- 2-Area/Volume button
- 3-Indirect measurement button
- 4-Single/Continuous Distance measurement button
- 5-Plus(+)button
- 6-Minus(-)button
- 7-Storage button
- 8-Reference button
- 9-Illuminating/UNITS button
- 10-Clear/Off button








Figure B

2-3.LCD Display(See “Figure C”)

- 1-Laser active
- 2-Reference level(front)
- 3-Reference level(rear)
- 4-Variable measuring functions
 -  Area measurement
 -  Volume measurement
 -  Indirect measurement
 -  Indirect(second)measurement
- 5-Single distance measurement
- 6-Battery status
- 7-Historical memory
- 8-Instrument error warning
- 9-Continuous measurement & Max and Min measurement
- 10-First value display line
- 11-Second value display line
- 12-Summary line for last measure or calculation result




Figure C

3.Initial Operation and Setting

3-1.Switching On and Off



Switches on the instrument and laser.



Press this button longer to switch off the instrument.


The instrument switches off automatically after three minutes of inactivity.

3-2.Clear Button



The last action is cancelled or the data display is cleared. If in the mode of History storage, press Storage button and Clear button simultaneously will clear all storage data in the memory.

3-3.Reference Level Setting(See “Figure D”)

The default reference setting is from the rear of the instrument. Press this button  to take the selection from the front edge. A special beep sounds whenever the reference setting is changed. After a re-startup the reference returns automatically to the default setting(rear reference).

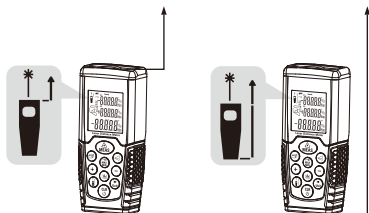




Figure D

3-4. Display Illumination

 Click illumination/UNITS button of the display can be switched on or off, user can trigger the function when he/she is in darkness situation. The value is clear visible on the LCD

3-5. Distance Unit Setting For Instrument

 Click the button longer to change the next type of unit, m, ft. in, ft+in then continue to click the button for the next unit selection

	Distance	Area	Volume
1	0.000m	0.000m ²	0.000m ³
2	0.0in	0.000ft ²	0.000ft ³
3	01/16in	0.000ft ²	0.000ft ³
4	0.000ft	0.000ft ²	0.000ft ³
5	0'00" 1/16	0.000ft ²	0.000ft ³

4.Measuring

4-1.Single Distance Measurement



Press to trigger the distance measurement. The measured value is displayed immediately.


Press this key longer to trigger continuous measurement function.



You can press this key to stop the continuous measurement and longer press will switch off the device.

4-2.Max and Min Measurement(See “Figure E”)

This function is used for the transferring of measurements In continuous measurement mode, the measuring tool can be moved to the target, whereby the measured value is updated approx. every 0.5 seconds. The corresponding minimum and maximum values are displayed dynamically in the first and second line.

As an example, the user can move from a wall to the required distance, while the actual distance can be read continuously. For continuous measurement, push button  until the indicator for continuous measurement appears in the display. And press MEAS or Clear button again to stop the function. The function is terminated automatically after continuous 500 times measurement.









Figure E



5.Functions

5-1.Addition/Subtraction

Distance measuring.

-  The next measurement is added to the previous one.
-  The next measurement is subtracted from the previous one.
-  The last step is cancelled.
-  Return to the single distance measurement

5-2.Area Measurement

Press the Area/Volume button once. The  symbol appears in the display.

Press  button to take the first length measurement(e.g.Length).

Press  again to take the second length measurement(e.g.Width).

The result of the area measurement is displayed in the third line, the individually measured values are displayed in lines 1 and 2.

5-3.Volume Measurement

For volume measurements, push Area/Volume button twice until the indicator for volume measurement appears in the display.

 Press to takes first distance measurement (e.g.Length)

 Press to takes second distance measurement(e.g.Width)

The result of the area measurement from the values already measured is displayed in the summary line.



 Press to takes the third distance measurement(e.g.Height).
The value is displayed in the second line.


The result of the area measurement is displayed in the third line, the two previously measured values in lines 1 and 2.

5-4. Indirect Measurement


Indirect measurement-determining a distance using 2 auxiliary measurements. (See "Figure G").

e.g. when measuring heights that require the measurement of two or three measurements as following step:

Press this button  once, the display  shows. The distance to be measured flashes in the symbol.

 Aim at the upper point(1) and trigger the measurement.

After the first measurement the value is adopted. Keep the instrument as horizontal as possible.

 Press to measurement the distance result of the horizontal point (2).

The result of the function is displayed in the summary line.

Note: The horizontal level will affect the measurement result.








Figure G

5-5. Indirect Measurement-Determining a Distance Using 3 Measurements(See "Figure H")

Press this button  twice; the display shows the following symbol, the display  shows. The distance to be measured flashes in the symbol.

 Aim at the lower point(1) and trigger the measurement. After the first measurement the value is adopted. Keep the instrument as horizontal as possible.

 Press to measurement the distance result of the horizontal point(2).

 Press to measurement the distance result of the upper point(3).

The result of the function is displayed in the summary line.

Note: The horizontal level will affect the measurement result.







Figure H

5-6. Historical Storage

 the previous 20 records (measurements or calculated results) are shown in the reverse order. Use the  or  buttons to navigate through these records.

Press and hold Storage button then long press Clear button will clear all records in historical storage mode.

6. Technical Data

Technical Specifications	Model
Range	0.05 to 60m* (0.16ft to 197ft*)
Measuring accuracy up to 10m (2, standard deviation)	Typically: $\pm 1.5\text{mm}^{**}$ ($\pm 0.06\text{in}^{**}$)
Measuring units	m, in, ft
Laser Class	Class II
Laser Type	635nm, <1mW
Area, Volume Calculations	✓
Indirect measurement using Pythagoras	✓
Addition/Subtraction	✓
Continuous Measurement	✓
Min/Max Distance Tracking	✓
Display illumination and multi-line display.	✓
Beep indication	✓
Dust Protect/Splash proof	IP54
History measurement records	20
Keyboard Type	Super Soft-Touch (Long life)
Operating Temperature	-10°C to 50°C (142°F to 122°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Operating Humidity	<95%RH (no condensation)
Storage Humidity	30%~50%RH
Battery Life	up to 4,000 measurements
Batteries	Type AAA 2 x 1.5V
Auto. laser switch-off	after 0.5min
Auto instrument switch-off	after 3min
Dimension	110 x 46 x 28mm
Weight	100g

* Use a target plate to increase the measurement range during daylight or if the target has poor reflection properties!

** in favourable conditions(good target surface properties, room temperature)up to 10m(33ft). In unfavourable conditions, such as intense sunshine, poorly reflecting target surface or high temperature variations,the deviation over distances above 10m(33ft)can increase by $\pm 0.15\text{mm/m}(\pm 0.0018\text{in/ft})$.

7.Troubleshooting-Causes and Corrective Measures

Code	Cause	Corrective measure
204	Calculation error	Repeat procedure
208	Received signal too weak, measurement time too long. Distance >50m	Use target plate
209	Received signal too strong	Target too reflective(use target plate)
252	Temperature too high	Cool down instrument
253	Temperature too low	Warm up instrument
255	Hardware error	Switch ON/OFF the device several times, If the symbol still appears, please contact your dealer for assistance.

8.Measuring Sonditions

8-1.Measuring Range

The range is limited to Technical Specifications.

At night or dusk and if the target is in shadow the measuring range without target plate is increased. Use a target plate to increase the measurement range during daylight or if the target has poor reflection properties.

8-2.Target Surfaces

Measuring errors can occur when measuring toward colorless liquids (e.g.water)or dust free glass, Styrofoam or similar semi-permeable surfaces. Aiming at high gloss surfaces may deflect the laser beam and lead to measurement errors.


Against non-reflective and dark surfaces the measuring time may increase.

8-3.Care

Do not immerse the instrument in water. Wipe off dirt with a damp, soft cloth. Do not use aggressive cleaning agents or solutions.

Handle the instrument as you would a telescope or camera.

9. Labelling





CE



Rev.180703