

## RXJ Series

### Features


- 105°C, 2,000 ~ 5,000 hours assured
- Low ESR, suitable for switching power supplies
- Smaller size with large permissible ripple current
- RoHS compliance



### Specifications

Items	Performance																																											
Category	6.3 ~ 63V	100V																																										
Temperature Range	-55°C ~ +105°C	-40°C ~ +105°C																																										
Capacitance Tolerance	±20% (at 120 Hz, 20°C)																																											
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																																											
Tanδ (at 120 Hz, 20°C)	<table border="1"> <tr> <th>Rated Voltage</th> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <th>Tanδ (max)</th> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </table> <p>When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase.</p>		Rated Voltage	6.3	10	16	25	35	50	63	100	Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																								
Rated Voltage	6.3	10	16	25	35	50	63	100																																				
Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																																				
Low Temperature Characteristics (at 120 Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <th>Rated Voltage</th> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <th>Impedance Ratio Z(-55°C)/Z(+20°C)</th> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>		Rated Voltage	6.3	10	16	25	35	50	63	100	Impedance Ratio Z(-55°C)/Z(+20°C)	4	4	3	3	3	3	3	3																								
Rated Voltage	6.3	10	16	25	35	50	63	100																																				
Impedance Ratio Z(-55°C)/Z(+20°C)	4	4	3	3	3	3	3	3																																				
Endurance	<table border="1"> <tr> <th>Test Time</th> <td>2,000 Hrs for φ D ≤ 8 mm; 5,000 Hrs for φ D ≥ 10 mm</td> </tr> <tr> <th>Capacitance Change</th> <td>Within ±20% of initial value</td> </tr> <tr> <th>Tanδ</th> <td>Less than 200% of specified value</td> </tr> <tr> <th>Leakage Current</th> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 2,000/5,000 hours at 105°C.</p>		Test Time	2,000 Hrs for φ D ≤ 8 mm; 5,000 Hrs for φ D ≥ 10 mm	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Within specified value																																		
Test Time	2,000 Hrs for φ D ≤ 8 mm; 5,000 Hrs for φ D ≥ 10 mm																																											
Capacitance Change	Within ±20% of initial value																																											
Tanδ	Less than 200% of specified value																																											
Leakage Current	Within specified value																																											
Shelf Life Test	<table border="1"> <tr> <th>Test Time</th> <td>1,000 Hrs</td> </tr> <tr> <th>Capacitance Change</th> <td>Within ±20% of initial value</td> </tr> <tr> <th>Tanδ</th> <td>Less than 200% of specified value</td> </tr> <tr> <th>Leakage Current</th> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.</p>		Test Time	1,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Within specified value																																		
Test Time	1,000 Hrs																																											
Capacitance Change	Within ±20% of initial value																																											
Tanδ	Less than 200% of specified value																																											
Leakage Current	Within specified value																																											
Ripple Current and Frequency Multipliers	<table border="1"> <tr> <th rowspan="2">Cap.(μF)</th> <th colspan="7">Freq.(Hz)</th> </tr> <tr> <th>60 (50)</th> <th>120</th> <th>500</th> <th>1k</th> <th>10k</th> <th>100k</th> </tr> <tr> <td>≤ 33</td> <td>0.40</td> <td>0.55</td> <td>0.65</td> <td>0.80</td> <td>0.90</td> <td>1.00</td> </tr> <tr> <td>39 ~ 330</td> <td>0.60</td> <td>0.70</td> <td>0.80</td> <td>0.90</td> <td>0.95</td> <td>1.00</td> </tr> <tr> <td>390 ~ 1,000</td> <td>0.65</td> <td>0.80</td> <td>0.85</td> <td>0.98</td> <td>1.00</td> <td>1.00</td> </tr> <tr> <td>1,200 ≤</td> <td>0.80</td> <td>0.90</td> <td>0.95</td> <td>0.98</td> <td>1.00</td> <td>1.00</td> </tr> </table>		Cap.(μF)	Freq.(Hz)							60 (50)	120	500	1k	10k	100k	≤ 33	0.40	0.55	0.65	0.80	0.90	1.00	39 ~ 330	0.60	0.70	0.80	0.90	0.95	1.00	390 ~ 1,000	0.65	0.80	0.85	0.98	1.00	1.00	1,200 ≤	0.80	0.90	0.95	0.98	1.00	1.00
Cap.(μF)	Freq.(Hz)																																											
	60 (50)	120	500	1k	10k	100k																																						
≤ 33	0.40	0.55	0.65	0.80	0.90	1.00																																						
39 ~ 330	0.60	0.70	0.80	0.90	0.95	1.00																																						
390 ~ 1,000	0.65	0.80	0.85	0.98	1.00	1.00																																						
1,200 ≤	0.80	0.90	0.95	0.98	1.00	1.00																																						

### Diagram of Dimensions

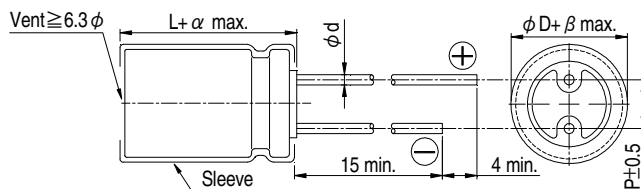

### Lead Spacing and Diameter

	Unit: mm						
φ D	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φ d	0.5		0.6			0.8	
α	L < 20: 1.5, L ≥ 20: 2.0						
β	0.5						



Dimension:  $\phi D \times L$ (mm)  
 Impedance:  $\Omega$ / at 100k Hz  
 Ripple Current: mA/rms at 105°C

### Dimension and Permissible Ripple Current

Rated Volt. (Vdc) Contents Cap. ( $\mu$ F)	6.3V (0J)					10V (1A)					16V (1C)				
	$\phi D \times L$	Impedance ( $\Omega$ , max./100k Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance ( $\Omega$ , max./100k Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance ( $\Omega$ , max./100k Hz)		Ripple Current (mA/rms, 105°C)	
		20°C	-10°C	120 Hz	100k Hz		20°C	-10°C	120 Hz	100k Hz		20°C	-10°C	120 Hz	100k Hz
33											5×11	1.30	3.90	108	154
39											5×11	1.30	3.90	108	154
47						5×11	2.10	5.50	78	111	6.3×11	0.60	1.80	182	260
56						5×11	1.90	4.80	85	121	6.3×11	0.60	1.80	182	260
68						5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	182	260
100	5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260
220	6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	280	400	8×11.5	0.33	0.99	320	400
330	8×11.5	0.33	0.88	280	400	8×11.5	0.33	0.99	280	400	10×12.5	0.25	0.75	360	510
390	8×11.5	0.33	0.88	320	400	10×12.5	0.27	0.75	410	510	10×16	0.19	0.57	510	635
470	10×12.5	0.25	0.75	410	510	10×12.5	0.25	0.75	410	510	10×16	0.19	0.57	510	635
560	10×12.5	0.25	0.75	410	510	10×16	0.19	0.57	510	635	10×20	0.14	0.42	775	860
680	10×16	0.19	0.57	510	635	10×16	0.19	0.57	510	635	10×20	0.14	0.42	775	860
1,000	10×20	0.14	0.42	690	860	10×20	0.14	0.37	690	860	12.5×20	0.085	0.26	1,000	1,250
1,200	10×20	0.14	0.42	775	860	10×25	0.12	0.30	930	1,030	12.5×20	0.085	0.26	1,125	1,250
2,200	12.5×20	0.085	0.26	1,125	1,250	12.5×25	0.070	0.21	1,200	1,355	12.5×25	0.070	0.21	1,200	1,355
3,300	12.5×25	0.070	0.21	1,200	1,355	12.5×25	0.070	0.21	1,200	1,355	16×31.5	0.048	0.14	1,830	2,030
4,700	16×25	0.060	0.18	1,595	1,770	16×31.5	0.048	0.14	1,830	2,030	16×35.5	0.044	0.13	2,065	2,295

Rated Volt. (Vdc) Contents Cap. ( $\mu$ F)	25V (1E)					35V (1V)					50V (1H)				
	$\phi D \times L$	Impedance ( $\Omega$ , max./100k Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance ( $\Omega$ , max./100k Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance ( $\Omega$ , max./100k Hz)		Ripple Current (mA/rms, 105°C)	
		20°C	-10°C	120 Hz	100KHz		20°C	-10°C	120 Hz	100KHz		20°C	-10°C	120 Hz	100KHz
2.2											5×11	4.0	12.0	48	88
3.3											5×11	3.50	11.0	52	94
4.7											5×11	3.00	9.00	55	100
6.8											5×11	3.00	9.00	55	100
10											5×11	2.00	6.00	68	124
22						5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	143	260
33	5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	143	260
39	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260
47	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	320	400
56	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	320	400
68	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	320	400
100	8×11.5	0.33	0.99	320	400	8×11.5	0.33	0.99	320	400	10×16	0.19	0.57	445	635
220	10×12.5	0.25	0.75	360	510	10×16	0.19	0.57	445	635	10×25	0.12	0.30	825	1,030
330	10×16	0.19	0.57	445	635	10×20	0.12	0.42	600	860	12.5×20	0.085	0.26	875	1,250
390	10×20	0.14	0.42	775	965	10×25	0.12	0.30	930	1,030	12.5×25	0.070	0.21	1,085	1,355
470	10×20	0.14	0.42	775	965	12.5×20	0.085	0.26	1,000	1,250	12.5×25	0.070	0.21	1,085	1,355
560	10×25	0.12	0.30	930	1,030	12.5×20	0.085	0.26	1,000	1,250	12.5×25	0.070	0.21	1,085	1,355
680	12.5×20	0.085	0.26	1,000	1,250	12.5×25	0.070	0.21	1,085	1,355	16×25	0.060	0.18	1,415	1,770
1,000	12.5×25	0.070	0.23	1,080	1,355	12.5×25	0.070	0.21	1,085	1,355	16×25	0.060	0.18	1,595	1,770
1,200	12.5×25	0.070	0.21	1,200	1,355	12.5×25	0.070	0.21	1,200	1,355	16×31.5	0.048	0.14	1,830	2,030
2,200	16×25	0.060	0.18	1,595	1,770	16×35.5	0.044	0.13	2,065	2,295	18×40	0.037	0.10	2,465	2,740
3,300	16×35.5	0.044	0.13	2,065	2,295	18×40	0.037	0.10	2,465	2,740					
4,700	18×40	0.037	0.10	2,465	2,740										



Dimension:  $\phi$  D×L(mm)  
 Impedance:  $\Omega$ / at 100k Hz  
 Ripple Current: mA/rms at 105°C

### Dimension and Permissible Ripple Current

Rated Volt. (Voc) Contents Cap. ( $\mu$ F)	63V (1J)					100V (2A)				
	$\phi$ D×L	Impedance ( $\Omega$ , max./100k Hz)		Ripple Current (mA/rms, 105°C)		$\phi$ D×L	Impedance ( $\Omega$ , max./100k Hz)		Ripple Current (mA/rms, 105°C)	
		20°C	-10°C	120 Hz	100k Hz		20°C	-10°C	120 Hz	100k Hz
2.2						5×11	6.00	21.0	40	72
3.3						5×11	5.00	18.0	43	78
4.7						6.3×11	1.20	4.20	100	180
6.8						6.3×11	1.20	4.20	100	180
10	6.3×11	1.20	4.20	100	180	8×11.5	0.56	2.00	168	305
22	6.3×11	1.20	4.20	100	180	8×11.5	0.56	2.00	168	308
33	8×11.5	0.56	2.00	170	305	10×12.5	0.50	1.80	210	380
39	8×11.5	0.56	2.00	170	305	10×16	0.32	1.10	350	500
47	8×11.5	0.56	2.00	170	305	10×20	0.27	0.95	435	620
56	10×12.5	0.50	1.80	265	380	10×20	0.27	0.95	435	620
68	10×12.5	0.50	1.80	265	380	10×25	0.21	0.63	530	760
100	10×20	0.27	0.95	435	620	12.5×20	0.16	0.56	625	890
220	12.5×20	0.094	0.24	570	820	16×25	0.090	0.32	1,010	1,440
330	12.5×25	0.073	0.21	770	1,100	16×31.5	0.060	0.17	1,255	1,790
390	12.5×25	0.073	0.21	770	1,100	16×35.5	0.056	0.14	1,650	2,065
470	16×25	0.060	0.18	1,420	1,770					
560	16×31.5	0.048	0.14	1,625	2,030					
680	16×31.5	0.048	0.14	1,625	2,030					
1,000	18×35.5	0.041	0.11	1,790	2,240					

### Part Numbering System

RXJ Series    470 $\mu$ F     $\pm$ 20%    6.3V    Bulk Package    Gas Type    10  $\phi$  × 12.5L    Pb-free and PET sleeve  
**RXJ**    **471**    **M**    **0J**    **BK**    -    **1012**  
 Series Name    Capacitance    Capacitance Tolerance    Rated Voltage    Lead Configuration and Package    Rubber Type    Case Size    Lead Wire and Sleeve type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 13.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Lelon:

[RXJ010M2ABK-0511P](#) [RXJ101M2ABK-1320P](#) [RXJ102M1EBK-1325P](#) [RXJ331M1CBK-1012P](#) [RXJ470M1HBK-0611P](#) [RXJ100M1HBK-0511P](#) [RXJ100M2ABK-0811P](#) [RXJ101M1CBK-0611P](#) [RXJ101M1EBK-0811P](#) [RXJ102M1CBK-1320P](#) [RXJ220M1HBK-0611P](#) [RXJ220M2ABK-0811P](#) [RXJ221M1CBK-0811P](#) [RXJ221M1EBK-1012P](#) [RXJ221M1HBK-1025P](#) [RXJ222M1CBK-1325P](#) [RXJ2R2M2ABK-0511P](#) [RXJ330M1EBK-0511P](#) [RXJ330M1HBK-0611P](#) [RXJ331M1EBK-1016P](#) [RXJ331M1HBK-1320P](#) [RXJ332M1CBK-1632P](#) [RXJ470M1EBK-0611P](#) [RXJ470M2ABK-1020P](#) [RXJ471M1CBK-1016P](#) [RXJ471M1EBK-1020P](#) [RXJ471M1HBK-1325P](#) [RXJ4R7M1HBK-0511P](#) [RXJ4R7M2ABK-0611P](#) [RXJ470M1VSA0611](#) [RXJ101M1VTA0811](#) [RXJ471M1CSA1016](#) [RXJ330M1EBK-0511](#) [RXJ102M1VBK-1325](#) [RXJ331M1HBK-1320](#) [RXJ101M2ABK-1320](#) [RXJ470M2ABK-1020](#) [RXJ100M1HBK-0511](#) [RXJ100M2ABK-0811](#) [RXJ101M1CBK-0611](#) [RXJ101M1EBK-0811](#) [RXJ102M1CBK-1320](#) [RXJ102M1EBK-1325](#) [RXJ221M1CBK-0811](#) [RXJ221M1EBK-1012](#) [RXJ221M1HBK-1025](#) [RXJ222M1CBK-1325](#) [RXJ2R2M2ABK-0511](#) [RXJ330M1HBK-0611](#) [RXJ331M1CBK-1012](#) [RXJ331M1EBK-1016](#) [RXJ332M1CBK-1632](#) [RXJ470M1EBK-0611](#) [RXJ471M1HBK-1325](#) [RXJ4R7M1HBK-0511](#) [RXJ4R7M2ABK-0611](#)