






**NOTES:**

Current Rating:0.5AMP  
 Contact Resistance:30mΩ max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:500MΩ min  
 Operation Temperature:-40℃ to +85℃

Contact Material:Phosphor Bronze  
 Contact plating:Au or Sn Over Ni  
 Earth-Plate Material:Brass  
 Earth-plate plating:Sn all over Ni  
 Insulator Material:Polyester (UL94V-0)  
 Standard :Housing LCP+30%G.F  
 Slider PPS+30%G.F

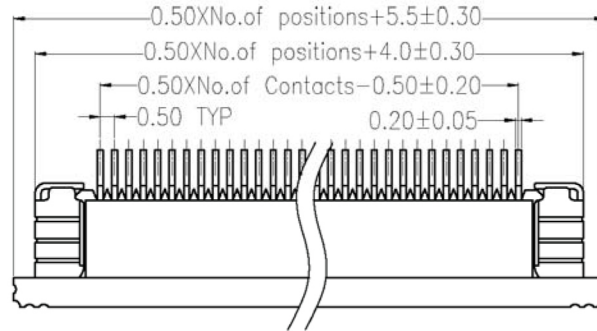

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE $\pm 0.05$ )

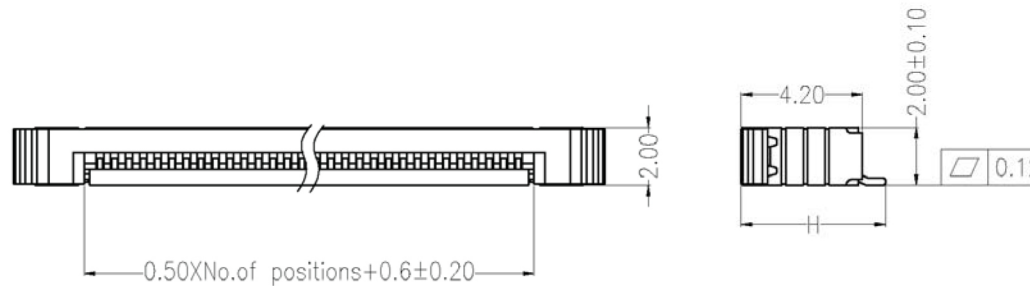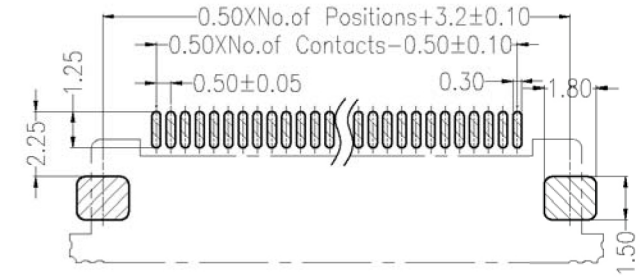

**Dimensional & Ordering Information:**

Circuit	Part No.	Dimension H
24	SEA8056-24	5.20
28	SEA8056-28	5.20
29	SEA8056-29	5.20
36	SEA8056-36	5.70
45	SEA8058-45	5.70

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	SCALE	3:1
					X.X	$\pm 0.40$			
A0	09/01/09	NEW			X.XX	$\pm 0.25$	DESIGN	UNIT	mm
					X.XXX	$\pm 0.15$	CHECK	SIZE	A4
					Angle	$\pm 3'$	APPROVE	SHEET	1/1
					DIM	TOL	APPROVE	PROJ.	

**Displaytech**  
 a seacomp company

Displaytech - a SEACOMP company  
 5840 El Camino Real, Suite 108, Carlsbad, CA 92008  
 www.displaytech-us.com  
 sales@displaytech-us.com

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Displaytech:](#)

[SEA8058-45](#) [SEA8056-28](#) [SEA8056-36](#)