# SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283

CSA CERTIFIED: CSA 22.2, # 0,0.4,8

VDE APPROVED: EN 60939-2

### OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 10 AMP/40°C, 120/250 VAC

I THE EREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

**ERECLIENCY** 

MHz

CDMMDN

dΒ

DIFF

dΒ

.05 . 10 . 15

20 27 31 45 45 44 46 47 53 44

14

12 30 65 80 84

.50 | 1.0

2.0 5.0

> 78 70

30

50

60

10 20

EACH LINE TO GROUND: 0.16 mA@ 120V 60Hz 0.28 mA@ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ic. IN AN AMBIENT,  $T_0$ , HIGHER THAN 40°C, THE MAXIMUM DPERATING CURRENT,  $I_0$ , IS AS FOLLOWS:  $I_0 = I_0 - \sqrt{100 - I_0}$ 

100 - Tα  $I_0 = I_r - /$ 60

# RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES IC FOR 8 SECONDS

#### CATALOG # 10ERK1 # APPRVD. DATE PJO 12DEC08 08-031152

CORCOM PRODUCTS, 620 S. BUTTERFIELD RD. MUNDELEIN IL 60060

POWER LINE FILTER

ATALOG NO

10ERK1

4

TYCO ELECTRONICS PART NO.

CUSTOMER DRAWING

# TEST SPECIFICATIONS:

INDUCTANCE: 4.97 mH NOMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0044 μF ±20% LINE TO LINE: 0.741 μF±20% DISCHARGE RESISTOR: 470k ∩

I/G AND I/L I.R.

6000M₁ (MIN.) **@** 100VDC, NO DISCHARGE RESISTOR:


20°C AND 50% RH

# RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 2250 VDC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

#### FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

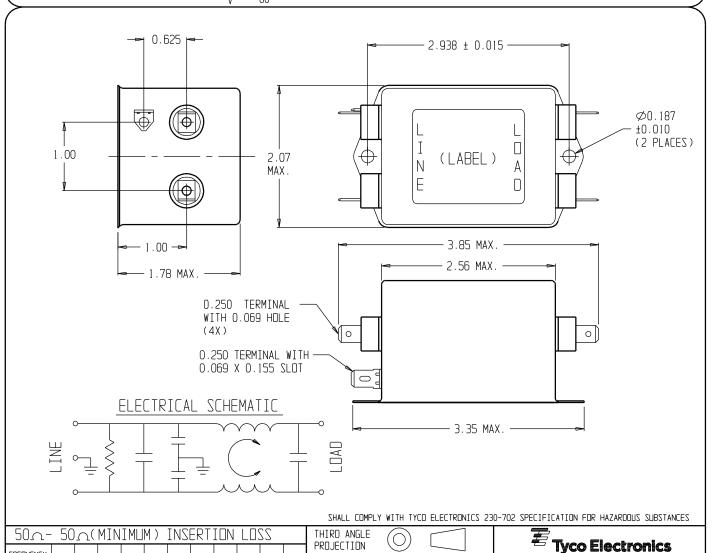

UNLESS OTHERWISE SPECIFIED,

MATERIAL & FINISH: AS SUPPLIED

THATESTAL & FINITS. AS SEPTELED

THIS INFORMATION IS CONFIGENTIAL AND PROPRIETARY TO TYCO ELECTRONICS PART NO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES SCALE:

NTS DATE:

OARD AFFILIARS. IT MAY NOT BE DISCLOSED TO ANYONG DIHER THAN TYCO ELECTRONICS PRESUNEL, WITHOUT WRITTEN AUTHORIZATION PROMITYCO ELECTRONICS CORPORATION.

ORN. BY:

ORIG. PHANSYLVANIA USA

PJD

TOLERANCE TO BE ±.025

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{TE Connectivity}}{\frac{10\text{ERK1}}{}}$