



# SM24QC


Dual Line CAN bus protection Diode

## CAN BUS ESD PROTECTION DIODES


### Features

- ◆ 200W peak pulse power (8/20μs)
- ◆ IEC61000-4-2 (ESD) ±15kV (air), ±8kV (contact)
- ◆ IEC61000-4-4 (EFT) 40A (5/50ns)
- ◆ IEC61000-4-5 (Lighting) 3A (8/20μs)
- ◆ Y [ I \ a \* A ] | c e ^ • A G X
- ◆ S [ , A | c e ] a \* A ] | c e ^
- ◆ Low leakage current

### Pin Configuration



### Circuit Diagram

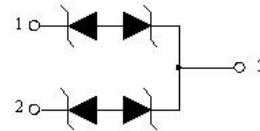

### Applications

- ◆ DeviceNet
- ◆ Low and High Speed CAN
- ◆ Smart Distribution Systems (SDS)
- ◆ Controlled Area Network – CAN 2.1 / CAN FD

### Mechanical Characteristics

- ◆ Package: SOT-23
- ◆ Lead Finish: Matte Tin
- ◆ Flammability Rating: UL 94V-0
- ◆ Packaging: Tape and Reel
- ◆ Marking: C24

### PACKAGE SPECIFICATIONS

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (pcs)	Box Size (mm)	QTY/Box (pcs)	Carton Size (mm)	Q'TY/Carton (pcs)
SOT-23	7'	330	3000	203×203×195	45000	438×438×220	180000

### Absolute Maximum Ratings (T<sub>A</sub>=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
ESD per IEC 61000-4-2 (Air)	V <sub>ESD</sub>	± 30	kV
ESD per IEC 61000-4-2 (Contact)		± 20	
Peak Pulse Power(tp=8/20us waveform)	P <sub>PP</sub>	200	W
Operating Temperature	T <sub>OPT</sub>	-55 to +150	°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150	°C
Lead Solder Temperature – Maximum (10 Second Duration)	T <sub>L</sub>	260(10 sec.)	°C

The above data are for reference only.



# SM24QC

## Dual Line CAN bus protection Diode

### Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise specified)

Symbol	Param	Test Condition	Min	Typ	Max	Units
V <sub>RWM</sub>	Reverse Working Voltage	Pin 1,2,to Pin3			24	V
V <sub>BR</sub>	Reverse Breakdown Voltage	I <sub>T</sub> = 1mA Pin 1,2,to Pin3	26		32	V
I <sub>R</sub>	Reverse Leakage Current	V <sub>RWM</sub> = 24V Pin 1,2,to Pin3			1.0	μA
V <sub>C</sub>	Clamping Voltage	I <sub>PP</sub> = 1A, t <sub>p</sub> = 8/20μs Pin 1,2,to Pin3			36	V
		I <sub>PP</sub> = 3A, t <sub>p</sub> = 8/20μs Pin 1,2,to Pin3			50	V
C <sub>J</sub>	Junction Capacitance	V <sub>R</sub> = 0V, f = 1MHz Pin 1,2,to Pin3		13	17	pF


The above data are for reference only.




# SM24QC

## Dual Line CAN bus protection Diode

### ELECTRICAL CHARACTERISTICS CURVE

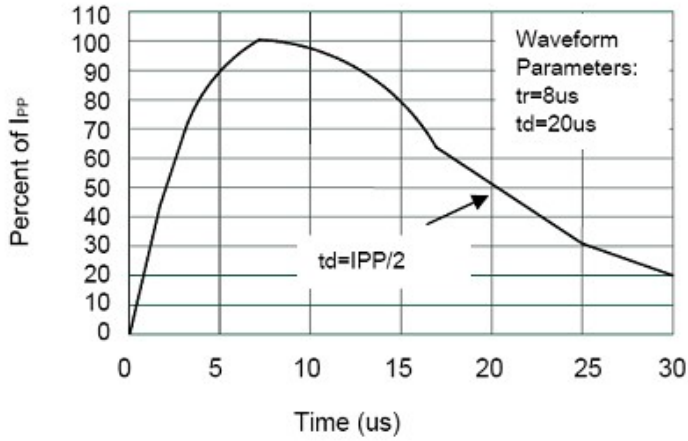

**Pulse Waveform**

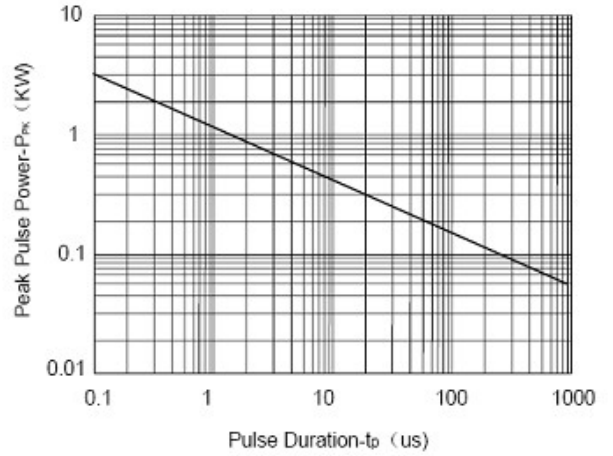


**Non-Repetitive Peak Pulse Power vs. Pulse Time**

The above data are for reference only.


### Outline Drawing

#### SOT-23 Package Outline Dimensions

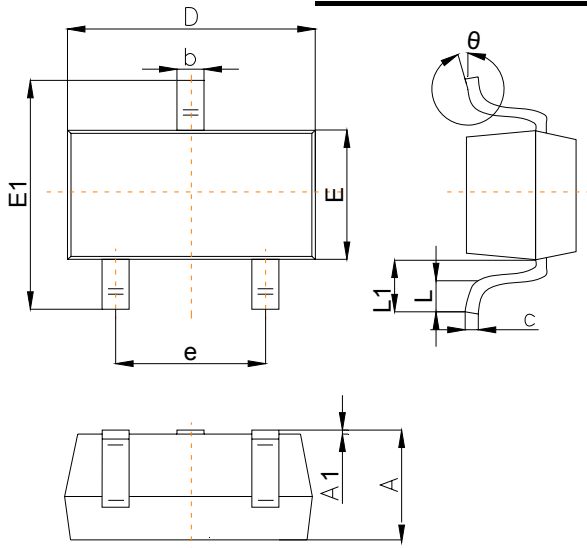

Symbol	Dimensions In Millimeters		
	Min	Typ	Max
A	1.00		1.40
A1			0.10
b	0.35		0.50
c	0.10		0.20
D	2.70	2.90	3.10
E	1.40		1.60
E1	2.4		2.80
e		1.90	
L	0.10		0.30
L1	0.4		
$\theta$	0°		10°

### Suggested Pad Layout

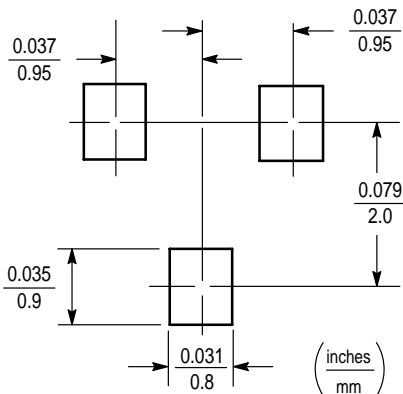

**Note:**

1. Controlling dimension: in/millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

### Important Notice and Disclaimer

Microdiode Electronics (Jiangsu) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Microdiode Electronics (Jiangsu) makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Microdiode Electronics (Jiangsu) assume any liability for application assistance or customer product design. Microdiode Electronics (Jiangsu) does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Microdiode Electronics (Jiangsu).

Microdiode Electronics (Jiangsu) products are not authorized for use as critical components in life support devices or systems without express written approval of Microdiode Electronics (Jiangsu).