



FINISHED LENGTH (SEE TABLE)

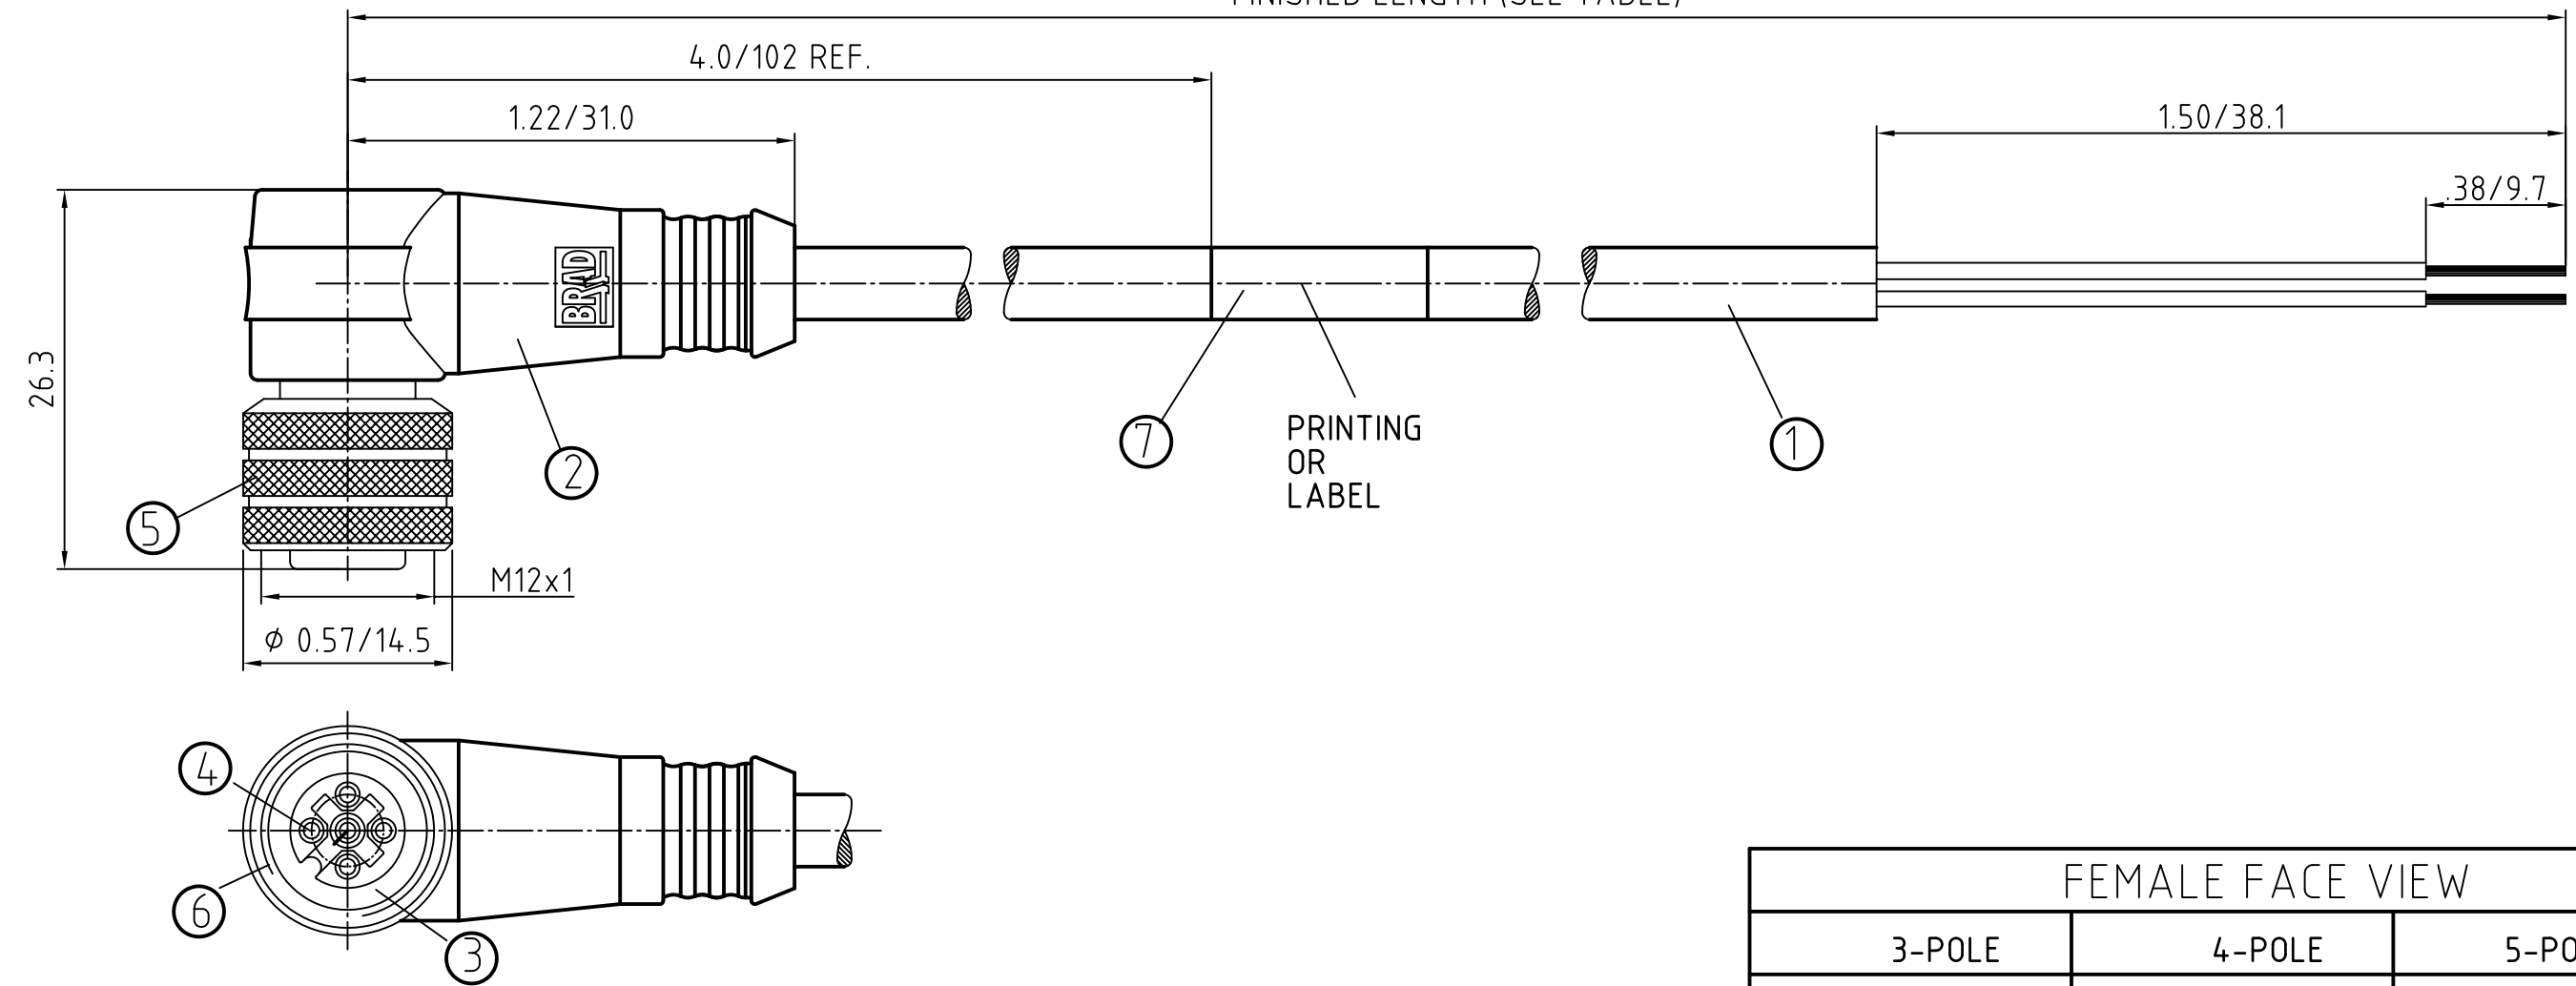

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	RED
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	PUR	BLACK
2	OVERMOLD	POLYURETHANE (PUR)	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PUR	BLACK

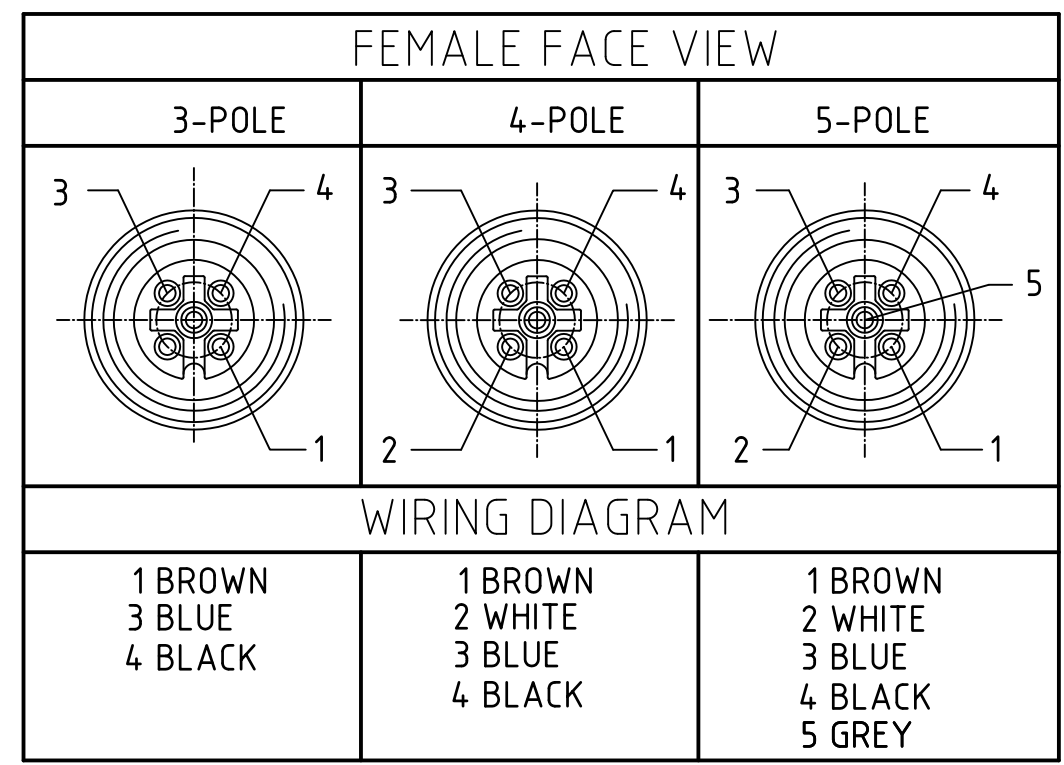

DESCRIPTION EC NO: WEU2010-0284 DRWN: LSTEMMLE 2010/01/20 CH'KD: NS APPR: NSTAUDIG 2010/01/26	QUALITY SYMBOLS ▽ = 0 ∇ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±--- ±.01 1 PLACE ±0.3 ±--- ANGULAR ± --- °	DIMENSION STYLE IN/MM DRAWN BY DATE CHECKED BY DATE RE 2010/01/21 APPROVED BY DATE NSTAUDIG 2010/01/25	SCALE 2:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE SHEET 2	MATERIAL NO. SD-120065-043 DOCUMENT NO. SD-120065-043 SHEET NO. 1 OF 1
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	MOLEX INCORPORATED MICRO-CHANGE CORDSET 3/4/5-POL FE 90 SE 22/3-5 BLACK PUR CABLE			

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200060011	803001P03M020	6.56' +3.5" -0 [2.0M +89 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200060024	804001P03M020	6.56' +3.5" -0 [2.0M +89 -0]
4	1200652147	804001P03M040	13.12' +6.5" -0 [4.0M +165 -0]
4	1200060025	804001P03M050	16.40' +6.5" -0 [5.0M +165 -0]
4	1200658206	804001P03M060	19.69' +6.5" -0 [6.0M +165 -0]
4	1200651787	804001P03M100	32.81' +12.5" -0 [10.0M +318 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200060663	805001P03M020	6.56' +3.5" -0 [2.0M +89 -0]
5	1200658184	805001P03M040	13.12' +6.5" -0 [4.0M +165 -0]
5	1200651793	805001P03M050	16.40' +6.5" -0 [5.0M +165 -0]
5	1200652156	805001P03M060	19.69' +6.5" -0 [6.0M +165 -0]
5	1200060664	805001P03M100	32.81' +12.5" -0 [10.0M +318 -0]

DESCRIPTION EC NO.: WEU2010-0284 DRWN: LSTEMMLE 2010/01/20 CHKD: NS APPR: NSTAUDIG 2010/01/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
	= 0 = 0	mm	INCH	IN/MM		2:1	METRIC	MICRO-CHANGE CORDSET 3/4/5-POL FE 90 SE 22/3-5 BLACK PUR CABLE		
	4 PLACES ±---	±---	±---	DRAWN BY	DATE					
	3 PLACES ±---	±---	±---	CHECKED BY	DATE					
	2 PLACES ±---	±.01	±.01	RE	2010/01/21					
1 PLACE ±0.3	±---	±---	APPROVED BY	DATE						
ANGULAR ± --- °			NSTAUDIG	2010/01/25	MATERIAL NO.		MOLEX INCORPORATED			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		DOCUMENT NO.		SD-120065-043		SHEET NO. 1 OF 1		
1	REV	SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						