

Features

- Small Body Outline Dimensions:
0.60 mm x 0.30 mm
- Bidirectional ESD Protection of one line
- Low Clamping Voltage
- Low Capacitance: 3.0 pF
- Working Voltage: 5 V
- Low Leakage Current

IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 10\text{kV}$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 3A (8/20 μs)



Mechanical Characteristics

- DFN0603-D package
- Molding compound flammability rating:
UL 94V-0
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
RoHS Compliant

Applications

- Cellular handsets and accessories
- Portable electronics
- Communication systems
- Computers and peripherals


Schematic & PIN Configuration

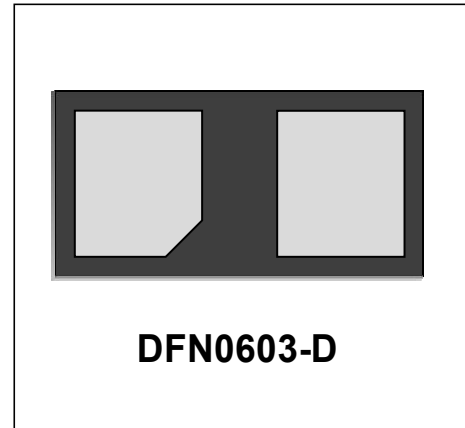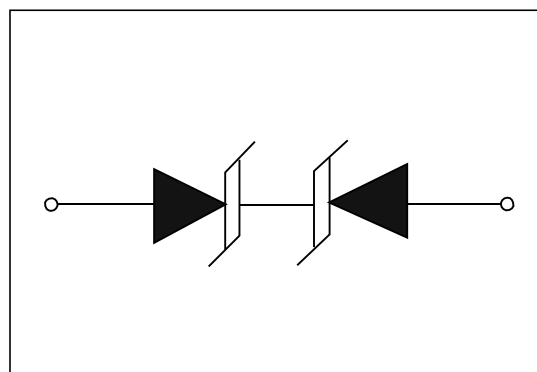

Absolute Maximum Rating			
Rating	Symbol	Value	Units
Electrostatic discharge Voltage	V_{ESD}	10KV (contact)	Volts
		15KV (air)	
Peak Pulse Current($t_p=8/20\mu s$)	I_{pp}	3.0	A
Operating Temperature	T_J	-55 to + 125	$^{\circ}C$
Storage Temperature	T_{STG}	-55 to +150	$^{\circ}C$

Electrical Parameters (T=25 $^{\circ}C$)

Symbol	Parameter
I_{PP}	Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

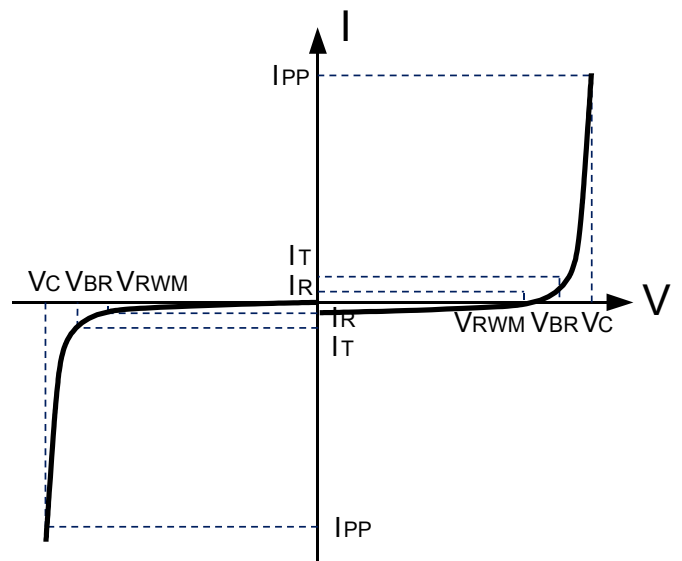

Electrical Characteristics

BDFN1C051L						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				5.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	6.0			V
Reverse Leakage Current	I_R	$V_{RWM}=5V, T=25^{\circ}C$			1	μA
Clamping Voltage	V_C	$I_{PP}=1A, t_p=8/20\mu s$			9	V
		$I_{PP}=3A, t_p=8/20\mu s$			11	
Junction Capacitance	C_j	$V_R = 0V, f = 1MHz$		2.0	3.5	pF

Note1: ESD Pulse Waveform according to IEC 61000-4-2. see Table1 and Figure4.

Note2: ESD tests Setup see Figure 5.

Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

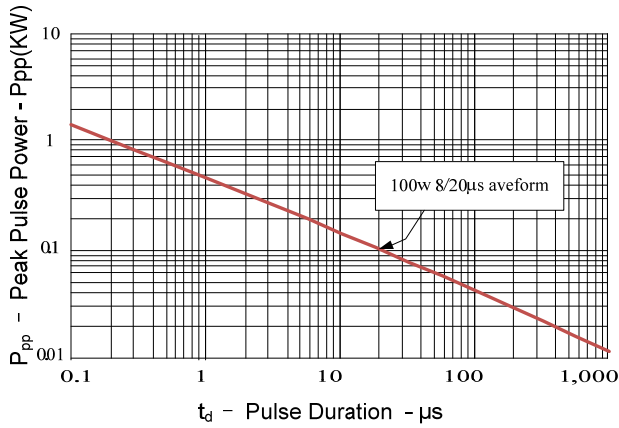


Figure 2: Power Derating Curve

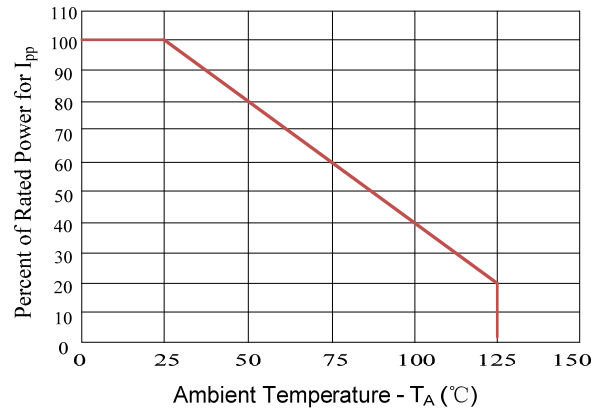


Figure 3: Pulse Waveform


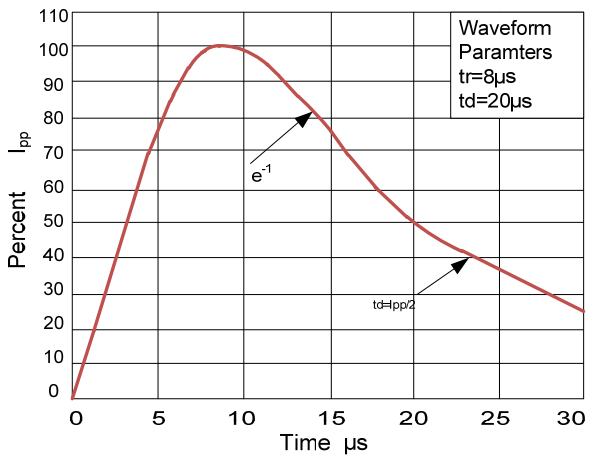


Figure 4: Clamping Voltage vs. I_pp

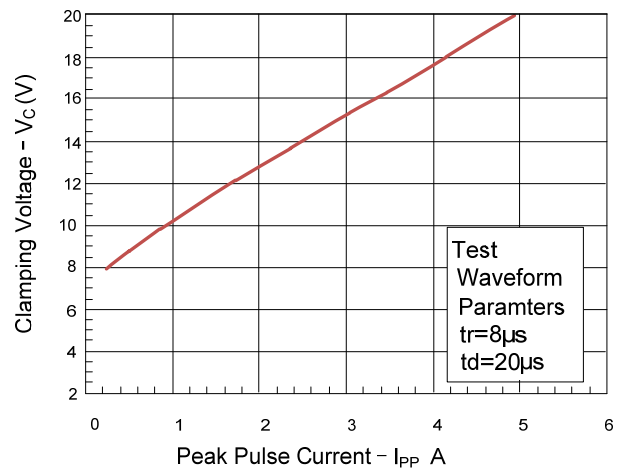

Outline Drawing –DFN0603-D

PACKAGE OUTLINE

DFN0603-D

SYMBOL	MILIMETER	
	MIN	MAX
A	0.28	0.32
D	0.55	0.65
E	0.25	0.35
b	0.20	0.30
e	0.350	
m	0.165	
h	0.14	0.24

Land Pattern

Marking Codes

Part Number	Marking Code
BDFN1C051L	F

Package Information

Qty: 15k/Reel