

# MC14584B

## Hex Schmitt Trigger

The MC14584B Hex Schmitt Trigger is constructed with MOS P-channel and N-channel enhancement mode devices in a single monolithic structure. These devices find primary use where low power dissipation and/or high noise immunity is desired. The MC14584B may be used in place of the MC14069UB hex inverter for enhanced noise immunity to “square up” slowly changing waveforms.

### Features

- Supply Voltage Range = 3.0 Vdc to 18 Vdc
- Capable of Driving Two Low-power TTL Loads or One Low-power Schottky TTL Load over the Rated Temperature Range
- Double Diode Protection on All Inputs
- Can Be Used to Replace MC14069UB
- For Greater Hysteresis, Use MC14106B which is Pin-for-Pin Replacement for CD40106B and MM74C14
- Pb-Free Packages are Available

### MAXIMUM RATINGS (Voltages Referenced to $V_{SS}$ )

| Symbol            | Parameter   | Value                  | Unit        |
|-------------------|---|------------------------|-------------|
| $V_{DD}$          | DC Supply Voltage Range                           | -0.5 to +18.0          | V           |
| $V_{in}, V_{out}$ | Input or Output Voltage Range (DC or Transient)   | -0.5 to $V_{DD} + 0.5$ | V           |
| $I_{in}, I_{out}$ | Input or Output Current (DC or Transient) per Pin | $\pm 10$               | mA          |
| $P_D$             | Power Dissipation, per Package (Note 1)           | 500                    | mW          |
| $T_A$             | Ambient Temperature Range                         | -55 to +125            | $^{\circ}C$ |
| $T_{stg}$         | Storage Temperature Range                         | -65 to +150            | $^{\circ}C$ |
| $T_L$             | Lead Temperature (8-Second Soldering)             | 260                    | $^{\circ}C$ |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

#### 1. Temperature Derating:

Plastic “P and D/DW” Packages: - 7.0 mW/ $^{\circ}C$  From 65 $^{\circ}C$  To 125 $^{\circ}C$


This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation,  $V_{in}$  and  $V_{out}$  should be constrained to the range  $V_{SS} \leq (V_{in} \text{ or } V_{out}) \leq V_{DD}$ .

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either  $V_{SS}$  or  $V_{DD}$ ). Unused outputs must be left open.




ON Semiconductor®


### MARKING DIAGRAMS




PDIP-14  
P SUFFIX  
CASE 646




SOIC-14  
D SUFFIX  
CASE 751A



TSSOP-14  
DT SUFFIX  
CASE 948G



SOEIAJ-14  
F SUFFIX  
CASE 965



- A = Assembly Location
- WL, L = Wafer Lot
- YY, Y = Year
- WW, W = Work Week
- G or ■ = Pb-Free Package


(Note: Microdot may be in either location)

### ORDERING INFORMATION


See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

# MC14584B


## PIN ASSIGNMENT



## LOGIC DIAGRAM

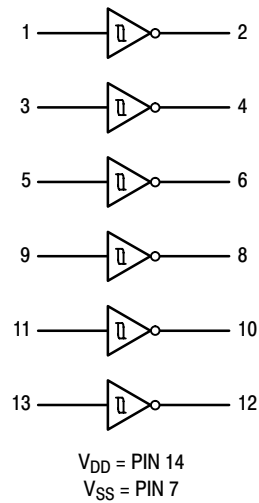

## EQUIVALENT CIRCUIT SCHEMATIC (1/6 OF CIRCUIT SHOWN)



## ORDERING INFORMATION

| Device        | Package                | Shipping <sup>†</sup> |
|---------------|------------------------|-----------------------|
| MC14584BCP    | PDIP-14                | 25 Units / Rail       |
| MC14584BCPG   | PDIP-14<br>(Pb-Free)   |                       |
| MC14584BD     | SOIC-14                | 55 Units / Rail       |
| MC14584BDG    | SOIC-14<br>(Pb-Free)   |                       |
| MC14584BDR2   | SOIC-14                | 2500 / Tape & Reel    |
| MC14584BDR2G  | SOIC-14<br>(Pb-Free)   |                       |
| MC14584BDTR2  | TSSOP-14*              |                       |
| MC14584BDTR2G | TSSOP-14*              |                       |
| MC14584BF     | SOEIAJ-14              | 50 Units / Rail       |
| MC14584BFG    | SOEIAJ-14<br>(Pb-Free) |                       |
| MC14584BFEL   | SOEIAJ-14              | 2000 / Tape & Reel    |
| MC14584BFELG  | SOEIAJ-14<br>(Pb-Free) |                       |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*This package is inherently Pb-Free.

# MC14584B

## ELECTRICAL CHARACTERISTICS (Voltages Referenced to V<sub>SS</sub>)

| Characteristic   | Symbol                        | V <sub>DD</sub><br>Vdc | - 55°C  |      | 25°C   |                    |      | 125°C  |      | Unit |
|--|-------------------------------|------------------------|---|------|--------|--------------------|------|--------|------|------|
|  |                               |                        | Min   | Max  | Min    | Typ <sup>(2)</sup> | Max  | Min    | Max  |      |
| Output Voltage<br>V <sub>in</sub> = V <sub>DD</sub><br><br>V <sub>in</sub> = 0   | "0" Level<br>V <sub>OL</sub>  | 5.0                    | -   | 0.05 | -      | 0                  | 0.05 | -      | 0.05 | Vdc  |
|  |                               | 10                     | -   | 0.05 | -      | 0                  | 0.05 | -      | 0.05 |      |
|  |                               | 15                     | -   | 0.05 | -      | 0                  | 0.05 | -      | 0.05 |      |
|  | "1" Level<br>V <sub>OH</sub>  | 5.0                    | 4.95  | -    | 4.95   | 5.0                | -    | 4.95   | -    |      |
|  |                               | 10                     | 9.95  | -    | 9.95   | 10                 | -    | 9.95   | -    |      |
|  |                               | 15                     | 14.95   | -    | 14.95  | 15                 | -    | 14.95  | -    |      |
| Output Drive Current<br>(V <sub>OH</sub> = 2.5 Vdc)<br>(V <sub>OH</sub> = 4.6 Vdc)<br>(V <sub>OH</sub> = 9.5 Vdc)<br>(V <sub>OH</sub> = 13.5 Vdc)<br><br>(V <sub>OL</sub> = 0.4 Vdc)<br>(V <sub>OL</sub> = 0.5 Vdc)<br>(V <sub>OL</sub> = 1.5 Vdc) | Source<br>I <sub>OH</sub>     | 5.0                    | - 3.0   | -    | - 2.4  | - 4.2              | -    | - 1.7  | -    | mAdc |
|  |                               | 5.0                    | - 0.64  | -    | - 0.51 | - 0.88             | -    | - 0.36 | -    |      |
|  |                               | 10                     | - 1.6   | -    | - 1.3  | - 2.25             | -    | - 0.9  | -    |      |
|  |                               | 15                     | - 4.2   | -    | - 3.4  | - 8.8              | -    | - 2.4  | -    |      |
|  | Sink<br>I <sub>OL</sub>       | 5.0                    | 0.64  | -    | 0.51   | 0.88               | -    | 0.36   | -    |      |
|  |                               | 10                     | 1.6   | -    | 1.3    | 2.25               | -    | 0.9    | -    |      |
| 15   | 4.2                           | -                      | 3.4   | 8.8  | -      | 2.4                | -    | -      |      |      |
| Input Current  | I <sub>in</sub>               | 15                     | -   | ±0.1 | -      | ±0.00001           | ±0.1 | -      | ±1.0 | µAdc |
| Input Capacitance<br>(V <sub>in</sub> = 0)   | C <sub>in</sub>               | -                      | -   | -    | -      | 5.0                | 7.5  | -      | -    | pF   |
| Quiescent Current<br>(Per Package)   | I <sub>DD</sub>               | 5.0                    | -   | 0.25 | -      | 0.0005             | 0.25 | -      | 7.5  | µAdc |
|  |                               | 10                     | -   | 0.5  | -      | 0.0010             | 0.5  | -      | 15   |      |
|  |                               | 15                     | -   | 1.0  | -      | 0.0015             | 1.0  | -      | 30   |      |
| Total Supply Current <sup>(3) (4)</sup><br>(Dynamic plus Quiescent,<br>Per Package)<br>(C <sub>L</sub> = 50 pF on all outputs, all<br>buffers switching)   | I <sub>T</sub>                | 5.0                    | I <sub>T</sub> = (1.8 µA/kHz) f + I <sub>DD</sub> |      |        |                    |      |        |      | µAdc |
|  |                               | 10                     | I <sub>T</sub> = (3.6 µA/kHz) f + I <sub>DD</sub> |      |        |                    |      |        |      |      |
|  |                               | 15                     | I <sub>T</sub> = (5.4 µA/kHz) f + I <sub>DD</sub> |      |        |                    |      |        |      |      |
| Hysteresis Voltage   | V <sub>H</sub> <sup>(5)</sup> | 5.0                    | 0.27  | 1.0  | 0.25   | 0.6                | 1.0  | 0.21   | 1.0  | Vdc  |
|  |                               | 10                     | 0.36  | 1.3  | 0.3    | 0.7                | 1.2  | 0.25   | 1.2  |      |
|  |                               | 15                     | 0.77  | 1.7  | 0.6    | 1.1                | 1.5  | 0.50   | 1.4  |      |
| Threshold Voltage<br>Positive-Going<br><br>Negative-Going  | V <sub>T+</sub>               | 5.0                    | 1.9   | 3.5  | 1.8    | 2.7                | 3.4  | 1.7    | 3.4  | Vdc  |
|  |                               | 10                     | 3.4   | 7.0  | 3.3    | 5.3                | 6.9  | 3.2    | 6.9  |      |
|  |                               | 15                     | 5.2   | 10.6 | 5.2    | 8.0                | 10.5 | 5.2    | 10.5 |      |
|  | V <sub>T-</sub>               | 5.0                    | 1.6   | 3.3  | 1.6    | 2.1                | 3.2  | 1.5    | 3.2  |      |
|  |                               | 10                     | 3.0   | 6.7  | 3.0    | 4.6                | 6.7  | 3.0    | 6.7  |      |
|  |                               | 15                     | 4.5   | 9.7  | 4.6    | 6.9                | 9.8  | 4.7    | 9.9  |      |

2. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

3. The formulas given are for the typical characteristics only at 25°C.

4. To calculate total supply current at loads other than 50 pF:

$$I_T(C_L) = I_T(50 \text{ pF}) + (C_L - 50) \text{ Vfk}$$

where: I<sub>T</sub> is in µA (per package), C<sub>L</sub> in pF, V = (V<sub>DD</sub> - V<sub>SS</sub>) in volts, f in kHz is input frequency, and k = 0.001.

5. V<sub>H</sub> = V<sub>T+</sub> - V<sub>T-</sub> (But maximum variation of V<sub>H</sub> is specified as less than V<sub>T+max</sub> - V<sub>T-min</sub>).

## SWITCHING CHARACTERISTICS (C<sub>L</sub> = 50 pF, T<sub>A</sub> = 25°C)


| Characteristic         | Symbol                              | V <sub>DD</sub><br>Vdc | Min | Typ <sup>(6)</sup> | Max | Unit |
|------------------------|-------------------------------------|------------------------|-----|--------------------|-----|------|
| Output Rise Time       | t <sub>TLH</sub>                    | 5.0                    | -   | 100                | 200 | ns   |
|                        |                                     | 10                     | -   | 50                 | 100 |      |
|                        |                                     | 15                     | -   | 40                 | 80  |      |
| Output Fall Time       | t <sub>THL</sub>                    | 5.0                    | -   | 100                | 200 | ns   |
|                        |                                     | 10                     | -   | 50                 | 100 |      |
|                        |                                     | 15                     | -   | 40                 | 80  |      |
| Propagation Delay Time | t <sub>PLH</sub> , t <sub>PHL</sub> | 5.0                    | -   | 125                | 250 | ns   |
|                        |                                     | 10                     | -   | 50                 | 100 |      |
|                        |                                     | 15                     | -   | 40                 | 80  |      |

6. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

# MC14584B

## PACKAGE DIMENSIONS

**PDIP-14**  
CASE 646-06  
ISSUE P

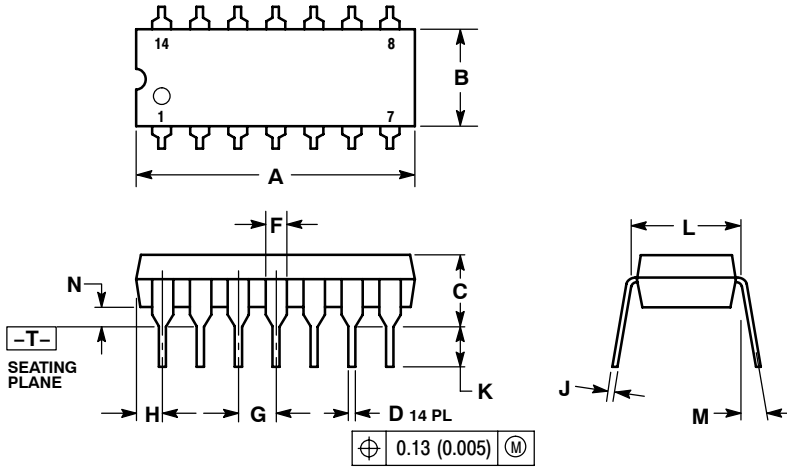

**NOTES:**


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.715     | 0.770 | 18.16       | 19.56 |
| B   | 0.240     | 0.260 | 6.10        | 6.60  |
| C   | 0.145     | 0.185 | 3.69        | 4.69  |
| D   | 0.015     | 0.021 | 0.38        | 0.53  |
| F   | 0.040     | 0.070 | 1.02        | 1.78  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.052     | 0.095 | 1.32        | 2.41  |
| J   | 0.008     | 0.015 | 0.20        | 0.38  |
| K   | 0.115     | 0.135 | 2.92        | 3.43  |
| L   | 0.290     | 0.310 | 7.37        | 7.87  |
| M   | ---       | 10°   | ---         | 10°   |
| N   | 0.015     | 0.039 | 0.38        | 1.01  |

# MC14584B

## PACKAGE DIMENSIONS


SOIC-14  
CASE 751A-03  
ISSUE H

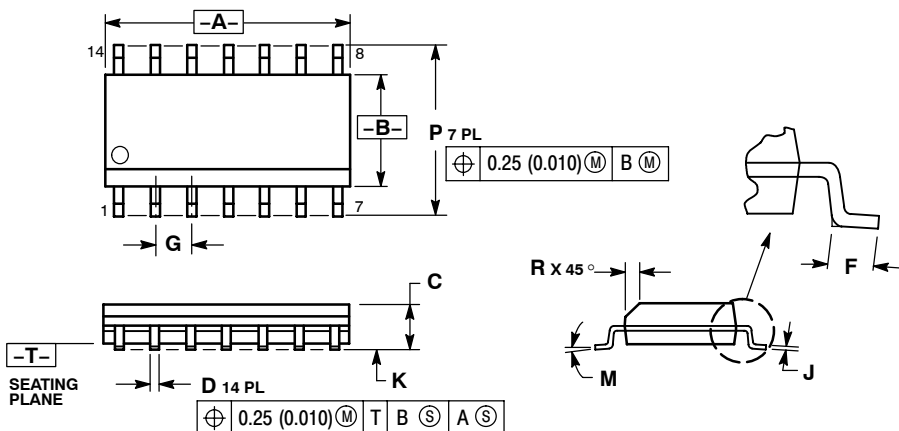

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 8.55        | 8.75 | 0.337     | 0.344 |
| B   | 3.80        | 4.00 | 0.150     | 0.157 |
| C   | 1.35        | 1.75 | 0.054     | 0.068 |
| D   | 0.35        | 0.49 | 0.014     | 0.019 |
| F   | 0.40        | 1.25 | 0.016     | 0.049 |
| G   | 1.27 BSC    |      | 0.050 BSC |       |
| J   | 0.19        | 0.25 | 0.008     | 0.009 |
| K   | 0.10        | 0.25 | 0.004     | 0.009 |
| M   | 0°          | 7°   | 0°        | 7°    |
| P   | 5.80        | 6.20 | 0.228     | 0.244 |
| R   | 0.25        | 0.50 | 0.010     | 0.019 |

### SOLDERING FOOTPRINT\*

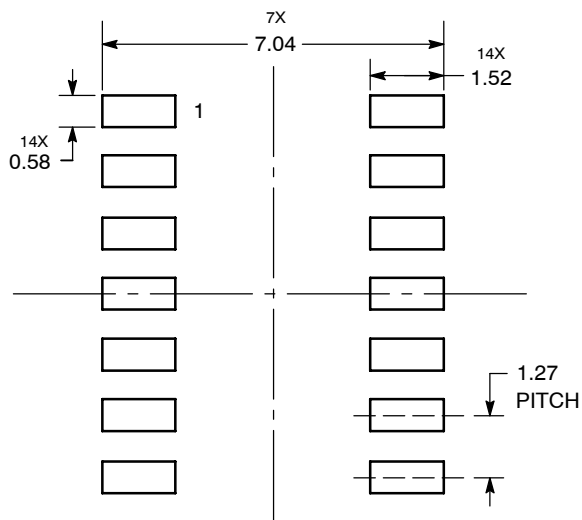

DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.