

Control cables



chainflex® type


















chainflex® cable	Jacket	Shield	Minimum bending radius, moved [factor x d]	Temperatur moved from/to [°C]	Approvals and standards	Oil-resistant	Torsion resistant	v max. [m/s] unsupported	v max. [m/s] gliding	a max. [m/s²]	Page
Control cables											
CF130.UL	PVC		7,5-10	-5/ +70	CE RoHS UL		✓	3	2	20	58
CF140.UL	PVC	✓	7,5-15	-5/ +70	CE RoHS UL			3	2	20	62
CF5	PVC		6,8-7,5	-5/ +70	CE RoHS UL	✓	✓	10	5	80	66
CF6	PVC	✓	6,8-7,5	-5/ +70	CE RoHS UL	✓		10	5	80	70
CF170.D	PUR		7,5-10	-35/ +80	CE RoHS	✓		3	2	20	74
CF180	PUR	✓	7,5-15	-35/ +80	CE RoHS	✓		3	2	20	76
CF77.UL.D	PUR		6,8-7,5	-35/ +80	CE RoHS UL	✓	✓	10	5	80	78
CF78.UL	PUR	✓	6,8-7,5	-35/ +80	CE RoHS UL	✓		10	5	80	82
CF2	PUR	✓	5	-20/ +80	CE RoHS UL	✓		10	5	80	86
CF9	TPE		5	-35/ +100	CE RoHS	✓	✓	10	6	100	90
CF10	TPE	✓	5	-35/ +100	CE RoHS	✓		10	6	100	94
CF9.UL	TPE		5	-35/ +100	CE RoHS UL	✓	✓	10	6	100	98
CF10.UL	TPE	✓	5	-35/ +100	CE RoHS UL	✓		10	6	100	102
CF98	TPE		4	-35/ +90	CE RoHS	✓	✓	10	6	100	106
CF99	TPE	✓	4	-35/ +90	CE RoHS	✓		10	6	100	108

PVC Control cable | CF130.UL

- for medium load requirements
- PVC outer jacket
- flame-retardant








	Conductor	Fine-wire stranded conductor consisting of bare copper wires (following EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Number of cores < 12: cores stranded in a layer with short pitch length. Number of cores ≥ 12: cores combined in bundles and stranded together around a centre for high tensile stresses with adapted, short pitch lengths and pitch directions, especially low-torsion structure.
	Core identification	Cores < 0,5 mm²: Colour code in accordance with DIN 47100 Cores ≥ 0,5 mm²: cores black with white numerals, one core green-yellow
	Outer jacket	Low-adhesion mixture on the basis of PVC, adapted to suit the requirements in energy chains® (following DIN VDE 0281 Part 5). Colour: Silver gray (similar to RAL 7001)
	T/R moved	-5 °C to +70 °C following DIN EN 60811, part 1-4 chapter 8.2. +5 °C to +70 °C for use in energy chains® with > 50.000 cycles. Minimum bending radius 7,5 x d with < 10 m travel distance, minimum bending radius 10 x d with ≥ 10 m travel distance.
	T/R fixed	-20 °C to +70 °C, minimum bending radius 5 x d
	v max. unsupported/gliding	3 m/s, 2 m/s
	a max.	20 m/s²
	Travel distance	Freely suspended travel distances, but also for gliding applications up to 50 m, Class 2
	Torsion	± 90 °, with 1 m cable length
	Nominal voltage	Number of cores < 12: 300/500 V Number of cores < 12 (0,25-0,34): 300/300 V Number of cores ≥ 12: 300/300 V (following DIN VDE 0245).
	Testing voltage	2000 V (following DIN VDE 0281-2).
	Flame-retardant	According to IEC 60332-1-2, CEI 20-35, FT1, VW-1
	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).

 eplan download, configurator ► www.igus.eu/en/CF130

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 4.2.1 (4 medium load requirements 2 travel distance up to 50 m 1 no oil-resistance)

	UL/CSA	Style 10493 and 20200, 300 V, 60 °C
	NFPA	Following NFPA 79-2012 chapter 12.9 (starting from manufacturing date 9/2011)
	CEI	Following CEI 20-35
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)

Typical application area

- for medium load requirements
- without influence of oil
- preferably indoor applications
- especially for freely suspended travel distances, but also for gliding applications up to 50 m
- Wood/stone processing, packaging industry, supply system, handling, adjusting equipment



chainflex® CF130.UL for woodworking. e-chain®: E4/light

... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu





Image exemplary.

Delivery program Part No.	Number of cores and conductor nominal cross section [mm ²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF130.02.03.UL	3 x 0,25	4,5	8	24
CF130.02.04.UL	4 x 0,25	5,5	10	37
CF130.02.06.UL	6 x 0,25	6,0	15	47
CF130.02.07.UL	7 x 0,25	6,5	18	45
CF130.02.12.UL	12 x 0,25	8,5	31	94
CF130.02.20.UL	20 x 0,25	10,5	49	143
CF130.02.25.UL	25 x 0,25	11,5	63	151
CF130.02.30.UL	30 x 0,25	12,5	72	185
CF130.03.02.UL	2 x 0,34	4,5	7	33
CF130.03.05.UL	5 x 0,34	5,5	17	48
CF130.05.02.UL	2 x 0,5	5,5	10	40
CF130.05.03.UL	3 G 0,5	6,0	14	55
CF130.05.04.UL	4 G 0,5	6,5	19	60
CF130.05.05.UL	5 G 0,5	7,0	24	65
CF130.05.07.UL	7 G 0,5	8,0	34	100
CF130.05.12.UL	12 G 0,5	9,5	55	116
CF130.05.18.UL	18 G 0,5	12,0	90	158
CF130.05.25.UL	25 G 0,5	13,5	126	222
CF130.07.02.UL	2 x 0,75	6,0	15	50
CF130.07.03.UL	3 G 0,75	6,5	22	60
CF130.07.04.UL	4 G 0,75	7,0	29	80
CF130.07.05.UL	5 G 0,75	7,5	36	90
CF130.07.07.UL	7 G 0,75	8,5	50	130
CF130.07.12.UL	12 G 0,75	10,5	81	149
CF130.07.18.UL	18 G 0,75	13,0	121	214
CF130.07.25.UL	25 G 0,75	15,5	167	303
CF130.07.36.UL ⁽¹⁾	36 G 0,75	19,0	284	521
CF130.07.42.UL ⁽¹⁾	42 G 0,75	20,5	331	598
CF130.10.02.UL	2 x 1,0	6,0	19	50
CF130.10.03.UL	3 G 1,0	7,0	29	75
CF130.10.04.UL	4 G 1,0	7,5	39	90
CF130.10.05.UL	5 G 1,0	8,0	48	110
CF130.10.07.UL	7 G 1,0	9,0	68	170
CF130.10.12.UL	12 G 1,0	11,5	108	185
CF130.10.18.UL	18 G 1,0	14,0	161	263
CF130.10.25.UL	25 G 1,0	17,0	224	371

(1) Delivery time upon inquiry
 Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
 G = with green-yellow earth core x = without earth core
 * New in this catalog.

Delivery program Part No.	Number of cores and conductor nominal cross section [mm ²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF130.15.02.UL	2 x 1,5	7,5	29	70
CF130.15.03.UL	3 G 1,5	7,0	44	90
CF130.15.04.UL	4 G 1,5	8,0	58	120
CF130.15.05.UL	5 G 1,5	8,5	72	140
CF130.15.07.UL ⁽¹⁷⁾	7 G 1,5	10,5	101	210
CF130.15.12.UL	12 G 1,5	13,0	162	263
CF130.15.18.UL	18 G 1,5	16,5	242	386
CF130.15.25.UL	25 G 1,5	19,5	350	541
CF130.15.36.UL ⁽¹⁾	36 G 1,5	23,5	567	875
CF130.15.42.UL ⁽¹⁾	42 G 1,5	25,5	662	1017
CF130.25.03.UL	3 G 2,5	8,5	72	116
CF130.25.04.UL	4 G 2,5	9,5	96	180
CF130.25.07.UL ⁽¹⁷⁾	7 G 2,5	13,0	168	350
CF130.25.12.UL	12 G 2,5	16,0	265	406
CF130.40.03.UL	3 G 4,0	11,0	115	200
CF130.60.04.UL	4 G 6,0	13,5	230	360
CF130.60.05.UL	5 G 6,0	15,0	288	418

(17) Using the cables with "7 G 1,5 mm²" and "7 G 2,5 mm²" it is essential: bending radius 17 x d with travel distance ≥ 5 m. When the travel distance is not less than 5 m, a bending radius not less than 17 x d has to be used.
 Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
 G = with green-yellow earth core x = without earth core
 * New in this catalog.

New*
New*

New*
New*

- Order example: CF130.05.02.UL – in your desired length (0,5 m steps) CF130.UL chainflex® series .05 Code nominal cross section .02 Number of cores
- Please use www.chainflex.eu/en/CF130 for your online order.
- Available from stock. Delivery in 24h or today!*
*Delivery time means time until shipping of goods.

eplan download, configurator ► www.igus.eu/en/CF130
















950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

... no minimum order quantity ...
 igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu



PVC Control cable | CF140.UL







- for medium load requirements
- PVC outer jacket
- shielded
- flame-retardant

	Conductor	Fine-wire stranded conductor consisting of bare copper wires (following EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Number of cores < 12: cores stranded in a layer with short pitch length. Number of cores ≥ 12: cores combined in bundles and stranded together around a centre for high tensile stresses with adapted, short pitch lengths and pitch directions, especially low-torsion structure.
	Core identification	Cores < 0,5 mm²: Colour code in accordance with DIN 47100 Cores ≥ 0,5 mm²: cores black with white numerals, one core green-yellow
	Inner jacket	PVC mixture adapted to suit the requirements in energy chains®.
	Overall shield	Bending-resistant braiding made of tinned copper wires. Coverage approx. 55% linear, approx. 80% optical.
	Outer jacket	Low-adhesion mixture on the basis of PVC, adapted to suit the requirements in energy chains® (following DIN VDE 0281 Part 5). Colour: Silver gray (similar to RAL 7001)
	T/R moved	-5 °C to +70 °C following DIN EN 60811, part 1-4 chapter 8.2. +5 °C to +70 °C for use in energy chains® with > 50.000 cycles. Minimum bending radius 7,5 x d with < 10 m travel distance, minimum bending radius 15 x d with ≥ 10 m travel distance.
	T/R fixed	-20 °C to +70 °C, minimum bending radius 7,5 x d
	v max. unsupported/gliding	3 m/s, 2 m/s
	a max.	20 m/s ²
	Travel distance	Freely suspended travel distances, but also for gliding applications up to 50 m, Class 2
	Nominal voltage	Number of cores < 12: 300/500 V Number of cores < 12 (0,25-0,34): 300/300 V Number of cores ≥ 12: 300/300 V (following DIN VDE 0245).
	Testing voltage	2000 V (following DIN VDE 0281-2).
	Flame-retardant	According to IEC 60332-1-2, CEI 20-35, FT1, VW-1

 eplan download, configurator ► www.igus.eu/en/CF140

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 4.2.1 (4 medium load requirements 2 travel distance up to 50 m 1 no oil-resistance)

	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
	UL/CSA	Style 10493 and 20200, 300 V, 60 °C
	NFPA	Following NFPA 79-2012 chapter 12.9 (starting from manufacturing date 9/2011)
	CEI	Following CEI 20-35
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)

Typical application area

- for medium load requirements
- without influence of oil
- preferably indoor applications
- especially for freely suspended travel distances, but also for gliding applications up to 50 m
- Wood/stone processing, packaging industry, supply system, handling, adjusting equipment



chainflex® CF140.UL for automatic feeder units. e-chain®: easychain®

... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu





Image exemplary.

Delivery program Part No.	Number of cores and conductor nominal cross section [mm²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]	
CF140.02.12.UL	(12 x 0,25)C	10,0	69	111	
CF140.03.05.UL	(5 x 0,34)C	8,0	42	80	
CF140.05.03.UL	(3 G 0,5)C	8,0	37	87	
CF140.05.05.UL	(5 G 0,5)C	9,0	52	130	
CF140.05.18.UL	(18 G 0,5)C	13,5	130	232	
CF140.05.36.UL	(36 G 0,5)C	20,0	273	493	
CF140.07.03.UL	(3 G 0,75)C	8,5	48	90	
CF140.07.04.UL	(4 G 0,75)C	9,0	57	130	
CF140.07.05.UL	(5 G 0,75)C	9,0	66	150	
CF140.07.07.UL	(7 G 0,75)C	10,5	84	170	
CF140.07.12.UL	(12 G 0,75)C	13,0	130	220	
CF140.07.18.UL	(18 G 0,75)C	15,0	179	289	
CF140.07.25.UL	(25 G 0,75)C	17,5	256	414	
CF140.07.36.UL	(36 G 0,75)C	21,5	397	726	New*
CF140.07.42.UL ⁽¹⁾	(42 G 0,75)C	24,0	444	792	New*
CF140.10.02.UL	(2 x 1,0)C	7,5	33	84	
CF140.10.03.UL	(3 G 1,0)C	8,5	44	130	
CF140.10.04.UL	(4 G 1,0)C	9,5	55	150	
CF140.10.05.UL	(5 G 1,0)C	10,0	77	170	
CF140.10.07.UL	(7 G 1,0)C	11,5	107	200	
CF140.10.12.UL	(12 G 1,0)C	13,5	162	243	
CF140.10.18.UL	(18 G 1,0)C	16,5	227	407	
CF140.10.25.UL	(25 G 1,0)C	18,5	322	481	
CF140.15.03.UL	(3 G 1,5)C	9,5	69	150	
CF140.15.04.UL	(4 G 1,5)C	10,0	89	180	
CF140.15.05.UL	(5 G 1,5)C	11,0	105	220	
CF140.15.07.UL	(7 G 1,5)C	12,5	135	260	
CF140.15.12.UL	(12 G 1,5)C	15,0	215	407	
CF140.15.18.UL	(18 G 1,5)C	18,5	339	467	
CF140.15.25.UL	(25 G 1,5)C	22,0	480	703	
CF140.15.36.UL ⁽¹⁾	(36 G 1,5)C	26,5	683	1137	New*
CF140.15.42.UL ⁽¹⁾	(42 G 1,5)C	29,5	803	1345	New*
CF140.25.03.UL	(3 G 2,5)C	10,5	98	171	
CF140.25.04.UL	(4 G 2,5)C	12,0	174	250	

(1) Delivery time upon inquiry


Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.

G = with green-yellow earth core x = without earth core

* New in this catalog.

 Order example: CF140.10.04.UL – in your desired length (0,5 m steps) CF140.UL chainflex® series .10 Code nominal cross section .04 Number of cores

 Please use www.chainflex.eu/en/CF140 for your online order.

 Delivery time 24h or today.
Delivery time means time until shipping of goods.

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

 eplan download, configurator ► www.igus.eu/en/CF140

... no minimum order quantity ...
igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu

















PVC Control cable | CF5

- for high load requirements
- PVC outer jacket
- oil-resistant
- flame-retardant

**Strip cables
50% faster!**













	Conductor	Fine-wire stranded conductor consisting of bare copper wires (following EN 60228).
	Core insulation	Cores < 0,5 mm²: Mechanically high-quality PP mixture. Cores ≥ 0,5 mm²: Mechanically high-quality PVC mixture (following DIN VDE 0207 Part 4).
	Core stranding	Number of cores < 12: cores stranded in a layer with short pitch length. Number of cores ≥ 12: cores combined in bundles and stranded together around a centre for high tensile stresses with adapted, short pitch lengths and pitch directions, especially low-torsion structure.
	Core identification	Cores < 0,5 mm²: Colour code in accordance with DIN 47100 Cores ≥ 0,5 mm²: cores black with white numerals, one core green-yellow
	Outer jacket	Low-adhesion, oil-resistant mixture on the basis of PVC, adapted to suit the requirements in energy chains® (following DIN VDE 0281 Part 13). Colour: Moss green (similar to RAL 6005)
	CFRIP	Strip cables 50% faster! The tear strip is in the outer jacket. Video ► www.igus.eu/en/CFRIP
	T/R moved	-5 °C to +70 °C following DIN EN 60811, part 1-4 chapter 8.2. +5 °C to +70 °C for use in energy chains® with > 50.000 cycles. Minimum bending radius 6,8 x d with < 10 m travel distance, minimum bending radius 7,5 x d with ≥ 10 m travel distance.
	T/R fixed	-20 °C to +70 °C, minimum bending radius 4 x d
	v max.	10 m/s, 5 m/s
	a max.	80 m/s²
	Travel distance	Freely suspended and gliding travel distances up to 100 m, Class 3
	Torsion	± 90°, with 1 m cable length
	UV-resistant	Medium
	Nominal voltage	300/500 V (following DIN VDE 0245).

 eplan download, configurator ► www.igus.eu/en/CF5

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 5.3.2 (5 high load requirements 3 travel distance up to 100 m 2 oil-resistant)

	Testing voltage	2000 V (following DIN VDE 0281-2).
	Oil	Oil-resistant (following DIN EN 50363-4-1), Class 2.
	Flame-retardant	According to IEC 60332-1-2, CEI 20-35, FT1, VW-1
	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
	UL/CSA	< 0,5 mm²: Style 10492 and 2570, 600 V, 80 °C ≥ 0,5 mm²: Style 11113 and 2570, 600 V, 80 °C
	NFPA	Following NFPA 79-2012 chapter 12.9 (starting from manufacturing date 9/2011)
	CEI	Following CEI 20-35
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)
	Clean room	According to ISO Class 2, material/cable tested by IPA according to ISO standard 14644-1

Typical application area

- for high load requirements
- light oil influence
- preferably indoor applications, but also outdoor ones at temperatures > 5 °C
- especially for freely suspended and gliding travel distances up to 100 m
- Storage and retrieval units for high-bay warehouses, machining units/package machines, quick handling, indoor cranes



chainflex® CF5/CF6 for shelf control units: long travel in the longitudinal axis. e-chain®: Serie E4/00 with igus® guide trough out of steel

... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu



Strip cables 50% faster!

IGUS® CHAINFLEX® CF5




Image exemplary.

Delivery program Part No.	Number of cores and conductor nominal cross section [mm²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF5.02.36	36 x 0,25	15,0	95	275
CF5.03.15	15 x 0,34	10,5	52	135
CF5.03.18	18 x 0,34	11,5	64	175
CF5.03.25	25 x 0,34	13,5	88	235
CF5.05.02	2 x 0,5	6,0	10	34
CF5.05.03	3 G 0,5	6,0	15	42
CF5.05.05	5 G 0,5	7,0	24	72
CF5.05.07	7 G 0,5	8,0	34	77
CF5.05.12	12 G 0,5	11,0	58	158
CF5.05.18	18 G 0,5	12,5	86	230
CF5.05.25	25 G 0,5	16,5	121	310
CF5.05.30	30 G 0,5	17,5	144	402
CF5.07.03	3 G 0,75	6,5	22	63
CF5.07.04	4 G 0,75	7,0	29	72
CF5.07.05	5 G 0,75	7,5	36	85
CF5.07.07	7 G 0,75	9,0	50	108
CF5.07.12	12 G 0,75	12,5	86	240
CF5.07.18	18 G 0,75	15,0	130	322
CF5.07.25	25 G 0,75	17,5	181	432
CF5.07.36	36 G 0,75	22,0	259	564
CF5.07.42	42 G 0,75	23,5	302	610
CF5.10.03	3 G 1,0	6,5	29	62
CF5.10.04	4 G 1,0	7,0	39	85
CF5.10.05	5 G 1,0	9,0	48	100
CF5.10.07	7 G 1,0	9,5	68	145
CF5.10.12	12 G 1,0	13,5	116	260
CF5.10.18	18 G 1,0	16,5	173	450
CF5.10.25	25 G 1,0	19,5	241	590
CF5.15.03	3 G 1,5	7,5	44	95
CF5.15.04	4 G 1,5	7,5	58	120
CF5.15.05	5 G 1,5	8,5	72	170
CF5.15.07 ⁽¹⁷⁾	7 G 1,5	10,5	101	220
CF5.15.12	12 G 1,5	15,0	173	320
CF5.15.18	18 G 1,5	19,0	260	550
CF5.15.25	25 G 1,5	21,5	361	810
CF5.15.36	36 G 1,5	26,0	518	980

⁽¹⁷⁾ Using the cables with "7 G 1,5 mm²" and "7 G 2,5 mm²" it is essential: bending radius 17 x d with travel distance ≥ 5 m. When the travel distance is not less than 5 m, a bending radius not less than 17 x d has to be used.
Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

Delivery program Part No.	Number of cores and conductor nominal cross section [mm²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF5.25.04	4 G 2,5	11,5	96	200
CF5.25.05	5 G 2,5	12,5	120	250
CF5.25.07 ⁽¹⁷⁾	7 G 2,5	14,5	168	340
CF5.25.12	12 G 2,5	23,5	288	667
CF5.25.18	18 G 2,5	27,5	432	970
CF5.25.25	25 G 2,5	32,5	600	1366

⁽¹⁷⁾ Using the cables with "7 G 1,5 mm²" and "7 G 2,5 mm²" it is essential: bending radius 17 x d with travel distance ≥ 5 m. When the travel distance is not less than 5 m, a bending radius not less than 17 x d has to be used.
Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

-  Order example: CF5.07.03 – in your desired length (0,5 m steps)
CF5 chainflex® series .07 Code nominal cross section .03 Number of cores
-  Please use www.chainflex.eu/en/CF5 for your online order.
-  Delivery time 24h or today.
Delivery time means time until shipping of goods.

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)
















 eplan download, configurator ► www.igus.eu/en/CF5

... no minimum order quantity ...
igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu

PVC Control cable | CF6

- for high load requirements
- PVC outer jacket
- shielded
- oil-resistant
- flame-retardant











**Strip cables
50% faster!**

	Conductor	Fine-wire stranded conductor consisting of bare copper wires (following EN 60228).
	Core insulation	Cores < 0,5 mm²: Mechanically high-quality PP mixture. Cores ≥ 0,5 mm²: Mechanically high-quality PVC mixture (following DIN VDE 0207 Part 4).
	Core stranding	Number of cores < 12: cores stranded in a layer with short pitch length. Number of cores ≥ 12: cores combined in bundles and stranded together around a centre for high tensile stresses with adapted, short pitch lengths and pitch directions, especially low-torsion structure.
	Core identification	Cores < 0,5 mm²: Colour code in accordance with DIN 47100 Cores ≥ 0,5 mm²: cores black with white numerals, one core green-yellow
	Inner jacket	PVC mixture adapted to suit the requirements in energy chains®.
	Overall shield	Extremely bending-resistant braiding made of tinned copper wires. Coverage approx. 70% linear, approx. 90% optical.
	Outer jacket	Low-adhesion, oil-resistant mixture on the basis of PVC, adapted to suit the requirements in energy chains® (following DIN VDE 0281 Part 13). Colour: Moss green (similar to RAL 6005)
	CFRIP	Strip cables 50% faster! The tear strip is in the outer jacket. Video ► www.igus.eu/en/CFRIP
	T/R moved	-5 °C to +70 °C following DIN EN 60811, part 1-4 chapter 8.2. +5 °C to +70 °C for use in energy chains® with > 50.000 cycles. Minimum bending radius 6,8 x d with < 10 m travel distance, minimum bending radius 7,5 x d with ≥ 10 m travel distance.
	T/R fixed	-20 °C to +70 °C, minimum bending radius 4 x d
	v max. unsupported/gliding	10 m/s, 5 m/s
	a max.	80 m/s²
	Travel distance	Freely suspended and gliding travel distances up to 100 m, Class 3
	UV-resistant	Medium
	Nominal voltage	300/500 V (following DIN VDE 0245).

 eplan download, configurator ► www.igus.eu/en/CF6

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 5.3.2 (5 high load requirements 3 travel distance up to 100 m 2 oil-resistant)

	Testing voltage	2000 V (following DIN VDE 0281-2).
	Oil	Oil-resistant (following DIN EN 50363-4-1), Class 2.
	Flame-retardant	According to IEC 60332-1-2, CEI 20-35, FT1, VW-1
	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
	UL/CSA	< 0,5 mm²: Style 10492 and 2570, 600 V, 80 °C ≥ 0,5 mm²: Style 11113 and 2570, 600 V, 80 °C
	NFPA	Following NFPA 79-2012 chapter 12.9 (starting from manufacturing date 9/2011)
	CEI	Following CEI 20-35
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)
	Clean room	According to ISO Class 2. Outer jacket material complies with CF5.10.07, tested by IPA according to standard 14644-1.

Typical application area

- for high load requirements
- light oil influence
- preferably indoor applications, but also outdoor ones at temperatures > 5 °C
- especially for freely suspended and gliding travel distances up to 100 m
- Storage and retrieval units for high-bay warehouses, machining units/packages machines, quick handling, indoor cranes



chainflex® CF5 and CF6 control cable (green) as well as CF211 measuring system cable (grey) in a screwing station of a motor factory. e-chain®: System E4/00 with chainfix Clip Strain Relief Devices

... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu




Strip cables 50% faster!




Image exemplary.

Delivery program Part No.	Number of cores and conductor nominal cross section [mm²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF6.02.04	(4 x 0,25)C	7,5	31	72
CF6.02.24 ⁽³⁾	(24 x 0,25)C	14,0	122	265
CF6.03.05	(5 x 0,34)C	8,0	41	106
CF6.05.02	(2 x 0,5)C	7,0	31	65
CF6.05.05	(5 G 0,5)C	8,5	48	114
CF6.05.07	(7 G 0,5)C	10,0	63	142
CF6.05.09	(9 G 0,5)C	11,5	77	180
CF6.05.12	(12 G 0,5)C	13,0	93	206
CF6.05.18	(18 G 0,5)C	15,0	120	276
CF6.05.24 ⁽³⁾	(24 G 0,5)C	17,5	190	405
CF6.07.03	(3 G 0,75)C	8,0	52	110
CF6.07.04	(4 G 0,75)C	8,5	54	120
CF6.07.05	(5 G 0,75)C	9,0	73	150
CF6.07.07	(7 G 0,75)C	10,5	93	190
CF6.07.12	(12 G 0,75)C	14,0	138	264
CF6.07.18	(18 G 0,75)C	17,5	204	410
CF6.07.24 ⁽³⁾	(24 G 0,75)C	19,5	250	466
CF6.10.03	(3 G 1,0)C	8,5	61	103
CF6.10.04	(4 G 1,0)C	9,0	75	115
CF6.10.05	(5 G 1,0)C	9,5	87	170
CF6.10.07	(7 G 1,0)C	12,0	113	217
CF6.10.12	(12 G 1,0)C	15,0	171	313
CF6.10.18	(18 G 1,0)C	19,0	261	470
CF6.10.24 ⁽³⁾	(24 G 1,0)C	21,0	307	588
CF6.15.03	(3 G 1,5)C	9,0	81	155
CF6.15.04	(4 G 1,5)C	10,0	85	170
CF6.15.05	(5 G 1,5)C	10,0	106	190
CF6.15.07	(7 G 1,5)C	12,0	153	270
CF6.15.12	(12 G 1,5)C	17,0	232	411
CF6.15.18	(18 G 1,5)C	21,5	367	637
CF6.15.25	(25 G 1,5)C	23,5	492	819
CF6.15.36	(36 G 1,5)C	30,0	630	1241
CF6.25.04	(4 G 2,5)C	13,0	135	275

The chainflex® types marked with a (3) refer to cables that are based on a bundling of 4 cores each. Due to their excellent electrical properties (star-quad with especially minimum crosstalk), these cables can virtually be used in all cases in which otherwise twisted-pair cables are required.
Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
 G = with green-yellow earth core x = without earth core

 **Order example: CF6.15.12 – in your desired length (0,5 m steps)**
 CF6 chainflex® series .15 Code nominal cross section .12 Number of cores

 Please use www.chainflex.eu/en/CF6 for your online order.

 Delivery time 24h or today.
 Delivery time means time until shipping of goods.

950 types from stock no cutting costs ...
 (for up to 10 cuts of the same type)

 eplan download, configurator ► www.igus.eu/en/CF6




















... no minimum order quantity ...
 igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu



PUR Control cable | CF170.D

- for medium load requirements
- PUR outer jacket
- oil-resistant and coolant-resistant
- PVC-free/halogen-free
- low-temperature-flexible





	Conductor	Fine-wire stranded conductor consisting of bare copper wires (following EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Cores stranded in layers with short pitch length.
	Core identification	Cores black with white numerals, one core green-yellow.
	Outer jacket	Low-adhesion mixture on the basis of PUR, adapted to suit the requirements in energy chains® (following DIN VDE 0282 Part 10). Colour: Window gray (similar to RAL 7040)
	T/R moved	-35 °C to +80 °C, minimum bending radius 7,5 x d with < 10 m travel distance; minimum bending radius 10 x d with ≥ 10 m travel distance
	T/R fixed	-40 °C to +80 °C, minimum bending radius 5 x d
	v max.	3 m/s, 2 m/s
	unsupported/gliding	
	a max.	20 m/s²
	Travel distance	Freely suspended travel distances, Class 1
	UV-resistant	Medium
	Nominal voltage	300/500 V (following DIN VDE 0245).
	Testing voltage	2000 V (following DIN VDE 0281-2).
	Oil	Oil-resistant (following DIN EN 50363-10-2), Class 3.
	Offshore	MUD-resistant following NEK 606 – status 2009.
	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
	Halogen-free	Following EN 50267-2-1.
	CE	Following 2006/95/EG

 eplan download, configurator ► www.igus.eu/en/CF170D

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 4.1.3 (4 medium load requirements 1 freely suspended 3 oil-resistant)

 **DESINA** According to VDW, DESINA standardisation

 **Lead free** Following 2011/55/EU (RoHS-II)

Typical application area

- for medium load requirements
- almost unlimited resistance to oil
- indoor and outdoor applications without direct sun radiation
- especially for freely suspended travel distances, but also for gliding applications up to 20 m
- Machining units/machine tools, low temperature applications




















Delivery program Part No.	Number of cores and conductor nominal cross section [mm²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF170.05.12.D	12 G 0,5	9,0	58	125
CF170.05.18.D	18 G 0,5	11,5	86	180
CF170.05.30.D	30 G 0,5	14,0	144	280
CF170.07.03.D	3 G 0,75	6,5	22	50
CF170.07.05.D	5 G 0,75	7,5	36	70
CF170.07.07.D	7 G 0,75	8,5	50	100
CF170.07.12.D	12 G 0,75	10,0	86	160
CF170.07.18.D	18 G 0,75	12,5	130	230
CF170.07.20.D	20 G 0,75	13,5	144	288
CF170.10.03.D	3 G 1,0	7,0	29	55
CF170.10.04.D	4 G 1,0	7,5	37	61
CF170.10.05.D	5 G 1,0	8,0	48	85
CF170.10.07.D	7 G 1,0	9,5	67	130
CF170.10.12.D	12 G 1,0	10,5	118	170
CF170.10.18.D	18 G 1,0	13,5	173	290
CF170.10.25.D	25 G 1,0	16,0	240	390
CF170.15.03.D	3 G 1,5	7,5	43	72
CF170.15.04.D	4 G 1,5	8,0	58	90
CF170.15.05.D	5 G 1,5	8,5	68	106
CF170.15.07.D ⁽¹⁷⁾	7 G 1,5	10,5	101	180
CF170.15.12.D	12 G 1,5	13,0	173	270
CF170.15.18.D	18 G 1,5	15,0	259	390
CF170.15.25.D	25 G 1,5	19,0	360	540
CF170.25.04.D	4 G 2,5	10,0	96	150
CF170.25.05.D	5 G 2,5	10,5	114	177
CF170.25.07.D ⁽¹⁷⁾	7 G 2,5	13,0	168	280
CF170.40.04.D	4 G 4,0	12,0	154	220
CF170.60.04.D	4 G 6,0	14,0	230	320
CF170.100.04.D	4 G 10,0	18,0	384	530

⁽¹⁷⁾ Using the cables with "7 G 1,5 mm²" and "7 G 2,5 mm²" it is essential: bending radius 17 x d with travel distance ≥ 5 m. When the travel distance is not less than 5 m, a bending radius not less than 17 x d has to be used.
Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

... no minimum order quantity ...
igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu

PUR Control cable | CF180




- for medium load requirements
- PUR outer jacket
- shielded
- oil-resistant and coolant-resistant
- PVC-free/halogen-free
- low-temperature-flexible

	Conductor	Fine-wire stranded conductor consisting of bare copper wires (following EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Cores stranded in layers with short pitch length.
	Core identification	Cores black with white numerals, one core green-yellow.
	Inner jacket	PUR mixture adapted to suit the requirements in energy chains®.
	Overall shield	Bending-resistant braiding made of tinned copper wires. Coverage approx. 55% linear, approx. 80% optical.
	Outer jacket	Low-adhesion mixture on the basis of PUR, adapted to suit the requirements in energy chains® (following DIN VDE 0282 Part 10). Colour: Window gray (similar to RAL 7040)
	T/R moved	-35 °C to +80 °C, minimum bending radius 7,5 x d with < 10 m travel distance; minimum bending radius 15 x d with ≥ 10 m travel distance
	T/R fixed	-40 °C to +80 °C, minimum bending radius 7,5 x d
	v max.	3 m/s, 2 m/s
	unsupported/gliding	
	a max.	20 m/s²
	Travel distance	Freely suspended travel distances, Class 1
	UV-resistant	Medium
	Nominal voltage	300/500 V (following DIN VDE 0245).
	Testing voltage	2000 V (following DIN VDE 0281-2).
	Oil	Oil-resistant (following DIN EN 50363-10-2), Class 3.
	Offshore	MUD-resistant following NEK 606 – status 2009.
	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).

 eplan download, configurator ► www.igus.eu/en/CF180

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 4.1.3 (4 medium load requirements 1 freely suspended 3 oil-resistant)


	Halogen-free	Following EN 50267-2-1.
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)

Typical application area


- for medium load requirements
- almost unlimited resistance to oil
- indoor and outdoor applications without direct sun radiation
- especially for freely suspended travel distances, but also for gliding applications up to 20 m
- Machining units/machine tools, low temperature applications

Delivery program Part No.	Number of cores and conductor nominal cross section [mm²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF180.05.18	(18 G 0,5)C	11,5	121	200
CF180.07.03	(3 G 0,75)C	7,5	40	71
CF180.07.05	(5 G 0,75)C	8,5	61	95
CF180.07.12	(12 G 0,75)C	11,5	133	186
CF180.07.18	(18 G 0,75)C	13,5	176	255
CF180.10.05	(5 G 1,0)C	9,5	75	120
CF180.10.18	(18 G 1,0)C	14,0	238	317
CF180.15.03	(3 G 1,5)C	8,5	67	104
CF180.15.04	(4 G 1,5)C	9,0	85	129
CF180.15.07	(7 G 1,5)C	11,5	146	202
CF180.25.04	(4 G 2,5)C	10,5	130	179
CF180.25.05	(5 G 2,5)C	12,5	165	218
CF180.25.07	(7 G 2,5)C	14,5	225	295

Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

 **Order example: CF180.07.05 – in your desired length (0,5 m steps)**
CF180 chainflex® series .07 Code nominal cross section .05 Number of cores

 Please use www.chainflex.eu/en/CF180 for your online order.

 Delivery time 24h or today.
Delivery time means time until shipping of goods.
















... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu



PUR Control cable | CF77.UL.D












- for high load requirements
- PUR outer jacket
- oil-resistant and coolant-resistant
- flame-retardant
- notch-resistant
- PVC-free/halogen-free

	Conductor	Fine-wire stranded conductor consisting of bare copper wires (following EN 60228)
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Number of cores < 12: cores stranded in a layer with short pitch length. Number of cores ≥ 12: cores combined in bundles and stranded together around a centre for high tensile stresses with adapted, short pitch lengths and pitch directions, especially low-torsion structure.
	Core identification	Cores < 0,5 mm²: Colour code in accordance with DIN 47100 Cores ≥ 0,5 mm²: cores black with white numerals, one core green-yellow CF77.UL.03.04.INI: brown, blue, black, white
	Outer jacket	Low-adhesion, highly abrasion-resistant mixture on the basis of PUR, adapted to suit the requirements in energy chains® (following DIN VDE 0282 Part 10). Colour: Window gray (similar to RAL 7040) CF77.UL.03.04.INI: Colour: Colza yellow (similar to RAL 1021)
	T/R moved	-35 °C to +80 °C, minimum bending radius 6,8 x d with < 10 m travel distance, minimum bending radius 7,5 x d with ≥ 10 m travel distance
	T/R fixed	-40 °C to +80 °C, minimum bending radius 4 x d
	v max.	10 m/s, 5 m/s
	unsupported/gliding	
	a max.	80 m/s ²
	Travel distance	Freely suspended and gliding travel distances up to 100 m, Class 3
	Torsion	± 180°, with 1 m cable length
	UV-resistant	Medium
	Nominal voltage	Number of cores < 12: 300/500 V Number of cores < 12 (0,25-0,34): 300/300 V Number of cores ≥ 12: 300/300 V (following DIN VDE 0245)
	Testing voltage	2000 V (following DIN VDE 0281-2)

 eplan download, configurator ► www.igus.eu/en/CF77

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 5.3.3 (5 high load requirements 3 travel distance up to 100 m 3 oil-resistant)

	Oil	Oil-resistant (following DIN EN 50363-10-2), Class 3.
	Offshore	MUD-resistant following NEK 606 – status 2009.
	Flame-retardant	According to IEC 60332-1-2, CEI 20-35, FT1, VW-1
	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992)
	Halogen-free	Following EN 50267-2-1
	UL/CSA	Style 10493 and 20233, 300 V, 80 °C
	NFPA	Following NFPA 79-2012 chapter 12.9 (starting from manufacturing date 9/2011)
	CEI	Following CEI 20-35
	CE	Following 2006/95/EG
	DESINA	According to VDW, DESINA standardisation
	Lead free	Following 2011/55/EU (RoHS-II)

Typical application area

- for high load requirements
- almost unlimited resistance to oil
- indoor and outdoor applications with average sun radiation
- especially for freely suspended and gliding travel distances up to 100 m
- Machining units/machine tools, storage and retrieval units for high-bay warehouses, packaging industry, quick handling, refrigerating sector



... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu



Image exemplary.

Delivery program Part No.	Number of cores and conductor nominal cross section [mm ²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]	
CF77.UL.02.04.D	4 x 0,25	5,5	10	34	
CF77.UL.03.04.INI	4 x 0,34	6,0	15	38	New*
CF77.UL.05.04.D	4 G 0,5	6,0	19	48	
CF77.UL.05.05.D	5 G 0,5	6,5	24	55	
CF77.UL.05.07.D	7 G 0,5	7,5	37	76	New*
CF77.UL.05.12.D	12 G 0,5	10,0	57	128	
CF77.UL.05.18.D	18 G 0,5	12,0	86	188	
CF77.UL.05.25.D	25 G 0,5	13,5	119	244	
CF77.UL.05.30.D	30 G 0,5	14,5	143	297	
CF77.UL.07.03.D	3 G 0,75	6,0	21	52	
CF77.UL.07.04.D	4 G 0,75	6,5	28	61	
CF77.UL.07.05.D	5 G 0,75	7,0	35	71	
CF77.UL.07.07.D	7 G 0,75	8,5	49	100	
CF77.UL.07.12.D	12 G 0,75	11,5	84	183	
CF77.UL.07.18.D	18 G 0,75	13,5	126	247	
CF77.UL.07.20.D	20 G 0,75	14,0	140	277	
CF77.UL.07.36.D	36 G 0,75	19,0	284	497	
CF77.UL.07.42.D ⁽¹⁾	42 G 0,75	20,5	331	570	New*
CF77.UL.10.02.D	2 x 1,0	6,0	20	52	
CF77.UL.10.03.D	3 G 1,0	6,5	29	61	
CF77.UL.10.04.D	4 G 1,0	7,0	39	75	
CF77.UL.10.05.D	5 G 1,0	7,5	49	91	
CF77.UL.10.07.D	7 G 1,0	8,5	68	112	
CF77.UL.10.12.D	12 G 1,0	11,5	116	222	
CF77.UL.10.18.D	18 G 1,0	14,5	174	321	
CF77.UL.10.25.D	25 G 1,0	17,0	240	406	
CF77.UL.15.03.D	3 G 1,5	7,0	42	81	
CF77.UL.15.04.D	4 G 1,5	7,5	55	99	
CF77.UL.15.05.D	5 G 1,5	8,0	69	117	
CF77.UL.15.07.D ⁽¹⁷⁾	7 G 1,5	10,0	96	164	
CF77.UL.15.12.D	12 G 1,5	14,0	165	290	
CF77.UL.15.18.D	18 G 1,5	17,0	260	397	
CF77.UL.15.25.D	25 G 1,5	19,5	360	555	
CF77.UL.15.36.D ⁽¹⁾	36 G 1,5	23,5	567	837	New*
CF77.UL.15.42.D ⁽¹⁾	42 G 1,5	25,5	662	973	New*

(1) Delivery time upon inquiry.

(17) Using the cables with "7 G 1,5 mm²" and "7 G 2,5 mm²" it is essential: bending radius 17 x d with travel distance ≥ 5 m. When the travel distance is not less than 5 m, a bending radius not less than 17 x d has to be used.

Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.

G = with green-yellow earth core x = without earth core

* New in this catalogue.

Delivery program Part No.	Number of cores and conductor nominal cross section [mm ²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]	
CF77.UL.25.03.D	3 G 2,5	8,5	80	108	New*
CF77.UL.25.04.D	4 G 2,5	9,0	91	145	
CF77.UL.25.05.D	5 G 2,5	10,5	120	179	
CF77.UL.25.07.D ⁽¹⁷⁾	7 G 2,5	12,5	168	253	
CF77.UL.40.04.D ⁽¹⁾	4 G 4,0	11,5	154	242	

(1) Delivery time upon inquiry.

(17) Using the cables with "7 G 1,5 mm²" and "7 G 2,5 mm²" it is essential: bending radius 17 x d with travel distance ≥ 5 m. When the travel distance is not less than 5 m, a bending radius not less than 17 x d has to be used.

Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.

G = with green-yellow earth core x = without earth core

* New in this catalogue.



Order example: CF77.UL.10.03.D – in your desired length (0,5 m steps)
CF77.UL.D chainflex® series .10 Code nominal cross section .03 Number of cores



Please use www.chainflex.eu/en/CF77 for your online order.



Delivery time 24h or today.
Delivery time means time until shipping of goods.



eplan download, configurator ► www.igus.eu/en/CF77

















950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

... no minimum order quantity ...
igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu



PUR Control cable | CF78.UL











- for high load requirements
- PUR outer jacket
- shielded
- oil-resistant and coolant-resistant
- flame-retardant
- notch-resistant
- PVC-free/halogen-free

	Conductor	Fine-wire stranded conductor consisting of bare copper wires (following EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Number of cores < 12: cores stranded in a layer with short pitch length. Number of cores ≥ 12: cores combined in bundles and stranded together around a centre for high tensile stresses with adapted, short pitch lengths and pitch directions, especially low-torsion structure.
	Core identification	Cores < 0,5 mm²: Colour code in accordance with DIN 47100 Cores ≥ 0,5 mm²: cores black with white numerals, one core green-yellow
	Inner jacket	PUR mixture adapted to suit the requirements in energy chains®.
	Overall shield	Bending-resistant braiding made of tinned copper wires. Coverage approx. 55% linear, approx. 80% optical.
	Outer jacket	Low-adhesion, highly abrasion-resistant mixture on the basis of PUR, adapted to suit the requirements in energy chains® (following DIN VDE 0282 Part 10). Colour: Window gray (similar to RAL 7040)
	T/R moved	-35 °C to +80 °C, minimum bending radius 6,8 x d with < 10 m travel distance, minimum bending radius 7,5 x d with ≥ 10 m travel distance
	T/R fixed	-40 °C to +80 °C, minimum bending radius 4 x d
	v max.	10 m/s, 5 m/s
	unsupported/gliding	
	a max.	80 m/s²
	Travel distance	Freely suspended and gliding travel distances up to 100 m, Class 3
	UV-resistant	Medium
	Nominal voltage	Number of cores < 12: 300/500 V Number of cores < 12 (0,25-0,34): 300/300 V Number of cores ≥ 12: 300/300 V (following DIN VDE 0245)
	Testing voltage	2000 V (following DIN VDE 0281-2).

 eplan download, configurator ► www.igus.eu/en/CF78

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 5.3.3 (5 high load requirements 3 travel distance up to 100 m 3 oil-resistant)

	Oil	Oil-resistant (following DIN EN 50363-10-2), Class 3.
	Offshore	MUD-resistant following NEK 606 – status 2009.
	Flame-retardant	According to IEC 60332-1-2, CEI 20-35, FT1, VW-1
	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
	Halogen-free	Following EN 50267-2-1
	UL/CSA	Style 10493 and 20233, 300 V, 80 °C
	NFPA	Following NFPA 79-2012 chapter 12.9 (starting from manufacturing date 9/2011)
	CEI	Following CEI 20-35
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)

Typical application area

- for high load requirements
- almost unlimited resistance to oil
- indoor and outdoor applications with average sun radiation
- especially for freely suspended and gliding travel distances up to 100 m
- Machining units/machine tools, storage and retrieval units for high-bay warehouses, packaging industry, quick handling, refrigerating sector



... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu



Image exemplary.


Delivery program Part No.	Number of cores and conductor nominal cross section [mm²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]	
CF78.UL.05.04	(4 G 0,5)C	8,0	32	77	
CF78.UL.05.05	(5 G 0,5)C	8,5	38	88	
CF78.UL.05.07	(7 G 0,5)C	9,5	56	117	
CF78.UL.05.09	(9 G 0,5)C	10,5	68	144	
CF78.UL.05.12	(12 G 0,5)C	12,5	88	198	
CF78.UL.05.18	(18 G 0,5)C	14,0	125	268	
CF78.UL.05.25	(25 G 0,5)C	16,0	163	349	
CF78.UL.07.03	(3 G 0,75)C	8,0	35	82	
CF78.UL.07.04	(4 G 0,75)C	8,5	47	94	
CF78.UL.07.05	(5 G 0,75)C	9,5	57	119	
CF78.UL.07.07	(7 G 0,75)C	10,5	77	153	
CF78.UL.07.12	(12 G 0,75)C	13,5	125	252	
CF78.UL.07.18 ⁽¹⁾	(18 G 0,75)C	15,5	175	337	
CF78.UL.07.36	(36 G 0,75)C	21,5	397	691	New*
CF78.UL.07.42 ⁽¹⁾	(42 G 0,75)C	24,0	444	755	New*
CF78.UL.10.03	(3 G 1,0)C	8,5	48	101	
CF78.UL.10.04	(4 G 1,0)C	9,0	58	116	
CF78.UL.10.05	(5 G 1,0)C	9,5	71	137	
CF78.UL.10.07	(7 G 1,0)C	11,0	94	179	
CF78.UL.10.12	(12 G 1,0)C	14,5	155	299	
CF78.UL.10.18 ⁽¹⁾	(18 G 1,0)C	17,0	220	412	
CF78.UL.10.25	(25 G 1,0)C	19,5	315	535	
CF78.UL.15.03	(3 G 1,5)C	9,5	65	126	
CF78.UL.15.04	(4 G 1,5)C	10,0	80	145	
CF78.UL.15.05	(5 G 1,5)C	10,5	98	172	
CF78.UL.15.07	(7 G 1,5)C	12,5	131	225	
CF78.UL.15.12	(12 G 1,5)C	15,5	215	370	
CF78.UL.15.18	(18 G 1,5)C	19,0	307	511	New*
CF78.UL.15.25	(25 G 1,5)C	22,5	495	710	New*
CF78.UL.15.36 ⁽¹⁾	(36 G 1,5)C	26,5	683	1082	New*
CF78.UL.15.42 ⁽¹⁾	(42 G 1,5)C	29,5	803	1279	New*
CF78.UL.25.04	(4 G 2,5)C	11,5	123	205	
CF78.UL.25.05 ⁽¹⁾	(5 G 2,5)C	12,5	150	245	
CF78.UL.25.07	(7 G 2,5)C	14,5	207	330	
CF78.UL.40.04 ⁽¹⁾	(4 G 4,0)C	15,0	189	322	

⁽¹⁾ Delivery time upon inquiry.


Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.

G = with green-yellow earth core x = without earth core

* New in this catalogue.

 **Order example: CF78.UL.15.18 – in your desired length (0,5 m steps) CF78.UL chainflex® series .15 Code nominal cross section .18 Number of cores**

 Please use www.chainflex.eu/en/CF78 for your online order.

 Delivery time 24h or today.
Delivery time means time until shipping of goods.

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

















 eplan download, configurator ► www.igus.eu/en/CF78

... no minimum order quantity ...
igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu



PUR Control cable | CF2









- for maximum load requirements
- PUR outer jacket
- shielded
- oil-resistant and coolant-resistant
- flame-retardant
- notch-resistant
- hydrolysis-resistant and microbe-resistant

	Conductor	Fine-wire stranded conductor in especially bending-resistant version consisting of bare copper wires (following EN 60228).
	Core insulation	Cores < 0,5 mm²: Mechanically high-quality PP mixture. Cores ≥ 0,5 mm²: Mechanically high-quality PVC mixture (following DIN VDE 0207 Part 4).
	Core stranding	Number of cores < 12: cores stranded in a layer with short pitch length. Number of cores ≥ 12: cores combined in bundles and stranded together around a centre for high tensile stresses with adapted, short pitch lengths and pitch directions, especially low-torsion structure.
	Core identification	Cores < 0,5 mm²: Colour code in accordance with DIN 47100 Cores ≥ 0,5 mm²: cores black with white numerals, one core green-yellow
	Inner jacket	PVC mixture adapted to suit the requirements in energy chains®.
	Overall shield	Extremely bending-resistant braiding made of tinned copper wires. Coverage approx. 70% linear, approx. 90% optical.
	Outer jacket	Low-adhesion, highly abrasion-resistant mixture on the basis of PUR, adapted to suit the requirements in energy chains® (following DIN VDE 0282 Part 10). Colour: Anthracite gray (similar to RAL 7016)
	T/R moved	-20 °C to +80 °C, minimum bending radius 5 x d
	T/R fixed	-40 °C to +80 °C, minimum bending radius 4 x d
	v max. unsupported/gliding	10 m/s, 5 m/s
	a max.	80 m/s²
	Travel distance	Freely suspended and gliding travel distances up to 100 m, Class 3
	UV-resistant	High
	Nominal voltage	300/500 V (following DIN VDE 0245).
	Testing voltage	2000 V (following DIN VDE 0281-2).
	Oil	Oil-resistant (following DIN EN 50363-10-2), Class 3.

 eplan download, configurator ► www.igus.eu/en/CF2

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 6.3.3 (6 maximum load requirements 3 travel distance up to 100 m 3 oil-resistant)

	Offshore	MUD-resistant following NEK 606 – status 2009.
	Flame-retardant	According to IEC 60332-1-2, CEI 20-35, FT1, VW-1
	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
	UL/CSA	< 0,5 mm²: Style 10493 and 20317, 300 V, 80 °C ≥ 0,5 mm²: Style 1007 and 20317, 300 V, 80 °C
	NFPA	Following NFPA 79-2012 chapter 12.9 (starting from manufacturing date 9/2011)
	CEI	Following CEI 20-35
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)

Typical application area

- for maximum load requirements
- almost unlimited resistance to oil
- Indoor and outdoor applications
- especially for freely suspended and gliding travel distances up to 100 m
- Storage and retrieval units for high-bay warehouses, machining units/packages machines, quick handling, indoor cranes, refrigerating sector



chainflex® cables are resistant to oil and coolants. e-chain®: System E4/00

... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu

IGUS® CHAINFLEX® CF2

Image exemplary.


Delivery program Part No.	Number of cores and conductor nominal cross section [mm²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF2.01.04	(4 x 0,14)C	6,0	17	40
CF2.01.08	(8 x 0,14)C	8,0	29	65
CF2.01.12	(12 x 0,14)C	9,0	49	101
CF2.01.18	(18 x 0,14)C	10,0	53	125
CF2.01.24 ⁽³⁾	(24 x 0,14)C	11,5	65	135
CF2.01.36	(36 x 0,14)C	14,0	88	200
CF2.01.48	(48 x 0,14)C	16,0	135	310
CF2.02.04	(4 x 0,25)C	7,0	24	53
CF2.02.08	(8 x 0,25)C	8,0	41	83
CF2.02.18	(18 x 0,25)C	13,0	96	190
CF2.02.24 ⁽³⁾	(24 x 0,25)C	14,0	120	220
CF2.02.48	(48 x 0,25)C	18,0	230	450
CF2.05.12 ⁽¹⁾	(12 G 0,5)C	18,0	145	390
CF2.05.18 ⁽¹⁾	(18 G 0,5)C	22,0	192	520
CF2.07.04 ⁽¹⁾	(4 G 0,75)C	10,0	57	160
CF2.07.12 ⁽¹⁾	(12 G 0,75)C	19,0	183	440
CF2.07.24 ^{(3)/(1)}	(24 G 0,75)C	25,0	302	720
CF2.10.05 ⁽¹⁾	(5 G 1,0)C	12,0	91	200
CF2.10.24 ⁽¹⁾	(24 G 1,0)C	26,0	363	780
CF2.15.03 ⁽¹⁾	(3 G 1,5)C	11,0	85	190

(1) Delivery time upon inquiry. Deliverable alternative: CF10, CF10.UL, CF78.UL


The chainflex® types marked with a (3) refer to cables that are based on a bundling of 4 cores each. Due to their excellent electrical properties (star-quad with especially minimum crosstalk), these cables can virtually be used in all cases in which otherwise twisted-pair cables are required.

Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.

G = with green-yellow earth core x = without earth core

 **Order example: CF2.02.18 – in your desired length (0,5 m steps)**
CF2 chainflex® series .02 Code nominal cross section .18 Number of cores

 Please use www.chainflex.eu/en/CF2 for your online order.

 Delivery time 24h or today.
Delivery time means time until shipping of goods.





 eplan download, configurator ► www.igus.eu/en/CF2









950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

... no minimum order quantity ...
igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu

TPE Control cable | CF9

- for maximum load requirements
- TPE outer jacket
- oil-resistant
- biooil-resistant
- PVC-free/halogen-free
- low-temperature-flexible
- hydrolysis-resistant and microbe-resistant









	Conductor	Fine-wire stranded conductor in especially bending-resistant version consisting of bare copper wires (following EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Number of cores < 12: cores stranded in a layer with short pitch length. Number of cores ≥ 12: cores combined in bundles and stranded together around a centre for high tensile stresses with adapted, short pitch lengths and pitch directions, especially low-torsion structure.
	Core identification	Cores < 0,75 mm²: Colour code in accordance with DIN 47100 Cores ≥ 0,75 mm²: cores black with white numerals, one core green-yellow CF9.02.03.INI: brown, blue, black CF9.03.04.INI: brown, blue, black, white CF9.03.05.INI: brown, blue, black, white, green-yellow CF9.03.16.07.03.INI: (0,75mm²): blue, green-yellow, brown (0,34mm²): violet, red, gray, red-blue, green, gray-pink, white-green, white-yellow, white-gray, black, yellow-brown, brown-green, white, yellow, pink, gray-brown

	Outer jacket	Low-adhesion mixture on the basis of TPE, especially abrasion-resistant and highly flexible, adapted to suit the requirements in energy chains®. Colour: Steel blue (similar to RAL 5011)
	T/R moved	-35 °C to +100 °C, minimum bending radius 5 x d
	T/R fixed	-40 °C to +100 °C, minimum bending radius 3 x d
	v max. unsupported/gliding	10 m/s, 6 m/s
	a max.	100 m/s²
	Travel distance	Freely suspended and gliding travel distances up to 400 m and more, Class 4
	Torsion	± 90°, with 1 m cable length
	UV-resistant	High

 eplan download, configurator ► www.igus.eu/en/CF9

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 7.4.4 (7 maximum load requirements 4 travel distance up to 400 m and more 4 oil-resistant)

	Nominal voltage	300/500 V (following DIN VDE 0245).
	Testing voltage	2000 V (following DIN VDE 0281-2).
	Oil	Oil-resistant (following DIN EN 60811-2-1), biooil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4.
	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
	Halogen-free	Following EN 50267-2-1.
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)
	Clean room	According to ISO Class 1, material/cable tested by IPA according to ISO standard 14644-1

Typical application area

- for maximum load requirements
- almost unlimited resistance to oil, also with bio-oils
- Indoor and outdoor applications, UV-resistant
- especially for freely suspended and gliding travel distances up to 400 m and more
- Storage and retrieval units for high-bay warehouses, machining units/machine tools, quick handling, clean room, semiconductor insertion, ship to shore, outdoor cranes, low-temperature applications



chainflex® CF9 for outdoor crane systems. e-chain®: Series E4/00

Test data ► Page 36 or www.igus.eu/en/test13

... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu



Image exemplary.

Delivery program Part No.	Number of cores and conductor nominal cross section [mm ²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF9.01.03 ⁽¹⁾	3 x 0,14	4,0	5	15
CF9.02.02	2 x 0,25	4,5	5	18
CF9.02.03.INI	3 x 0,25	4,5	8	20
CF9.02.06	6 x 0,25	5,5	15	35
CF9.02.07	7 x 0,25	6,0	17	42
CF9.02.08	8 x 0,25	6,5	20	46
CF9.02.12	12 x 0,25	8,0	29	70
CF9.02.20	20 x 0,25	9,5	53	104
CF9.03.04.INI	4 x 0,34	5,0	13	31
CF9.03.05.INI	5 x 0,34	5,5	17	37
CF9.03.06	6 x 0,34	6,0	20	43
CF9.03.08	8 x 0,34	7,0	26	55
CF9.03.16.07.03.INI	4 x 4 x 0,34+3 x 0,75	11,0	74	159
CF9.05.02	2 x 0,5	5,0	10	31
CF9.05.03	3 x 0,5	5,5	15	32
CF9.05.04	4 x 0,5	5,5	20	36
CF9.05.05	5 x 0,5	6,0	24	46
CF9.05.07	7 x 0,5	7,0	34	78
CF9.05.12	12 x 0,5	9,5	58	105
CF9.05.18	18 x 0,5	12,5	86	165
CF9.05.25	25 x 0,5	13,5	120	201
CF9.05.36	36 x 0,5	17,5	173	368
CF9.07.05	5 G 0,75	6,5	36	58
CF9.07.07	7 G 0,75	8,0	50	76
CF9.07.12	12 G 0,75	11,0	86	142
CF9.07.20	20 G 0,75	13,5	144	231
CF9.07.25	25 G 0,75	14,5	180	320
CF9.10.03	3 G 1,0	6,0	29	49
CF9.10.04	4 G 1,0	6,5	38	56
CF9.10.05	5 G 1,0	7,0	48	70
CF9.10.12	12 G 1,0	11,5	115	181
CF9.10.18	18 G 1,0	14,0	173	267
CF9.10.25	25 G 1,0	17,0	241	329


New*

Delivery program Part No.	Number of cores and conductor nominal cross section [mm ²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF9.15.02	2 x 1,5	6,5	29	54
CF9.15.04	4 G 1,5	7,5	58	86
CF9.15.05	5 G 1,5	8,0	72	110
CF9.15.07 ⁽¹⁷⁾	7 G 1,5	9,5	101	140
CF9.15.12	12 G 1,5	14,0	173	265
CF9.15.18	18 G 1,5	17,0	260	400
CF9.15.25	25 G 1,5	20,0	360	602
CF9.15.36	36 G 1,5	23,0	519	840
CF9.25.04	4 G 2,5	9,0	96	128
CF9.25.05	5 G 2,5	10,0	120	174
CF9.25.07 ⁽¹⁷⁾	7 G 2,5	12,0	168	301
CF9.25.12	12 G 2,5	17,0	288	468
CF9.25.16	16 G 2,5	21,0	384	600
CF9.25.18 ⁽⁷⁾	18 G 2,5	22,5	432	827
CF9.25.25	25 G 2,5	24,5	600	990
CF9.40.04	4 G 4,0	10,0	154	195
CF9.60.04	4 G 6,0	12,5	230	310
CF9.60.05	5 G 6,0	14,0	288	400
CF9.100.04 ⁽⁶⁾	4 G 10,0	16,5	384	515
CF9.160.04 ⁽⁶⁾	4 G 16,0	20,0	614	780
CF9.350.04 ⁽⁶⁾	4 G 35,0	26,0	1344	1700


(7) Nominal voltage 600/1000 V (6) Nominal voltage 450/750 V

(17) Using the cables with "7 G 1,5 mm²" and "7 G 2,5 mm²" it is essential: bending radius 17 x d with travel distance ≥ 5 m. When the travel distance is not less than 5 m, a bending radius not less than 17 x d has to be used.

Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

 Order example: CF9.25.04 – in your desired length (0,5 m steps)
CF9 chainflex® series .25 Code nominal cross section .04 Number of cores

 Please use www.chainflex.eu/en/CF9 for your online order.

 Delivery time 24h or today.
Delivery time means time until shipping of goods.

(1) Delivery time upon inquiry.

Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.

G = with green-yellow earth core x = without earth core

* New in this catalogue.

 eplan download, configurator ► www.igus.eu/en/CF9
















950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu

TPE Control cable | CF10







- for maximum load requirements
- TPE outer jacket
- shielded
- oil-resistant
- biooil-resistant
- PVC-free/halogen-free
- low-temperature-flexible
- hydrolysis-resistant and microbe-resistant

	Conductor	Fine-wire stranded conductor in especially bending-resistant version consisting of bare copper wires (following EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Number of cores < 12: cores stranded in a layer with short pitch length. Number of cores ≥ 12: cores combined in bundles and stranded together around a centre for high tensile stresses with adapted, short pitch lengths and pitch directions, especially low-torsion structure.
	Core identification	Cores < 0,75 mm²: Colour code in accordance with DIN 47100 Cores ≥ 0,75 mm²: cores black with white numerals, one core green-yellow CF10.03.05.INI: brown, blue, black, white, green-yellow TPE mixture adapted to suit the requirements in energy chains®.
	Inner jacket	
	Overall shield	Extremely bending-resistant braiding made of tinned copper wires. Coverage approx. 70% linear, approx. 90% optical.
	Outer jacket	Low-adhesion mixture on the basis of TPE, especially abrasion-resistant and highly flexible, adapted to suit the requirements in energy chains®. Colour: Steel blue (similar to RAL 5011)
	T/R moved	-35 °C to +100 °C, minimum bending radius 5 x d
	T/R fixed	-40 °C to +100 °C, minimum bending radius 3 x d
	v max. unsupported/gliding	10 m/s, 6 m/s
	a max.	100 m/s²
	Travel distance	Freely suspended and gliding travel distances up to 400 m and more, Class 4
	UV-resistant	High
	Nominal voltage	300/500 V (following DIN VDE 0245).
	Testing voltage	2000 V (following DIN VDE 0281-2).

 eplan download, configurator ► www.igus.eu/en/CF10


950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 7.4.4 (7 maximum load requirements 4 travel distance up to 400 m and more 4 oil-resistant)

	Oil	Oil-resistant (following DIN EN 60811-2-1), biooil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4.
	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
	Halogen-free	Following EN 50267-2-1.
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)
	Clean room	According to ISO Class 1. Outer jacket material complies with CF9.15.07, tested by IPA according to standard 14644-1

Typical application area

- for maximum load requirements
- almost unlimited resistance to oil, also with bio-oils
- Indoor and outdoor applications, UV-resistant
- especially for freely suspended and gliding travel distances up to 400 m and more
- Storage and retrieval units for high-bay warehouses, machining units/machine tools, quick handling, clean room, semiconductor insertion, ship to shore, outdoor cranes, low-temperature applications

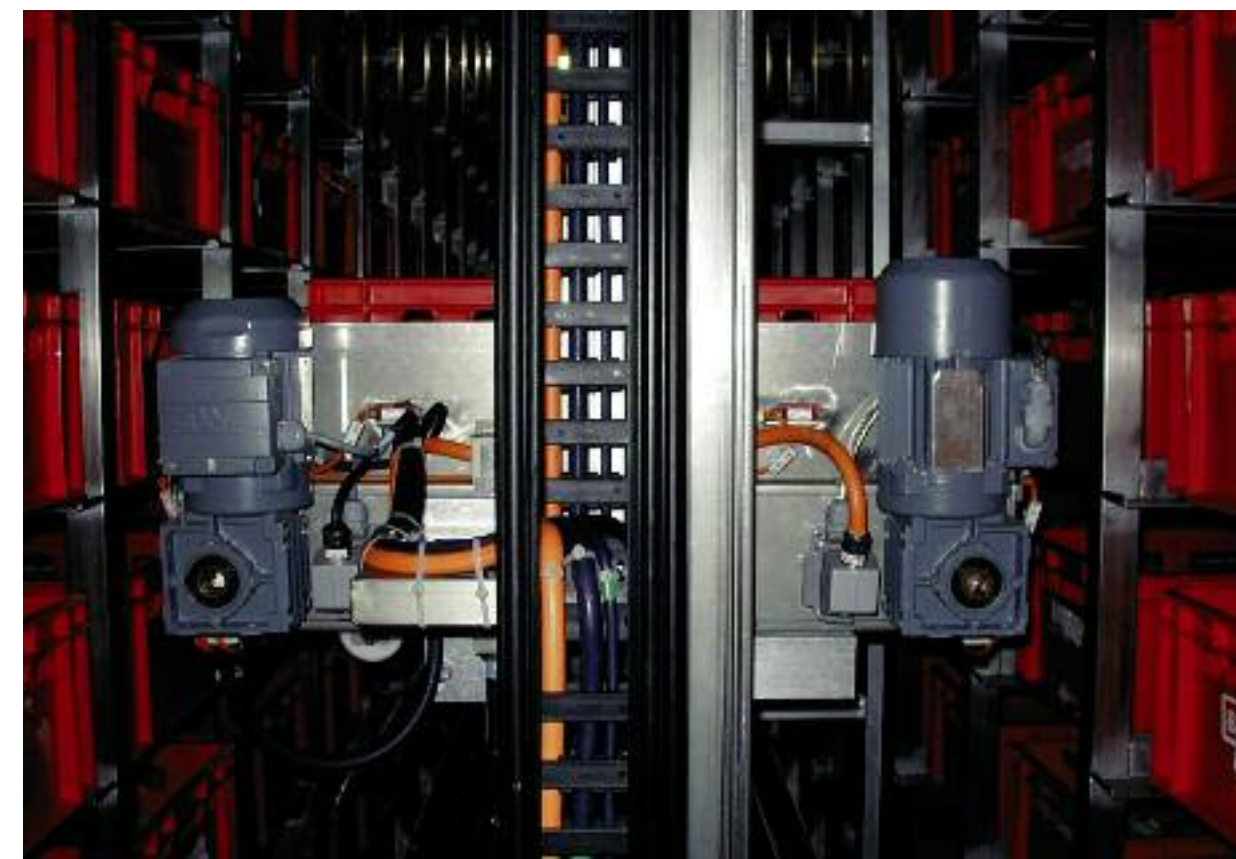

Control cable chainflex® CF10 in storage and retrieval units for high-bay warehouses. e-chain®: System E2 medium

... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu






Image exemplary.

Delivery program Part No.	Number of cores and conductor nominal cross section [mm²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF10.01.12	(12 x 0,14)C	7,5	36	80
CF10.01.18	(18 x 0,14)C	10,0	67	110
CF10.02.04	(4 x 0,25)C	6,5	25	52
CF10.02.08	(8 x 0,25)C	7,5	40	75
CF10.02.12	(12 x 0,25)C	9,5	64	118
CF10.02.24	(24 x 0,25)C	13,0	109	212
CF10.03.05.INI	(5 x 0,34)C	7,0	32	62
CF10.05.04	(4 x 0,5)C	7,0	38	68
CF10.05.05	(5 x 0,5)C	7,5	41	74
CF10.05.07	(7 x 0,5)C	8,5	54	96
CF10.05.12	(12 x 0,5)C	11,5	102	192
CF10.05.18	(18 x 0,5)C	13,5	143	270
CF10.05.25	(25 x 0,5)C	14,5	167	280
CF10.07.04	(4 G 0,75)C	7,5	47	86
CF10.07.05	(5 G 0,75)C	7,5	57	95
CF10.07.07	(7 G 0,75)C	9,0	85	137
CF10.07.12	(12 G 0,75)C	12,5	138	244
CF10.07.20	(20 G 0,75)C	15,0	205	346
CF10.07.24	(24 G 0,75)C	16,5	239	419
CF10.10.02	(2 x 1,0)C	7,0	38	70
CF10.10.03	(3 G 1,0)C	7,5	47	84
CF10.10.04	(4 G 1,0)C	8,0	59	100
CF10.10.05	(5 G 1,0)C	8,5	71	101
CF10.10.07	(7 G 1,0)C	10,0	105	166
CF10.10.12	(12 G 1,0)C	13,5	169	293
CF10.10.18	(18 G 1,0)C	16,5	240	407
CF10.10.24	(24 G 1,0)C	18,0	305	506
CF10.15.04	(4 G 1,5)C	9,0	96	144
CF10.15.05	(5 G 1,5)C	9,5	108	163
CF10.15.07	(7 G 1,5)C	11,5	155	225
CF10.15.12	(12 G 1,5)C	15,5	235	387
CF10.15.18	(18 G 1,5)C	20,0	361	585


Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

Delivery program Part No.	Number of cores and conductor nominal cross section [mm²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF10.25.04	(4 G 2,5)C	11,0	126	180
CF10.25.07	(7 G 2,5)C	13,5	221	331
CF10.25.12	(12 G 2,5)C	19,0	373	624
CF10.40.04	(4 G 4,0)C	11,5	200	290
CF10.40.05	(5 G 4,0)C	13,5	246	353

Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

 **Order example: CF10.10.12 – in your desired length (0,5 m steps)**
CF10 chainflex® series .10 Code nominal cross section .12 Number of cores

 Please use www.chainflex.eu/en/CF10 for your online order.

 Delivery time 24h or today.
Delivery time means time until shipping of goods.
















 eplan download, configurator ► www.igus.eu/en/CF10

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

... no minimum order quantity ...
igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu

TPE Control cable | CF9.UL










- for maximum load requirements
- TPE outer jacket
- oil-resistant
- biooil-resistant
- flame-retardant
- PVC-free
- low-temperature-flexible
- hydrolysis-resistant and microbe-resistant

	Conductor	Fine-wire stranded conductor in especially bending-resistant version consisting of bare copper wires (following EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Number of cores < 12: cores stranded in a layer with short pitch length. Number of cores ≥ 12: cores combined in bundles and stranded together around a centre for high tensile stresses with adapted, short pitch lengths and pitch directions, especially low-torsion structure.
	Core identification	Cores < 0,75 mm²: Colour code in accordance with DIN 47100 Cores ≥ 0,75 mm²: cores black with white numerals, one core green-yellow CF9.UL.02.03.INI: brown, blue, black CF9.UL.03.04.INI: brown, blue, black, white CF9.UL.03.05.INI: brown, blue, black, white, green-yellow
	Outer jacket	Low-adhesion mixture on the basis of TPE, especially abrasion-resistant and highly flexible, adapted to suit the requirements in energy chains®. Colour: Steel blue (similar to RAL 5011)
	T/R moved	-35 °C to +100 °C, minimum bending radius 5 x d
	T/R fixed	-40 °C to +100 °C, minimum bending radius 3 x d
	v max.	10 m/s, 6 m/s
	unsupported/gliding	
	a max.	100 m/s²
	Travel distance	Freely suspended and gliding travel distances up to 400 m and more, Class 4
	Torsion	± 90°, with 1 m cable length
	UV-resistant	High
	Nominal voltage	300/500 V (following DIN VDE 0245).
	Testing voltage	2000 V (following DIN VDE 0281-2).

 eplan download, configurator ► www.igus.eu/en/CF9UL

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 6.4.4 (6 maximum load requirements 4 travel distance up to 400 m and more 4 oil-resistant)

	Oil	Oil-resistant (following DIN EN 60811-2-1), biooil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4.
	Flame-retardant	According to IEC 60332-1-2, CEI 20-35, FT1, VW-1
	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
	UL/CSA	< 0,5 mm²: Style 10479 and 21529, 300 V, 90 °C ≥ 0,5 mm²: Style 10258 and 21530, 600 V, 90 °C
	NFPA	Following NFPA 79-2012 chapter 12.9 (starting from manufacturing date 9/2011)
	CEI	Following CEI 20-35
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)
	Clean room	According to ISO Class 1. Outer jacket material complies with CF34.UL.25.04.D, tested by IPA according to standard 14644-1

Typical application area

- for maximum load requirements
- almost unlimited resistance to oil, also with bio-oils
- Indoor and outdoor applications, UV-resistant
- especially for freely suspended and gliding travel distances up to 400 m and more
- Storage and retrieval units for high-bay warehouses, machining units/machine tools, quick handling, clean room, semiconductor insertion, ship to shore, outdoor cranes, low-temperature applications



igus® chainflex® cables in a rafting channel application.

... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu






Image exemplary.

Delivery program Part No.	Number of cores and conductor nominal cross section [mm ²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF9.UL.02.02	2 x 0,25	5,0	5	28
CF9.UL.02.03.INI	3 x 0,25	5,5	8	32
CF9.UL.02.04	4 x 0,25	5,5	10	38
CF9.UL.02.06	6 x 0,25	6,0	15	50
CF9.UL.02.07 ⁽¹⁾	7 x 0,25	6,5	17	57
CF9.UL.02.08	8 x 0,25	7,0	20	63
CF9.UL.02.12	12 x 0,25	8,5	29	95
CF9.UL.03.04.INI	4 x 0,34	6,0	13	43
CF9.UL.03.05.INI ⁽¹⁾	5 x 0,34	6,0	16	51
CF9.UL.03.06	6 x 0,34	6,5	20	58
CF9.UL.03.08 ⁽¹⁾	8 x 0,34	7,5	26	76
CF9.UL.05.02	2 x 0,5	6,0	10	44
CF9.UL.05.03 ⁽¹⁾	3 x 0,5	6,5	15	52
CF9.UL.05.04	4 x 0,5	7,0	20	62
CF9.UL.05.05 ⁽¹⁾	5 x 0,5	7,0	24	72
CF9.UL.05.07	7 x 0,5	8,5	34	97
CF9.UL.05.12	12 x 0,5	11,0	58	196
CF9.UL.05.18	18 x 0,5	13,5	87	242
CF9.UL.05.25 ⁽¹⁾	25 x 0,5	14,5	120	305
CF9.UL.05.36 ⁽¹⁾	36 x 0,5	18,5	173	456
CF9.UL.07.05	5 G 0,75	8,0	36	94
CF9.UL.07.07	7 G 0,75	9,5	51	128
CF9.UL.07.12	12 G 0,75	12,5	87	240
CF9.UL.07.20 ⁽¹⁾	20 G 0,75	15,5	144	342
CF9.UL.07.25	25 G 0,75	16,5	180	412
CF9.UL.10.03	3 G 1,0	7,5	29	78
CF9.UL.10.04	4 G 1,0	8,0	39	98
CF9.UL.10.05 ⁽¹⁾	5 G 1,0	8,5	48	112
CF9.UL.10.12	12 G 1,0	13,5	116	287
CF9.UL.10.18	18 G 1,0	16,5	173	394
CF9.UL.10.25	25 G 1,0	18,5	240	520


(1) Delivery time upon inquiry.
Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
 G = with green-yellow earth core x = without earth core

Delivery program Part No.	Number of cores and conductor nominal cross section [mm ²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF9.UL.15.04	4 G 1,5	9,0	58	127
CF9.UL.15.05	5 G 1,5	9,5	72	152
CF9.UL.15.07 ⁽¹⁷⁾	7 G 1,5	11,0	101	198
CF9.UL.15.12	12 G 1,5	15,5	173	385
CF9.UL.15.18	18 G 1,5	19,0	260	535
CF9.UL.15.25	25 G 1,5	22,0	360	685
CF9.UL.25.04	4 G 2,5	10,5	96	189
CF9.UL.25.05	5 G 2,5	11,0	120	220
CF9.UL.25.07 ⁽¹⁷⁾	7 G 2,5	13,5	168	288
CF9.UL.25.12	12 G 2,5	19,0	288	613
CF9.UL.25.16 ⁽¹⁾	16 G 2,5	21,5	384	805
CF9.UL.25.18	18 G 2,5	23,5	432	852
CF9.UL.25.25	25 G 2,5	26,5	600	1163
CF9.UL.40.04	4 G 4,0	12,0	154	278
CF9.UL.60.04	4 G 6,0	13,5	231	382

(1) Delivery time upon inquiry.
 (17) Using the cables with "7 G 1,5 mm²" and "7 G 2,5 mm²" it is essential: bending radius 17 x d with travel distance ≥ 5 m.
 When the travel distance is not less than 5 m, a bending radius not less than 17 x d has to be used.
Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
 G = with green-yellow earth core x = without earth core

 **Order example: CF9.UL.02.12 – in your desired length (0,5 m steps)**
 CF9.UL chainflex® series .02 Code nominal cross section .12 Number of cores

 Please use www.chainflex.eu/en/CF9UL for your online order.

 Delivery time 24h or today.
 Delivery time means time until shipping of goods.



















 eplan download, configurator ► www.igus.eu/en/CF9UL

950 types from stock no cutting costs ...
 (for up to 10 cuts of the same type)

... no minimum order quantity ...
 igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu

TPE Control cable | CF10.UL








- for maximum load requirements
- TPE outer jacket
- shielded
- oil-resistant, biooil-resistant
- flame-retardant
- PVC-free
- low-temperature-flexible
- hydrolysis-resistant and microbe-resistant

	Conductor	Fine-wire stranded conductor in especially bending-resistant version consisting of bare copper wires (following EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Number of cores < 12: cores stranded in a layer with short pitch length. Number of cores ≥ 12: cores combined in bundles and stranded together around a centre for high tensile stresses with adapted, short pitch lengths and pitch directions, especially low-torsion structure.
	Core identification	Cores < 0,75 mm²: Colour code in accordance with DIN 47100 Cores ≥ 0,75 mm²: cores black with white numerals, one core green-yellow
	Inner jacket	TPE mixture adapted to suit the requirements in energy chains®.
	Overall shield	Extremely bending-resistant braiding made of tinned copper wires. Coverage approx. 70% linear, approx. 90% optical.
	Outer jacket	Low-adhesion mixture on the basis of TPE, especially abrasion-resistant and highly flexible, adapted to suit the requirements in energy chains®. Colour: Steel blue (similar to RAL 5011)
	T/R moved	-35 °C to +100 °C, minimum bending radius 5 x d
	T/R fixed	-40 °C to +100 °C, minimum bending radius 3 x d
	v max.	10 m/s, 6 m/s
	unsupported/gliding	
	a max.	100 m/s²
	Travel distance	Freely suspended and gliding travel distances up to 400 m and more, Class 4
	UV-resistant	High
	Nominal voltage	300/500 V (following DIN VDE 0245).
	Testing voltage	2000 V (following DIN VDE 0281-2).
	Oil	Oil-resistant (following DIN EN 60811-2-1), biooil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4.
	Flame-retardant	According to IEC 60332-1-2, CEI 20-35, FT1, VW-1

 eplan download, configurator ► www.igus.eu/en/CF10UL


950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 6.4.4 (6 maximum load requirements 4 travel distance up to 400 m and more 4 oil-resistant)

	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
	UL/CSA	< 0,5 mm²: Style 10479 and 21529, 300 V, 90 °C ≥ 0,5 mm²: Style 10258 and 21530, 600 V, 90 °C
	NFPA	Following NFPA 79-2012 chapter 12.9 (starting from manufacturing date 9/2011)
	CEI	Following CEI 20-35
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)
	Clean room	According to ISO Class 1. Outer jacket material complies with CF34.UL.25.04.D, tested by IPA according to standard 14644-1

Typical application area

- for maximum load requirements
- almost unlimited resistance to oil, also with bio-oils
- Indoor and outdoor applications, UV-resistant
- especially for freely suspended and gliding travel distances up to 400 m and more
- Storage and retrieval units for high-bay warehouses, machining units/machine tools, quick handling, clean room, semiconductor insertion, ship to shore, outdoor cranes, low-temperature applications

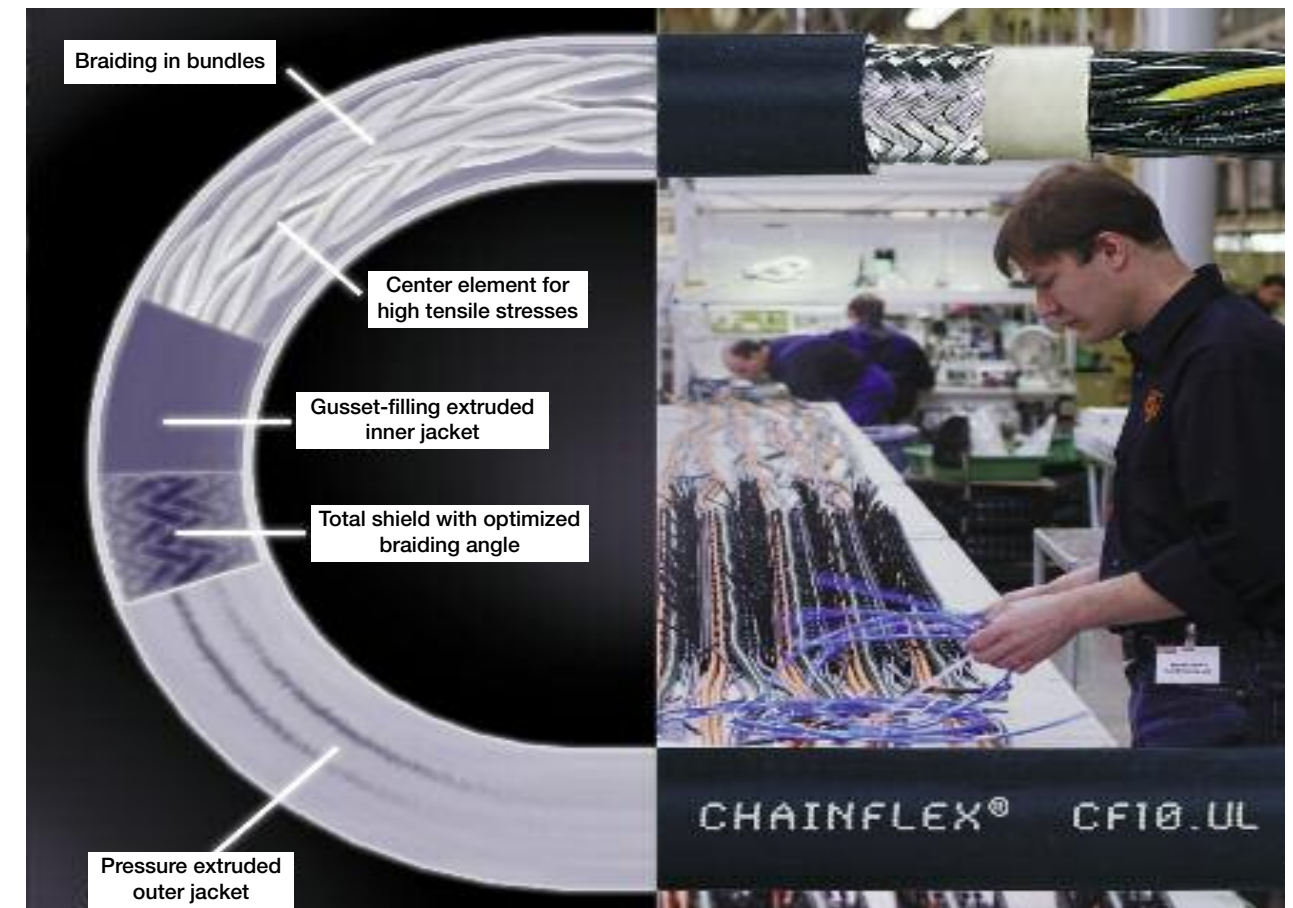

The special cable structure of chainflex® CF10.UL guarantees quality – also in the igus® harnessing.

... no minimum order quantity ...
igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu



Image exemplary.

Delivery program Part No.	Number of cores and conductor nominal cross section [mm ²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF10.UL.02.04	(4 x 0,25)C	7,0	25	71
CF10.UL.02.08	(8 x 0,25)C	8,5	37	101
CF10.UL.02.12	(12 x 0,25)C	10,0	63	153
CF10.UL.02.24	(24 x 0,25)C	13,0	109	242
CF10.UL.05.04	(4 x 0,5)C	8,5	37	101
CF10.UL.05.05 ⁽¹⁾	(5 x 0,5)C	8,5	43	111
CF10.UL.05.12	(12 x 0,5)C	13,0	106	258
CF10.UL.05.18 ⁽¹⁾	(18 x 0,5)C	15,0	146	332
CF10.UL.05.25	(25 x 0,5)C	16,0	185	411
CF10.UL.07.03	(3 G 0,75)C	8,5	40	104
CF10.UL.07.04	(4 G 0,75)C	9,0	49	123
CF10.UL.07.05	(5 G 0,75)C	9,5	68	150
CF10.UL.07.07	(7 G 0,75)C	11,0	90	194
CF10.UL.07.12	(12 G 0,75)C	14,5	143	336
CF10.UL.07.20 ⁽¹⁾	(20 G 0,75)C	17,0	213	456
CF10.UL.07.24 ⁽¹⁾	(24 G 0,75)C	19,0	276	578
CF10.UL.10.02 ⁽¹⁾	(2 x 1,0)C	8,5	38	104
CF10.UL.10.03 ⁽¹⁾	(3 G 1,0)C	9,0	48	120
CF10.UL.10.04	(4 G 1,0)C	9,5	71	155
CF10.UL.10.05 ⁽¹⁾	(5 G 1,0)C	10,5	83	174
CF10.UL.10.07	(7 G 1,0)C	12,0	111	230
CF10.UL.10.12	(12 G 1,0)C	14,5	171	370
CF10.UL.10.18 ⁽¹⁾	(18 G 1,0)C	19,0	274	545
CF10.UL.10.24 ⁽¹⁾	(24 G 1,0)C	21,5	346	709
CF10.UL.15.04	(4 G 1,5)C	10,5	192	94
CF10.UL.15.05	(5 G 1,5)C	11,0	215	112
CF10.UL.15.07	(7 G 1,5)C	13,0	149	279
CF10.UL.15.12	(12 G 1,5)C	17,5	243	508
CF10.UL.15.18	(18 G 1,5)C	21,5	375	724
CF10.UL.25.04	(4 G 2,5)C	12,0	140	268
CF10.UL.25.07	(7 G 2,5)C	15,0	227	404
CF10.UL.25.12	(12 G 2,5)C	21,5	404	804
CF10.UL.40.04	(4 G 4,0)C	13,5	206	369

(1) Delivery time upon inquiry.

Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core



eplan download, configurator ► www.igus.eu/en/CF10UL



Order example: CF10.UL.10.02 – in your desired length (0,5 m steps)
CF10.UL chainflex® series .10 Code nominal cross section .02 Number of cores



Please use www.chainflex.eu/en/CF10UL for your online order.



Delivery time 24h or today.

Delivery time means time until shipping of goods.





















950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

... no minimum order quantity ...

igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu

TPE Control cable | CF98




- for maximum load requirements and especially small radii up to 4xd
- TPE outer jacket
- oil-resistant, biooil-resistant
- PVC-free/halogen-free
- low-temperature-flexible
- hydrolysis-resistant and microbe-resistant

-  **Conductor** Conductor consisting of a highly flexible special alloy.
-  **Core insulation** Mechanically high-quality TPE mixture.
-  **Core stranding** Cores stranded in one layer with especially short pitch length.
-  **Core identification** Colour code in accordance with DIN 47100.
CF98.02.03.INI: brown, blue, black
CF98.03.04.INI: brown, blue, black, white
-  **Outer jacket** Low-adhesion mixture on the basis of TPE, especially abrasion-resistant and highly flexible, adapted to suit the requirements in energy chains®.
Colour: Steel blue (similar to RAL 5011)
-  **T/R moved** -35 °C to +90 °C, minimum bending radius 4 x d
-  **T/R fixed** -40 °C to +90 °C, minimum bending radius 3 x d
-  **v max.** 10 m/s, 6 m/s
-  **unsupported/gliding**
-  **a max.** 100 m/s²
-  **Travel distance** Short, very fast applications with small radii and tight design space, Class 4
-  **Torsion** ± 90°, with 1 m cable length
-  **UV-resistant** High
-  **Nominal voltage** 300/300 V
-  **Testing voltage** 1500 V
-  **Oil** Oil-resistant (following DIN EN 60811-2-1), biooil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4.
-  **Silicon-free** Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
-  **Halogen-free** Following EN 50267-2-1.

 eplan download, configurator ► www.igus.eu/en/CF98

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 7.4.4 (7 maximum load requirements 4 travel distance up to 400 m and more 4 oil-resistant)


-  **CE** Following 2006/95/EG
-  **Lead free** Following 2011/55/EU (RoHS-II)
-  **Clean room** According to ISO Class 1. Outer jacket material complies with CF9.15.07, tested by IPA according to standard 14644-1

Typical application area


- for maximum load requirements at 4 x d
- almost unlimited resistance to oil, also with bio-oils
- Indoor and outdoor applications, UV-resistant
- especially for short, very fast applications with small radii and tight design space
- automatic insertion machines, automatic doors, clean room, very quick handling

Delivery program Part No.	Number of cores and conductor nominal cross section [mm ²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF98.01.02	2 x 0,14	4,0	4	11
CF98.01.03 ⁽¹⁾	3 x 0,14	4,5	6	14
CF98.01.04	4 x 0,14	5,0	9	16
CF98.01.07 ⁽¹⁾	7 x 0,14	6,0	14	21
CF98.01.08	8 x 0,14	6,5	16	24
CF98.02.03.INI	3 x 0,25	5,0	12	25
CF98.02.04	4 x 0,25	5,5	16	30
CF98.02.07	7 x 0,25	6,5	26	53
CF98.02.08	8 x 0,25	7,0	30	60
CF98.03.03 ⁽¹⁾	3 x 0,34	5,0	14	28
CF98.03.04.INI	4 x 0,34	5,5	19	35
CF98.03.07	7 x 0,34	7,0	32	55
CF98.03.08 ⁽¹⁾	8 x 0,34	7,5	38	63
CF98.05.04	4 x 0,5	6,0	31	40

(1) Delivery time upon inquiry
Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

 **Order example: CF98.02.04 – in your desired length (0,5 m steps)**
CF98 chainflex® series .02 Code nominal cross section .04 Number of cores

 Please use www.chainflex.eu/en/CF98 for your online order.


















 Delivery time 24h or today.
Delivery time means time until shipping of goods.

Test data ► Page 36 or www.igus.eu/en/test10

... no minimum order quantity ...
igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu

TPE Control cable | CF99





- for maximum load requirements and especially small radii up to 4xd
- TPE outer jacket
- shielded
- oil-resistant, biooil-resistant
- PVC-free/halogen-free
- low-temperature-flexible
- hydrolysis-resistant and microbe-resistant

	Conductor	Conductor consisting of a highly flexible special alloy.
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Cores stranded in one layer with especially short pitch length.
	Core identification	Colour code in accordance with DIN 47100. CF99.02.03.INI: brown, blue, black CF99.03.04.INI: brown, blue, black, white
	Inner jacket	TPE mixture adapted to suit the requirements in energy chains®.
	Overall shield	Highly flexible alloyed special shield. Coverage approx. 70% linear, approx. 90% optical.
	Outer jacket	Low-adhesion mixture on the basis of TPE, especially abrasion-resistant and highly flexible, adapted to suit the requirements in energy chains®. Colour: Steel blue (similar to RAL 5011)
	T/R moved	-35 °C to +90 °C, minimum bending radius 4 x d
	T/R fixed	-40 °C to +90 °C, minimum bending radius 3 x d
	v max. unsupported/gliding	10 m/s, 6 m/s
	a max.	100 m/s ²
	Travel distance	Short, very fast applications with small radii and tight design space, Class 4
	UV-resistant	High
	Nominal voltage	300/300 V
	Testing voltage	1500 V
	Oil	Oil-resistant (following DIN EN 60811-2-1), biooil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4.
	Halogen-free	Following EN 50267-2-1.

 eplan download, configurator ► www.igus.eu/en/CF99

950 types from stock no cutting costs ...
(for up to 10 cuts of the same type)

Class 7.4.4 (7 maximum load requirements 4 travel distance up to 400 m and more 4 oil-resistant)




	Silicon-free	Free from silicon which can affect paint adhesion (following PV 3.10.7 – status 1992).
	CE	Following 2006/95/EG
	Lead free	Following 2011/55/EU (RoHS-II)
	Clean room	According to ISO Class 1. Outer jacket material complies with CF9.15.07, tested by IPA according to standard 14644-1

Typical application area

- for maximum load requirements at 4xd
- almost unlimited resistance to oil, also with bio-oils
- Indoor and outdoor applications, UV-resistant
- especially for short, very fast applications with small radii and tight design space
- automatic insertion machines, automatic doors, clean room, very quick handling

Delivery program Part No.	Number of cores and conductor nominal cross section [mm ²]	External diameter approx. [mm]	Copper index [kg/km]	Weight [kg/km]
CF99.01.02	(2 x 0,14)C	5,5	14	33,0
CF99.01.03 ⁽¹⁾	(3 x 0,14)C	6,0	17	37,0
CF99.01.04	(4 x 0,14)C	6,0	21	43,0
CF99.01.07 ⁽¹⁾	(7 x 0,14)C	7,5	32	62,0
CF99.01.08	(8 x 0,14)C	8,0	36	69,0
CF99.02.03.INI ⁽¹⁾	(3 x 0,25)C	6,5	25	48,0
CF99.02.04	(4 x 0,25)C	6,5	30	56,0
CF99.02.07	(7 x 0,25)C	8,0	48	85,0
CF99.02.08 ⁽¹⁾	(8 x 0,25)C	8,5	54	93,0
CF99.03.03 ⁽¹⁾	(3 x 0,34)C	6,5	27	51,0
CF99.03.04.INI ⁽¹⁾	(4 x 0,34)C	7,0	35	62,0
CF99.03.08	(8 x 0,34)C	9,0	64	105,0

⁽¹⁾ Delivery time upon inquiry
Note: The mentioned external diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

-  **Order example: CF99.01.02 – in your desired length (0,5 m steps)**
CF99 chainflex® series .01 Code nominal cross section .02 Number of cores
-  Please use www.chainflex.eu/en/CF99 for your online order.
-  Delivery time 24h or today.
Delivery time means time until shipping of goods.

... no minimum order quantity ...
igus® GmbH Cologne | Tel. +49(0)2203/9649-800 Fax -222 | info@igus.de | www.chainflex.eu

