
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	L ± (0,8)	$W\pm\frac{.01}{[0,3]}$	C ± .02 [0,5]	$M\pm \frac{.03}{[0,8]}$	H± (0,3)	T00LS
EV10-6LFB	#6	1.03 [26,2]	.30 [7,6]	.23 [5,8]	.80 [20,3]	.14 [3,6]	*CT-100A
EV10-8LFB	#8	1.05 [26,7]	.30 [7,6]	.23 [5,8]	.80 [20,3]	.16 [4,1]	CT-600A (CT-550CH) - CT-1550 - CT-1551
EV10-10LFB	#10	1.04 [26,4]	.34 [8,6]	.23 [5,8]	.80 [20,3]	.19 [4,8]	
EV10-14LFB	1/4"	1.19 [30,2]	.46 [11,7]	.36 [9,1]	.90 [22,9]	.25 [6,4]	CT-2500 (CT-2550CH)

\*RATED FOR 300V, 75°C WITH CT-100A

## NOTES:

- 1. UL LISTED AND CSA CERTIFIED FOR: A. #12-10 AWG [4,0-6,0 mm²] STRANDED COPPER WIRE
  - B. 221°F [105°C] MAX. OPERATING TEMPERATURE C. 600 V. MAX. VOLTAGE RATING
  - (1000 V. IN SIGNS, FIXTURES & LUMINARIES)
- 2. MATERIAL:
  - A. STAMPING: .04" [1,0] THK COPPER, TIN PLATED B. HOUSING: VINYL, YELLOW
- 3. WIRE STRIP LENGTH: 5/16"  $^{+1/32}_{-0}$  [7,9mm  $^{+0,8}_{-0}$ ]
- 4. SEE www.panduit.com FOR PACKAGE QUANTITIES
- 5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

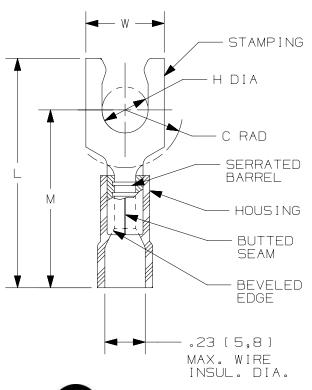





								1					
A								STRONGHOLD LOCKING FORK TERMINALS VINYL INSULATED, BUTTED SEAM #12-10 AWG					
								CUSTOMER DRAW				WING	
									00123SHT/00  DATASET FILE NAME  00123SHT_DC/00		PANDUI	TM	
								DATASELF			<b>TAN</b> UUI		
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]		MATERIAL:			
								.x :		.XXX ± ANGLES ±		SEE NOTES	
DA/12	00	2/18	JHNU	TMR	RGB	RELEASED	00123SH		THIRD ANGLE PROJECTION		DRAWING NUMBER: SH41226		
010100	REV	DATE	ВҮ	CHK	APR	DESCRIPTION	ECN	JHNU	2/18	TMR	N.T.S.	SHEET 1 OF 1	SIZE

Downloaded from Arrow.com.