Slide Potentiometer

Model PSxxM / PSxxL

Electronics

Features:

- Molded element
- 100,000 cycle life
- Metal or plastic shaft options
- With/without LED illumination
- With/without dust cover
- RoHS compliant

Dual Gang Without LED

Single Gang With LED



model otyles Available	
	PSxxM
	PSxxL

Resistance Range, Ohms 500 -1M Standard Resistance Tolerance ± 20% Resistance Tapers A.B.C.

Electrical

Model Styles Available

Residual Resistance	Terminals 1 to 2:Less than 10 ohms
	Terminals 2 to 3:Less than 30 ohms

Input Voltage, Maximum	Linear B taper: 200 Vac	Other tapers: 150 Vac

Power rating, Watts (Single Unit / Dual Unit)

Linear B taper: 20mm: 0.1W / 0.05W, 30mm: 0.2W / 0.1W / 45mm: 0.25W / 0.125W, 60mm: 0.2W / 0.2W

Other tapers: 20mm: 0.05W / 0.025W, 30mm: 0.1W / 0.05W 45mm: 0.125W / 0.06W, 60mm:0.1W / 0.1W

Dielectric Strength300Vac, 1 minuteInsulation Resistance, Minimum10M ohms at 250Vdc/ 1 minuteSliding NoiseLess than 100mVGang Error±3dB (-40dB to 0dB)

Mechanical

Static Stop Strength, Minimum	5.0 Kgf/cm
Operating Force	10gf to 100gf
Detent Slip-out force	30gf to 200gf

Durability

Sliding Life 100,000 cycles


Slide Potentiometer

Model PSxxM / PSxxL




Ordering

Model PSxxM (Without LED)

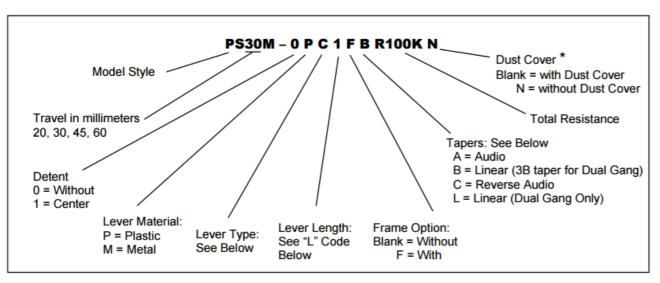

Model PSxxL (With LED)

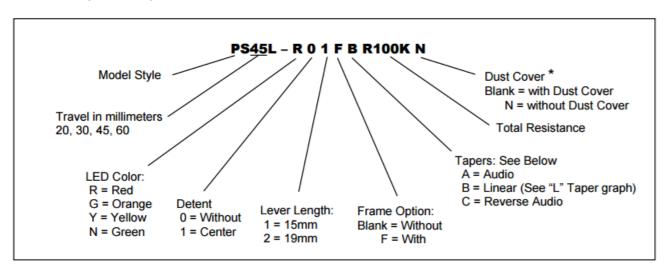


Standard Resistance Values, ohms


500 1K 2K 5K 10K 20K 50K 100K 200K 500K 1 MEG	500	1K	2K	5K	10K	20K	50K	100K	200K	500K	1 MEG
---	-----	----	----	----	-----	-----	-----	------	------	------	-------


Model PSxxM / PSxxL




Tapers
For Dual Gang units ONLY, the Standard Taper is a 3B taper
If Linear Taper is desired, use "L" taper option










Model PSxxM / PSxxL




Outline Drawings

Plastic Lever Types (For PSxxM Only)

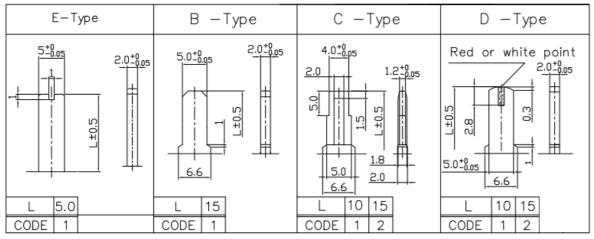

Dust Cover option not offered for levers less than 10 mm in length

Metal Lever Types (For PSxxM Only)

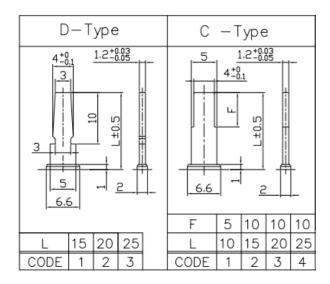

^{*} Dust Cover option not offered for levers less than 10 mm in length

Model PSxxM / PSxxL




Outline Drawings


Model PSxxM (Without LED)


With Dust Cover


A±0.5 B±0.2 2-M2X0.4




Without Dust Cover

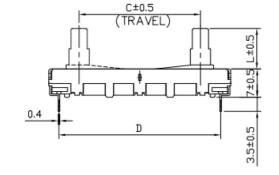





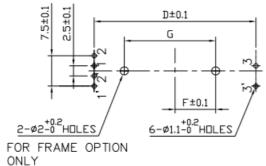

For PSxxM and PSxxL

MODEL		Α	В	С	D	F	G
PS20M	PS20L	35	31	20	30	5	12.5
PS30M	PS30L	45	41	30	40	10	22.5
PS45M	PS45L	60	56	45	55	15	32.5
PS60M	PS60L	75	71	60	70	22.5	47.5

Slide Potentiometer

Model PSxxM / PSxxL




Outline Drawings


Model PSxxL (With LED)

With Dust Cover


Without Dust Cover

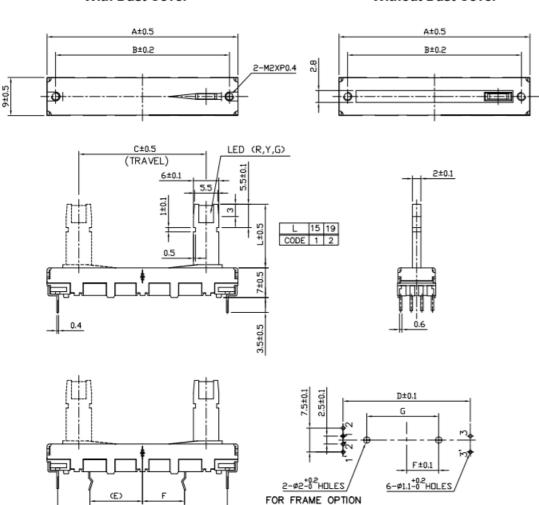


ONLY



FRAME OPTION (F)



PSxxM (Dual gang)



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

PS45L-R02BR100K PS45M-0MC2BR10K PS60M-0MC2BR100K PS45L-G02BR100K PS20M-0MC4FBR10K PS45L-N02BR100K PS45M-0MC2FAR50K PS30M-0PB1FBR100K PS45M-0MC2BR10KN PS45M-0MC2AR1K PS45L-G02AR100K PS30L-G11BR1K PS45L-N01FBR100KN PS20M-0MC2FBR20K PS45L-R02AR1MEG PS60M-0MC2FBR20K PS45L-R02BR10KN PS45L-N02BR10K PS45L-N02AR1MEG PS30L-R01BR1K PS30M-0PC1FBR10K PS45M-0MC2AR5K PS45L-G02BR1K PS45L-R02BR10K PS45M-1PD2FLR10KN PS60M-0MC2FBR10K PS60M-0MC2BR10K PS20M-0MC2FBR10K PS30L-R01BR20KN PS45M-0MC2LR10K PS60M-0MC1BR10K PS45M-0MD2LR20K PS60M-0MC1BR50K PS60L-N01FBR50K PS45M-0MC1BR100K PS45M-0MC1BR1MEG PS20L-R01FAR100K PS60M-0MC1BR500 PS45L-R02AR100K PS30L-N12FBR10K PS45L-Y01BR50K PS20L-G01AR100K PS45M-1MD2LR10K PS45L-R02BR1K PS60M-0MC1BR5K PS20M-1MD1FBR20K PS45M-1PD2FBR10KN PS20M-0PB1FAR500 PS20M-0PB1FAR500N PS45M-0MC1BR500K PS30L-R01AR500K PS45M-1MD2LR20K PS60M-0MC1BR100K PS20L-R01FBR10K PS45M-0PE1FBR100KN PS30L-G02FBR50KN PS20M-1PD2BR10K PS20M-1PD2FBR10K PS45M-0MC1BR10K PS45M-0MC1FBR10K PS20M-0MC1LR10K PS45L-Y02BR100K PS20M-0MC1BR10K PS20L-G01BR10K PS60M-0MD1AR20K PS45M-0MC1BR50K PS45L-R01FAR50KN PS45M-0MD1FBR10KN PS20M-0PC1FBR100K PS45M-0MC1BR1K PS45M-0MC3BR10K PS45M-0PD1FBR10KN PS45L-N02BR1K PS60M-1MC2FBR20K PS45M-0MC2LR10KN PS60M-0MC2AR1MEG PS20L-R01BR100K PS60M-0MC2AR100K PS60M-0MC2LR100K PS45M-1MD1LR20K