



OM-0100-C8

Low Power Clock Oscillator 100.000 kHz

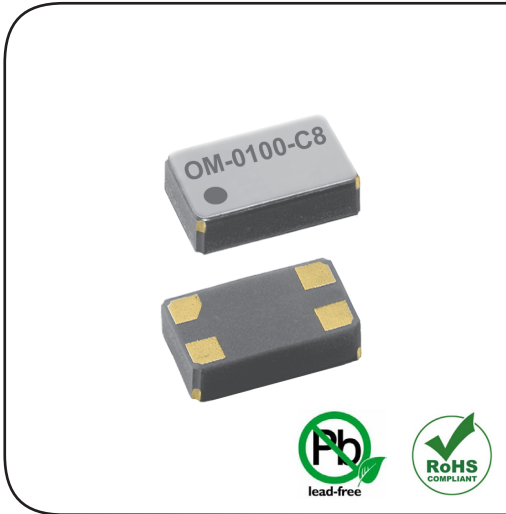

DIMENSIONS

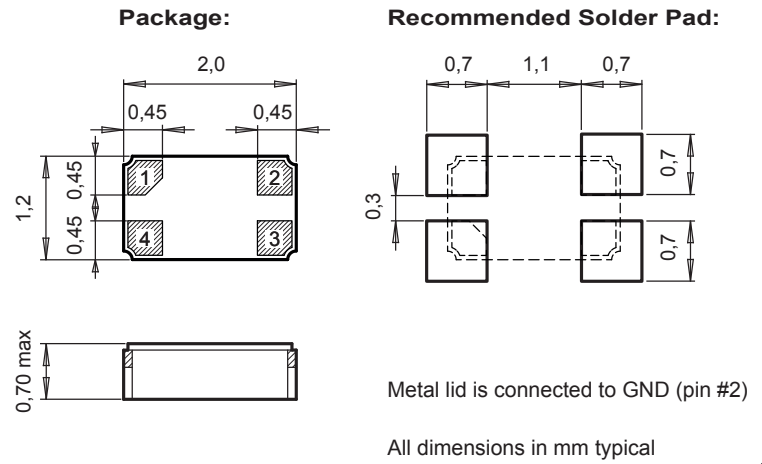

APPLICATIONS

lot
 Metering
 Industrial
 Automotive
 Health Care
 Wearables, Portables


DESCRIPTION

The OM-0100-C8 is a Low Frequency SMT Oscillator that incorporates an integrated CMOS circuit together with an XTAL. It operates under vacuum in a hermetically sealed ceramic package with metal lid.


FEATURES

Wide supply voltage range.
 Very low power consumption.
 CLKOUT enable/disable.
 Small size, low profile, lightweight (5.1 mg).
 High shock and vibration resistant.
 100% Pb-free, RoHS-compliant.
 Automotive qualification according to AEC-Q200 available.

BLOCK DIAGRAM

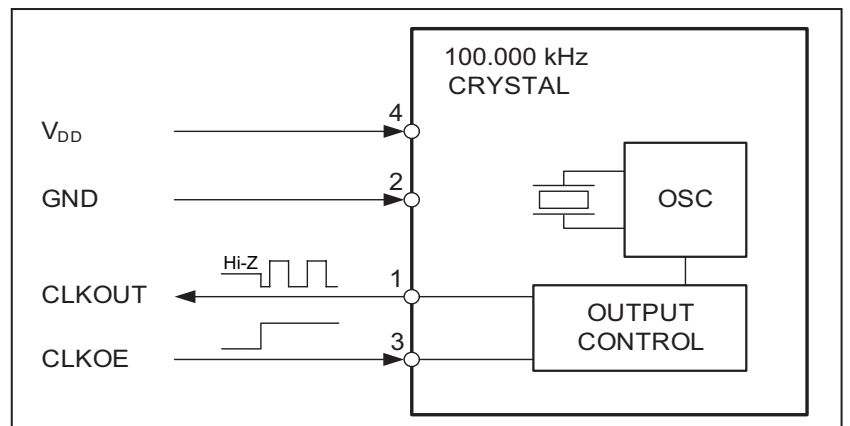

PIN CONNECTIONS TOP VIEW

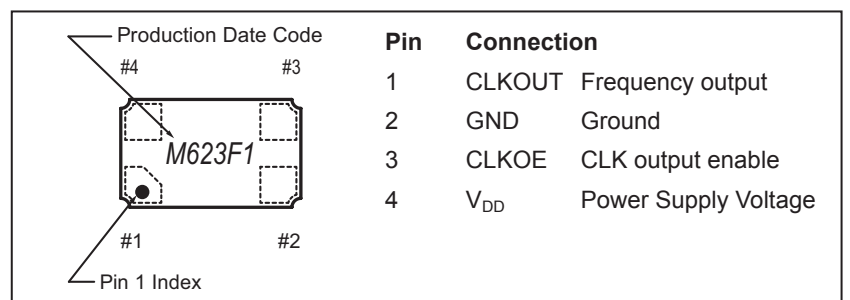

ELECTRICAL CHARACTERISTICS AT 25°C

More detailed information can be found in the Application Manual.

Output Frequency	F	100.000	kHz
Frequency tolerance	¹⁾ $\Delta F/F$	±100	ppm
Supply voltage	V _{DD}	1.6 – 5.5	V
Current consumption (typ./max.)	²⁾ I _{DD}	0.55 / 0.75	µA
Duty cycle (min./max.)		40 / 60	%
Start up time (max.)	t _{start}	0.5	s
Voltage coefficient (max.)		±3	ppm/V
Aging first year max. @ 25°C	$\Delta F/F$	±3	ppm
Turnover temperature (typ.)	T ₀	28 ±5	°C
Frequency vs. temperature	$\Delta F/F_0$	-0.035 ppm/°C ² (T - T ₀) ² ±10%	ppm

1) Tighter tolerances on request.

2) V_{DD} = 3.0 V, CLKOE = LOW.


ENVIRONMENTAL CHARACTERISTICS

	Conditions	Max. Dev.
Storage temp. range	-55 to +125°C	
TA Operating temperature range	-40 to +85°C	
Shock resistance	$\Delta F/F$ 5000 g, 0.3 ms, ½ sine	±5 ppm
Vibration resistance	$\Delta F/F$ 20 g / 10–2000 Hz	±5 ppm

TERMINATIONS AND PROCESSING

Type	Termination	Processing
OM-0100-C8	Au flashed pads	IPC/JEDEC J-STD-020C 260°C / 20 - 40 s

FREQUENCY TEMPERATURE CHARACTERISTICS

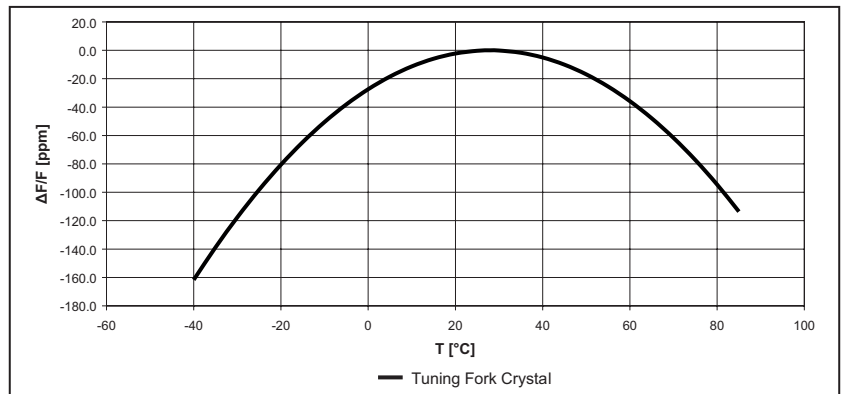

ORDERING INFORMATION

O M - 0100 - C8 ±20 ppm TA QC

Oscillator		Qualification
Metal lid		QC = Commercial Grade (Standard)
Frequency		QA = Automotive Grade AEC-Q200
0100 = 100.000 kHz		Temperature range
Package size		TA = -40 to +85°C (Standard)
C8 = 2.0 x 1.2 x 0.70 mm		Frequency tolerance

A unique part number will be generated for each product specification, i.e:

20xxxx-MC01	1'000 pcs (in 8 mm tape on 7" reel)
20xxxx-MC03	3'000 pcs (in 8 mm tape on 7" reel)

All specifications subject to change without notice.



A COMPANY OF THE SWATCH GROUP

Micro Crystal AG
Muehlestrasse 14
CH-2540 Grenchen
Switzerland

Phone +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Micro Crystal:](#)

[OM-0100-C8-100.00KHZ-20PPM-TA-QC](#)