


# Grove - Screw Terminal

**Table of contents**[Version](#)[Features](#)[Platforms Supported](#)[Schematic Online Viewer](#)[Resources](#)[Projects](#)[Tech Support](#)

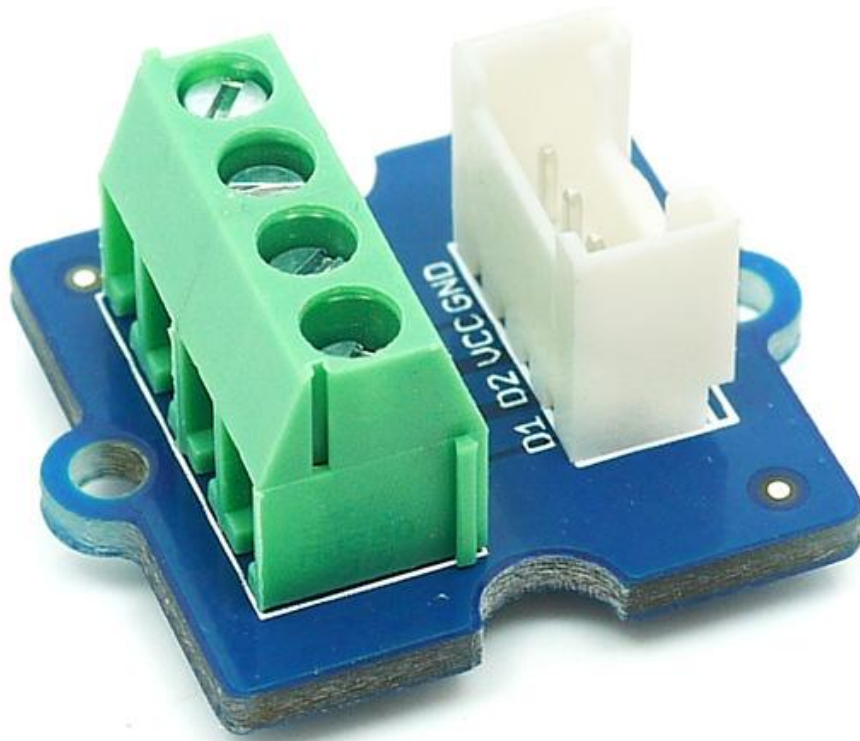

Grove - Screw Terminal with four 3.5mm pitch pins rate up to 125V @ 6A. Terminal can accept 30 to 20AWG wire. It is the most common pitch screw terminal. This grove has four ports, including GND, VCC and two other undefined ports. Screw terminals are commonly used to connect a chassis ground, such as on a record player or a surge protector. Most public address systems in buildings also use them for speakers, and sometimes for other outputs and inputs.

## Version

Product Version	Changes	Released Date
Grove-Screw Terminal V1.0	Initial	Oct 2011

## Features

- 3.5mm standard pitch pin
- High current/voltage adaptable

## Platforms Supported



**Caution**

The platforms mentioned above as supported is/are an indication of the module's software or theoretical compatibility. We only provide software library or code examples for Arduino platform in most cases. It is not possible to provide software library / demo code for all possible MCU platforms. Hence, users have to write their own software library.

## Schematic Online Viewer



## Resources

- [\[Eagle&PDF\]Grove-Screw Terminal.zip](#)
- [\[PDF\] Screw-Terminal-3.5mm Dimension](#)

## Tech Support

Please submit any technical issue into our [forum](#).

