

SSV66A-1G Series

Vertical switches G1" mount



- External mount via G1" (1" BSP) thread
- 20bar max working pressure
- Reversible switch action
- DIN 43650 (EN 175301-803-A) connector

Technical Specification

Mounting style	External	Connection	DIN 43650 Plug (EN 175301-803-A)
Mounting thread	1" BSP		
Float & Stem material	316 grade SS		
Maximum Temperature	-20 to +120°C		
Maximum pressure	20 bar		
Float SG	0.7		A suitable sealing ring/washer should be used to ensure a good seal.
Minimum fluid SG	0.75		

Electrical Specification

Contact Form		N/O (N/C)
Switching Power Max	VA	50
Switching Voltage AC Max	V	300
Switching Voltage DC Max	V	300
Switching Current Max	A	0.5

All ratings are for resistive loads only.

Top mount level switch with G1" (1" BSP) thread, enables this switch can be fitted to a tank through a G1" boss, without requiring access to the inside of the tank.


The DIN 43650 (EN 175301-803-A) connector makes for easy connection.

The switch action may be reversed by removing the float, inverting and refitting it.

Standard Parts	Material	Switch level	Switch Action	Max Power	Connection
SSV66A100E1GP	SS 316	100mm	Make on rise	50VA	DIN 43650 (EN 175301-803-A)
SSV66A150E1GP	SS 316	150mm	Make on rise	50VA	DIN 43650 (EN 175301-803-A)
SSV66A200E1GP	SS 316	200mm	Make on rise	50VA	DIN 43650 (EN 175301-803-A)

Custom versions can be made for particular applications. Please contact Cynergy3 with your requirements.

Mechanical Dimensions

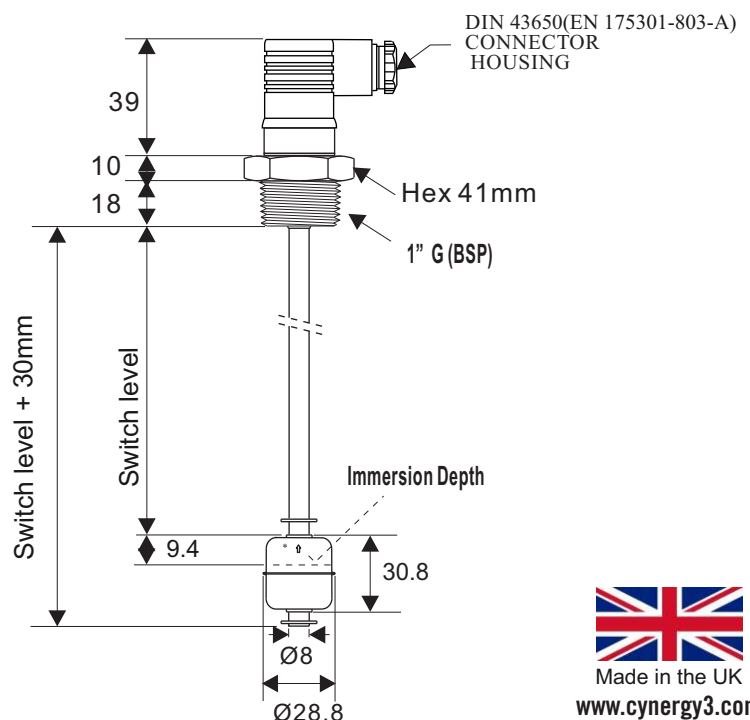

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE, UK
Telephone: +44 (0)1202 897969
Email: c3w_sales@sensata.com

ISO9001 CERTIFIED

cynergy3-ssv66a-1g-v2



Made in the UK

www.cynergy3.com