



NOTES:

- MATERIALS AND FINISHES:  
 BODY & COUPLING NUT - STAINLESS STEEL, PASSIVATED  
 CONTACTS - BeCu, GOLD PLATED  
 RETAINING RING - STAINLESS STEEL, NATURAL  
 INSULATOR - PTFE, NATURAL
- ELECTRICAL:  
 A. IMPEDANCE: 50 OHM  
 B. PHASE STABILITY: 4.6° MAX.  
 C. AMPLITUDE STABILITY: 0.15 dB MAX.
- MECHANICAL:  
 A. DURABILITY: 5000 CYCLES MIN.  
 B. TEMPERATURE RANGE: -55°C TO 200°C
- PACKAGING:  
 A. QUANTITY: SINGLE PACK  
 B. MARKING: BAG TO BE MARKED:  
 "AMPHENOL RF, 95-909-168XXXX, AND DATE CODE"  
 C. CONTENTS: CABLE ASSEMBLY, VSWR AND INSERTION PLOT OF INCLUDED CABLE, AND ROHS.

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	07-May-19	11448	BEW
B	IL VALUE & LENGTH TABLE UPDATED	26-Sep-19	13061	SK
C	NO CHANGES TO THIS SHEET	01-Oct-19	13124	BEW

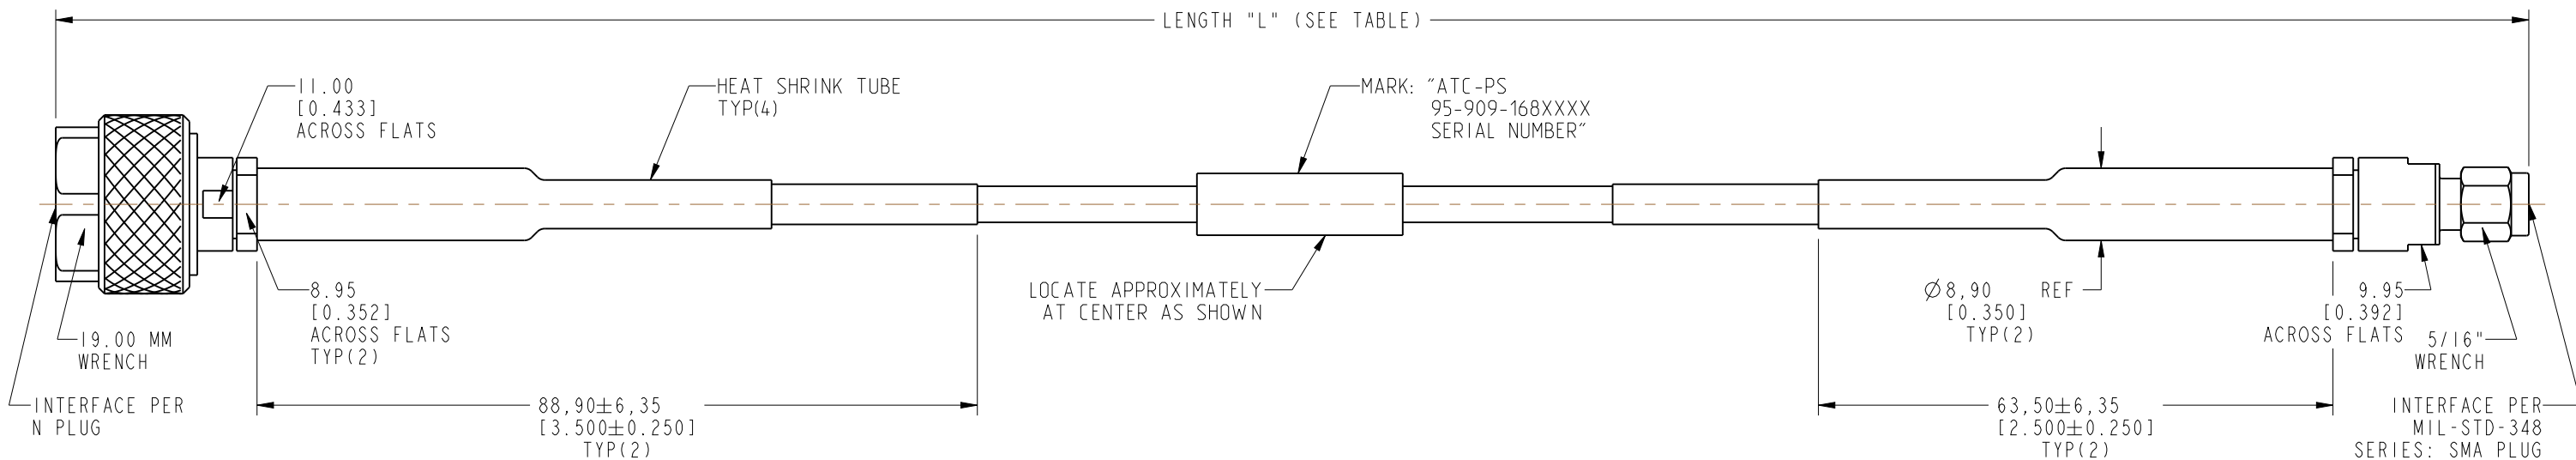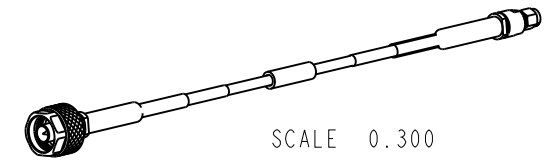

PART NUMBER	LENGTH "L" IN INCHES [METERS]	INSERTION LOSS dB (MAX.)
95-909-168-024	24.00 [0.610]	1.84
95-909-168-036	36.00 [0.914]	2.61
95-909-168M100	39.37.00[1.000]	2.84
95-909-168-048	48.00 [1.219]	3.37
95-909-168-060	60.00 [1.524]	4.14
95-909-168-072	72.00 [1.829]	4.90

DESIGN REQUIREMENTS:

- FREQUENCY: DC - 18 GHz     CONTINUITY
- VSWR: 1.30 MAX.     HI-POT: 1000 VRMS
- INS. LOSS: SEE TABLE     OTHER

**CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:  
 <0.5mm ±0.05mm    0.5 - 6mm ±0.1mm    6 - 30mm ±0.2mm    30 - 120mm ±0.3mm    ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL SEE NOTES	DRAWN B. WYMAN	DATE 17-Apr-19
REFERENCE EAR# 7108	ENGINEER B. WYMAN	DATE 17-Apr-19
REF: 95-902-466-XXX	APPROVED K. CAPOZZI	DATE 26-Sep-19
CONFIGURATION LEVEL: In Work	CAD FILE	
FINISH		

TITLE N STR PLUG TO SMA STR PLUG USING ATC-PS TEST CABLE	DWG SIZE B	REV C
SCALE: 1.3:1.0	SHEET 2 OF 2	

Amphenol RF	
www.amphenolrf.com	
DRAWING NO.	95-909-168XXXX
ITEM NO.	95-909-168XXXX
PART NO.	95-909-168XXXX

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[095-909-168-024](#) [095-909-168-060](#) [095-909-168M100](#) [095-909-168-048](#) [095-909-168-072](#) [095-909-168-036](#)