


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
C	CHNAGE 11.81 TO 11.43 PER ACTUAL PART	OCT29/12	L.CHAN
D	UPDATE DRAWINGS	MAY23/17	L.CHAN

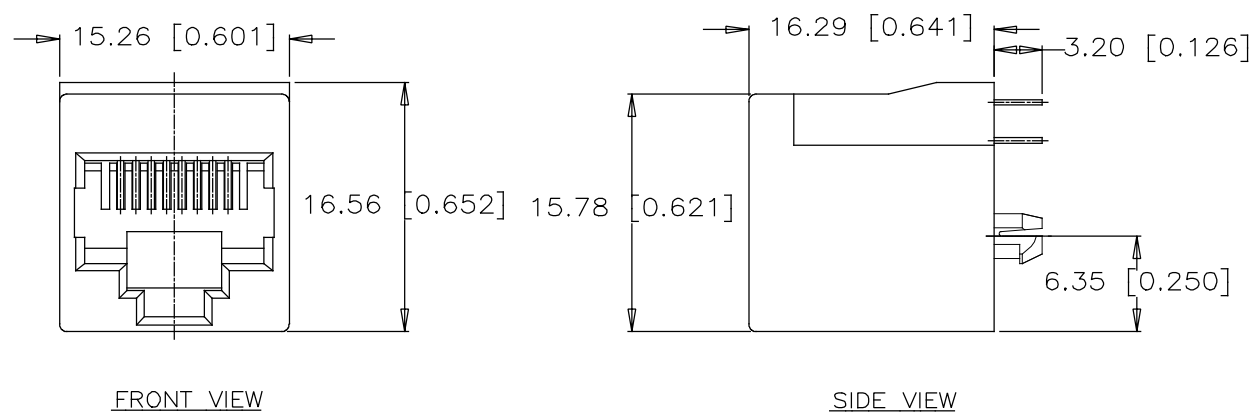


- MATERIALS:**
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0
 COLOR: BLACK

 CONTACTS: PHOSPHOR BRONZE
 PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES
 SEE AMPHENOL PART NUMBER FOR DETAIL.
 50 μ" [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ" [2.54 MICRONS]
 MIN. MATTE TIN OR GOLD FLASH
 ON CONTACT TAILS.

- MECHANICAL:**
 MATING FORCE: 5.0 LBS MAX.
- ELECTRICAL:**
 CONTACT RESISTANCE: 40 MILLIOHMS MAXIMUM
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM
 CURRENT RATING: 1.5 AMPS
 VOLTAGE RATING: 125 VOLTS AC
- ENVIRONMENTAL:**
 STORAGE TEMPERATURE: -20°C to 85°C
 PACKAGING METHOD: TRAY PACKAGING

PART NUMBER: RJE08-188-0X10

- GOLD PLATING:**
- 1 = 6 μ"
 - 2 = 15 μ"
 - 3 = 30 μ"
 - 4 = 50 μ"

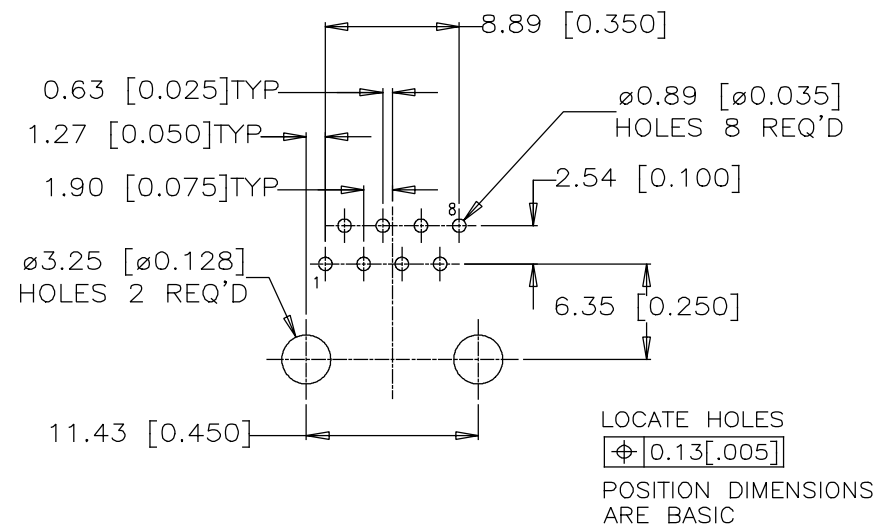

RECOMMENDED P.C.B. LAYOUT
 (COMPONENT SIDE OF BOARD)
 TOLERANCE: ±0.05 [.002](TOP VIEW)

UNLESS SPECIFIED OTHERWISE	DRAWN PAULW	DATE DEC 09/05
PRIMARY UNITS MILLIMETER	CHECKED LAWRENCE.C	DEC 05/05
SECONDARY INCH	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APPR.	
1 DECIMAL PLACE ±0.30	ENG. REL. NO.	
2 DECIMAL PLACES ±0.25	REF.	
3 DECIMAL PLACES ±0.20	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
ANGULAR DEGREES ±1.0°		

Amphenol Canada Corp. www.amphenolcanada.com	
TITLE	MODULAR JACK, TOP ENTRY, 8 POSITION, 8 CONTACTS, WITHOUT FLANGE, UNSHIELDED, - RoHS COMPLIANT
DWG. NO.	P-RJE08-188-0X10
CODE ID NO. 03554	DWG SIZE: C SCALE: N/A SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

[RJE08-188-0110H](#) [RJE08-188-0210](#) [RJE08-188-0210H](#) [RJE08-188-0310H](#) [RJE08-188-0410](#) [RJE08-188-0410H](#)
[RJE08-188-0110](#)