

INTERCONNECTS

SERIES 329, 380, 429, 480 • .100" GRID SOLDER CUP HEADERS AND SOCKETS • SINGLE AND DOUBLE ROW STRIPS

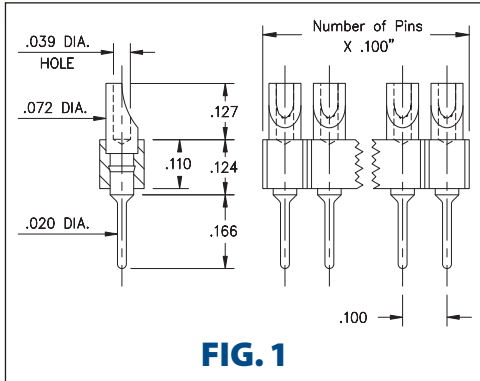


FIG. 1

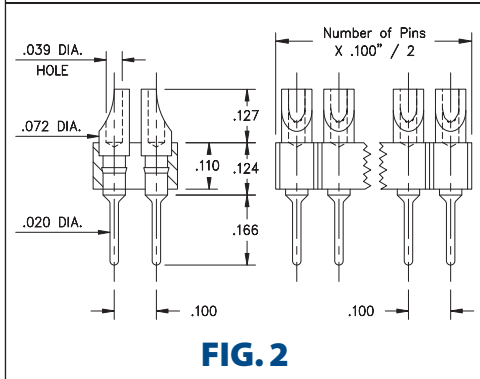


FIG. 2

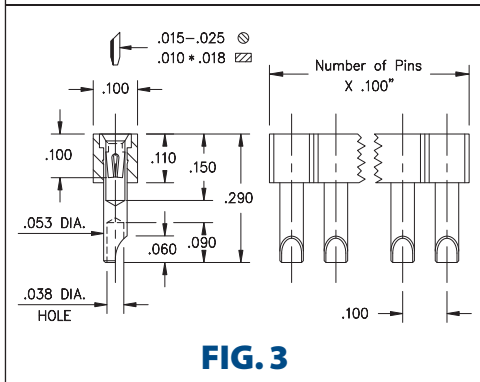


FIG. 3


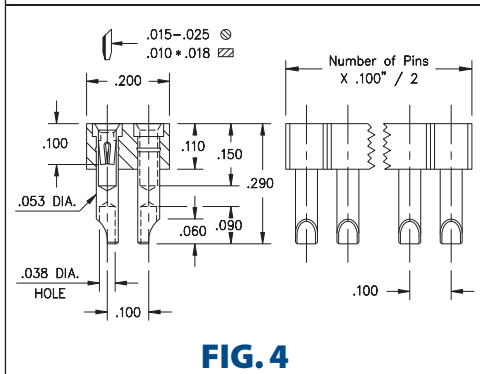


FIG. 4

- Series 380 & 480 use MM #8000 pins. See page 216 for details
- Series 329 & 429 use MM #2954 receptacles and accept pin diameters from .015"-.025". See page 171 for details
- Series 329 & 429 receptacles use Hi-Rel, 4-finger BeCu #30 contact rated at 3 amps. See page 253 for details
- Soldercups are pre-aligned
- Insulators are high temperature thermoplastic, suitable for all soldering operations

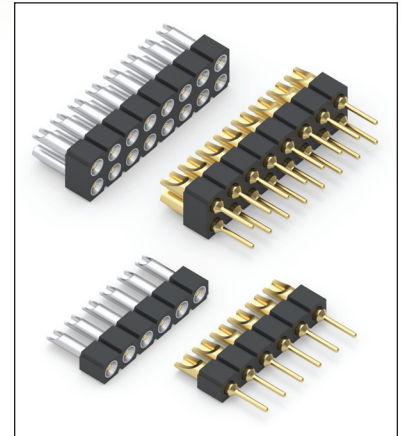

ORDERING INFORMATION

FIG. 1	Series 380...001	Single Row Solder Cup / Solder Tail
	380-XX-1__-00-001000 Specify number of pins 01-64	
FIG. 2	Series 480...001	Double Row Solder Cup / Solder Tail
	480-10-2__-00-001000 Specify number of pins 02-64	
XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264		
SPECIFY PLATING CODE XX=		
Pin Plating	10 10 μ" Au	90 200 μ" Sn/Pb
	40 200 μ" Sn	

FIG. 3	Series 329...540	Single Row Solder Cup Sockets
	329-XX-1__-41-540000 Specify number of pins 01-64	
FIG. 4	Series 429...540	Double Row Solder Cup Sockets
	429-XX-2__-41-540000 Specify number of pins 02-64	
XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264		
SPECIFY PLATING CODE XX=		
Sleeve (Pin)	11 10 μ" Au	13 10 μ" Au
	41 200 μ" Sn	43 200 μ" Sn
Contact (Clip)	10 μ" Au	30 μ" Au



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[429-43-264-41-540000](#) [329-43-164-41-540000](#) [429-13-264-41-540000](#)