
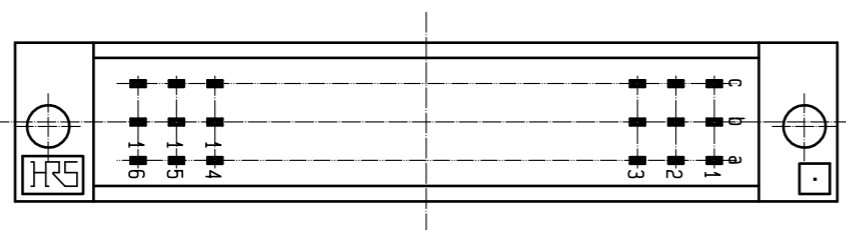
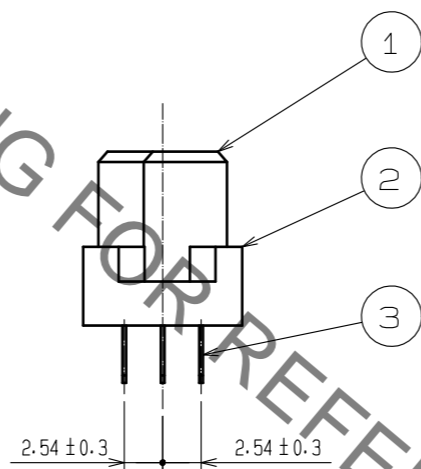
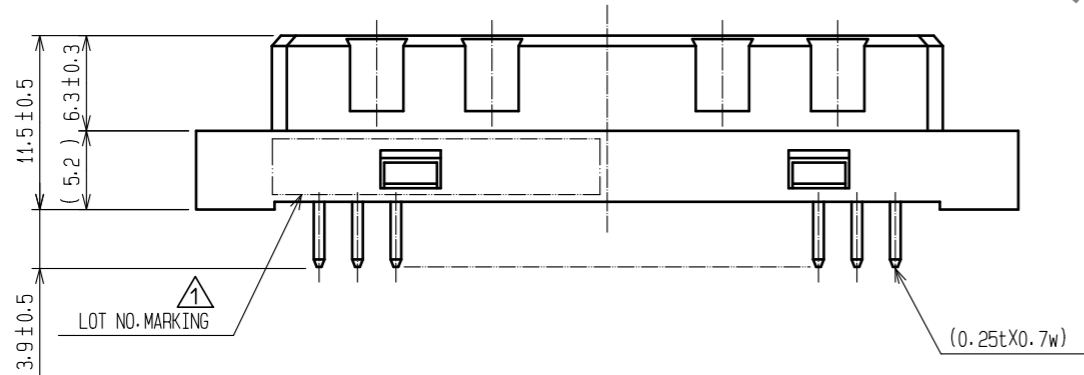
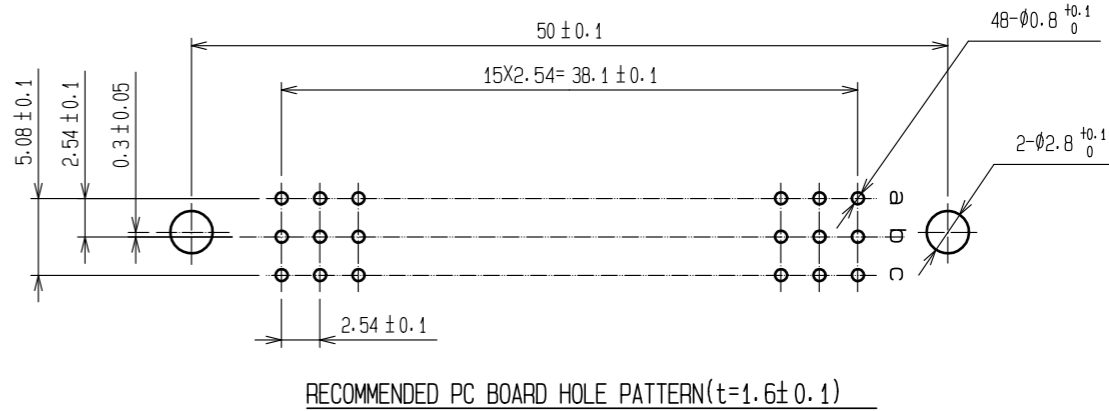


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

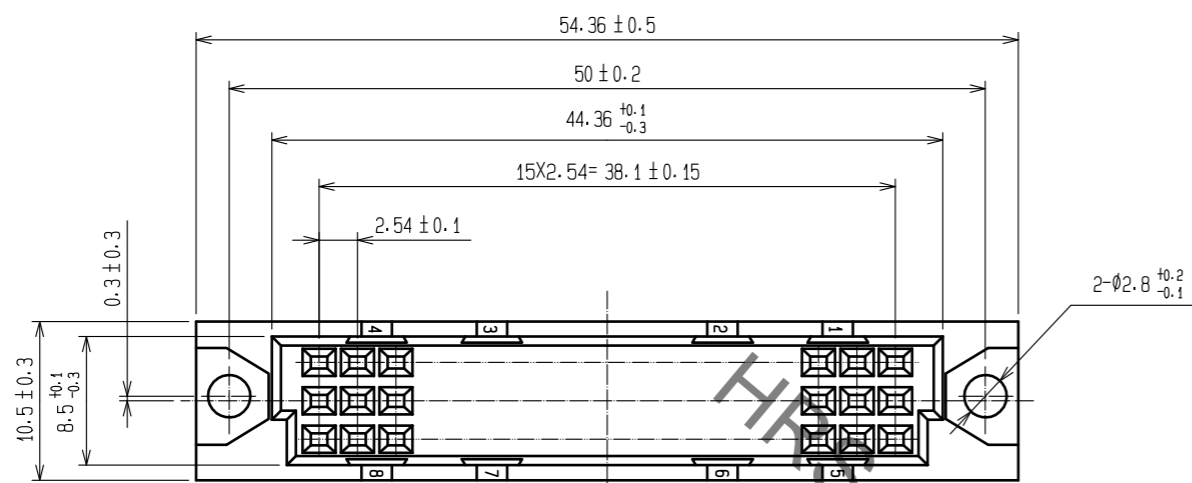

| | | |
|------|--------------|-----------------------------|
| 3 | COPPER ALLOY | CONTACT AREA: Ni1#m+Au0.2#m |
| | | DIP AREA : Ni1#m+Sn1#m |
| 1, 2 | PBT | GRAY UL94V-0 |
| NO. | MATERIAL | FINISH, REMARKS |

| | | | | | | | |
|--------------------------------------|--|---------------------------------|----------------------------|--|--------------------------------|--------------------------|------------------|
| UNITS mm | | SCALE 2 : 1 | COUNT 1 | DESCRIPTION OF REVISIONS DIS-F-00006644 | DESIGNED AK. IWAHORI | CHECKED HT. YAMAGUCHI | DATE 20200929 |
| HRS HIROSE ELECTRIC CO., LTD. | | APPROVED : KI. AKIYAMA 20080220 | DRAWING NO. EDC3-018915-01 | | PART NO. PCN10-48S-2.54DSA(72) | | |
| | | CHECKED : SI. TOMIOKA 20080219 | CODE NO. CL583-0065-4-72 | | 1/1 | | |
| | | DESIGNED : NH. SUGITA 20080219 | | | | | |
| | | DRAWN : NN. ONDA 20080219 | | | | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[PCN10-48S-2.54DSA\(72\)](#)