



## DR22 SERIES | DC OUTPUT

DIN RAIL MOUNT SOLID STATE RELAYS



### Features

- Output ratings up to 30 Amps at 200 VDC
- Integral heat sink eliminates the need for complex thermal calculations
- DBC substrate for superior thermal performance
- LED input status indicator
- IP20 touch-safe housing
- 1kHz Maximum PWM Frequency
- 3750 VAC optical isolation
- C-UL-US approved



### PRODUCT SELECTION

Control Voltage	20 A	30 A
4-32 VDC	DR2220D20U	DR2220D30U



### SPECIFICATIONS

#### Output <sup>(1)</sup>

Description	20 A	30 A
Absolute Maximum Rating [VDC]	200	200
Recommended Operating Voltage [VDC]	1-150	1-150
Maximum Off-State Leakage Current @ Rated Voltage [mA]	0.1	0.2
Load Current, DC General Use UL508 @ 40°C [ADC]	20	30
Load Current, DC Motor Starting UL508 FLA @ 40°C [ADC]	4.1	5.4
Minimum Load Current [mA] <sup>2</sup>	5	5
Maximum Surge Current [ADC] (10ms)	58	86
Maximum On-State Voltage Drop @ Rated Current [VDC]	0.680	0.535
Maximum On-State Resistance [RDS-ON][Ohms]	0.034	0.016
Maximum Pulse Width Modulation Frequency [Hz] <sup>3</sup>	1000	900
Motor Rating UL 508 [HP (kW)]: 120 VDC	1/3 (0.25)	1/2 (0.37)

## Input <sup>(1)</sup>

Description	DC Control
Control Voltage Range	4-32 VDC
Maximum Reverse Voltage	-32 VDC
Minimum Turn-On Voltage <sup>4</sup>	4 VDC
Must Turn-Off Voltage	1 VDC
Minimum Input Current (for on-state)	11 mA
Maximum Input Current	15 mA
Nominal Input Impedance	Current Regulated
Maximum Turn-On Time [µsec]	75
Maximum Turn-Off Time [µsec]	100


## General <sup>(1)</sup>

Description	Parameters
Dielectric Strength, Input to Output (50/60Hz)	3750 Vrms
Dielectric Strength, Input/Output to Case (50/60Hz)	2500 Vrms
Minimum Insulation Resistance (@ 500 VDC)	10 <sup>9</sup> Ohms
Maximum Capacitance, Input/Output	8 pF
Ambient Operating Temperature Range	-40 to 80 °C
Ambient Storage Temperature Range	-40 to 100 °C
Weight (typical)	10.5 oz (298 g)
Housing Material	UL94 V-0
Heat Sink Material	Aluminum
Din Rail Clip Material	Zinc Plated Steel
Hardware Finish	Nickel Plating
Input Terminal Screw Torque Range (lb-in/Nm)	13-15/1.5-1.7
Load Terminal Screw Torque Range (lb-in/Nm)	13-15/1.5-1.7
Humidity	95% non-condensing
LED Input Status Indicator	Green




## INPUT CURRENT INFORMATION

### 4-32 VDC Input

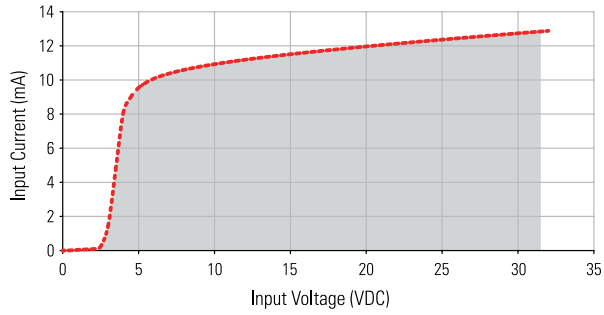


## SURGE CURRENT INFORMATION

### DR2220D20U

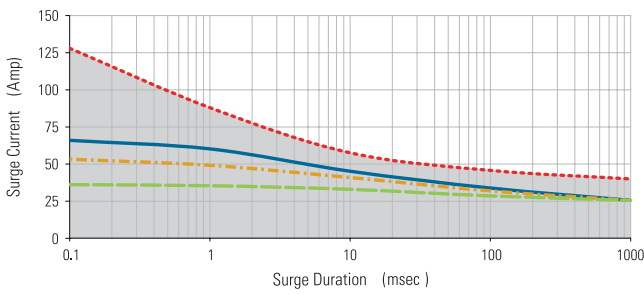

### DR2220D30U

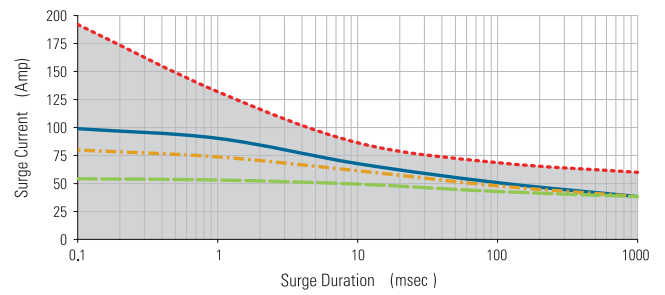

--- Single Pulse \*    — Duty Factor (10%) \*\*    - - - Duty Factor (20%) \*\*    - - - Duty Factor (50%) \*\*

For Pulse Width Modulation applications select the curve according to the duty factor and pulse duration as follows:

$$\text{Duty Factor} = \frac{\text{Pulse Width}}{\text{Period}} \times 100 (\%)$$

Duty Factor 10%



Duty Factor 20%



Duty Factor 50%




\* for Single Surge Pulse  $T_c=40^\circ\text{C}; T_j=175^\circ\text{C}$

\*\* for Repetitive Surge Pulse  $T_c=40^\circ\text{C}; T_j=130^\circ\text{C}$




## THERMAL DERATE INFORMATION

### DR2220D20U

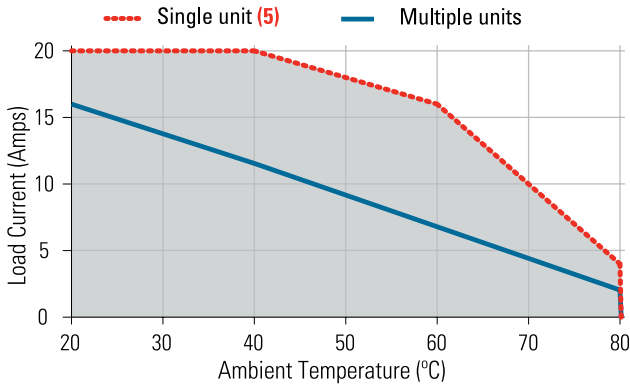


### DR2220D30U

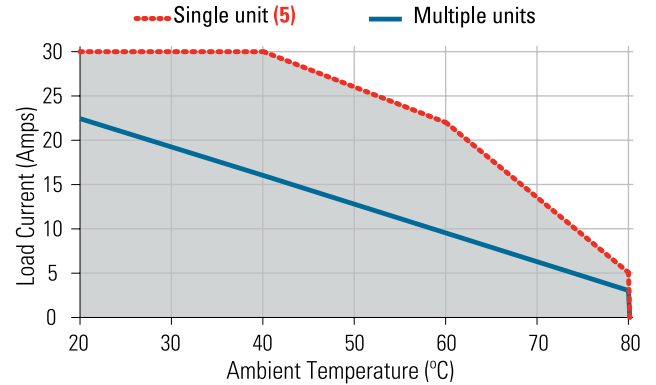



## EQUIVALENT CIRCUIT BLOCK DIAGRAMS/WIRING DIAGRAM

Load can be wired in position A or B inductive loads must be diode suppressed.

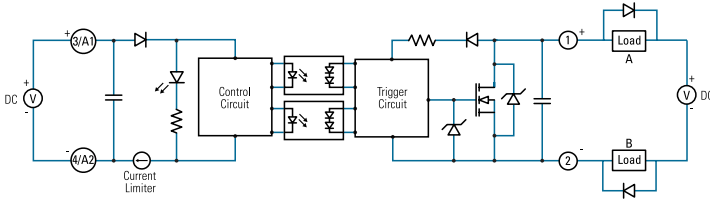


### Recommended Wire Sizes

Terminal Configuration	Wire Size (Solid / Stranded)	Wire Pull-Out Strength (lb)[N]
<b>Output Relay "U" suffix</b>	2 x 18 AWG (1 mm <sup>2</sup> ) Stranded	20 [88]
	2 x 10 AWG (6 mm <sup>2</sup> ) Stranded	60 [266]
<b>Input Relay "U" suffix</b>	2 x 18 AWG (1 mm <sup>2</sup> ) Stranded	20 [88]
	2 x 12 AWG (4 mm <sup>2</sup> ) Stranded	40 [177]




## MECHANICAL SPECIFICATIONS

\*Tolerances: ±0.02 in / 0.5 mm All dimensions are in: inches [millimeters]

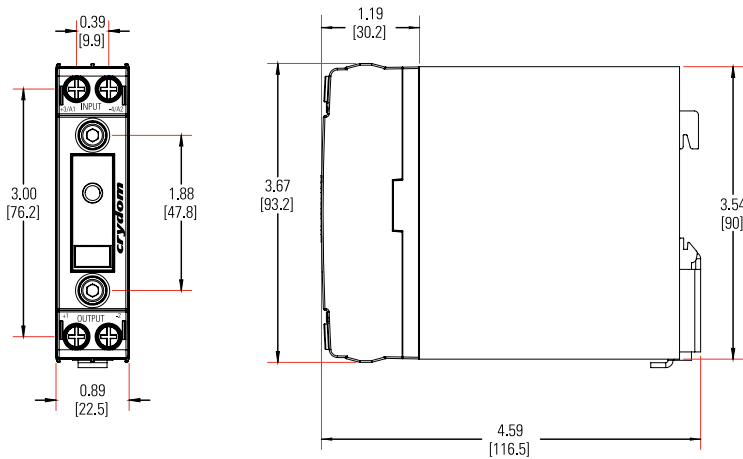

### Protective Earth Connection




Protective Earth (PE) screw type recommended is 10-32 UNC standard not provided with SSR. Through the use of a DIN rail ground (protective conductor) terminal block, the DIN rail itself can be used as the grounding bus bar. In this case, the zinc plated steel material used for the DIN rail clip of DR22 models, permits a secure path to ground and avoid the need of a further PE connection.



## ORDERING OPTIONS

Example : DR2220D20U

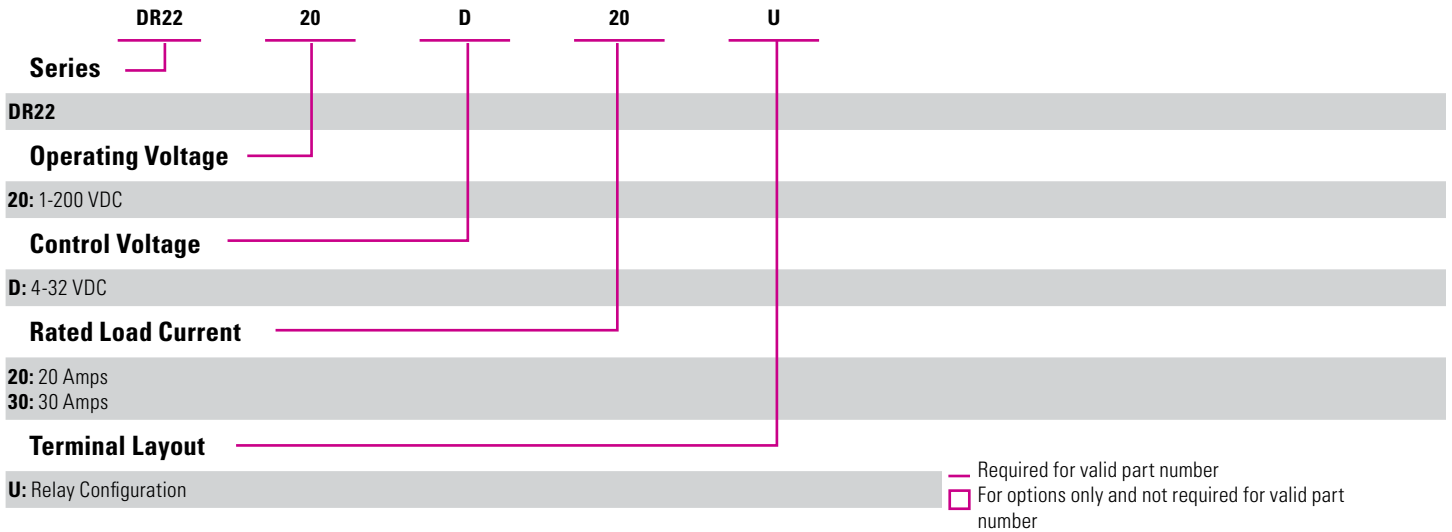


## GENERAL NOTES

- (1) All parameters at 25°C unless otherwise specified.
- (2) Low current loads and high ambient temperature can affect turn-on time.
- (3) 8 VDC Minimum control voltage. Resistive loads only. Consider switching losses; at maximum frequency reduce to 75% output current. Recommended suppressor diode connected at load side, see wiring diagram.
- (4) Increase minimum voltage by 1 V for operations from -20 to -40°C.
- (5) Minimum spacing to obtain max. current is 22.5mm between adjacent units.



## ACCESSORIES

### Recommended Accessories



#### ID Marker

CNLB  
CNLN  
CNL2

# AGENCY APPROVALS & CERTIFICATIONS

Certification in accordance with:  
 United States Standard for Industrial Control Equipment - UL 508 and  
 Canadian Standard Association for Industrial Control Equipment – C22.2 No. 14.



Electromagnetic Compatibility				
Generic Standard	Inmunity Tests	Test Specification Level		Performance
IEC 61000-6-2 Immunity for Industrial Environments	Electrostatic Discharge IEC 61000-4-2	4kV air discharge		Criterion A
		4kV contact discharge		Criterion A
	Fast transients (burst) IEC 61000-4-4	Output	2kV, 5kHz, 100kHz	Criterion B
		Input	1kV, 5kHz, 100kHz	Criterion B
	Surge IEC 61000-4-5	Output	1kV Line to Earth	Criterion B
			2kV Line to Earth	Criterion B

## WARNINGS



### RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool before touching
  - Follow proper mounting instructions including torque values
  - Do not allow liquids or foreign objects to enter this product
- Failure to follow these instructions can result in serious injury, or equipment damage.**



### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before installing or working with this equipment
  - Verify all connections and replace all covers before turning on power
- Failure to follow these instructions will result in death or serious injury.**

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

## CONTACT US

### Americas

+1 (877) 502 5500  
[sales.crydom@sensata.com](mailto:sales.crydom@sensata.com)  
**Europe, Middle East & Africa**  
 +44 (1202) 416170  
[ssr-info.eu@sensata.com](mailto:ssr-info.eu@sensata.com)

### Asia Pacific

[sales.isasia@list.sensata.com](mailto:sales.isasia@list.sensata.com)  
 China +86 (21) 2306 1500  
 Japan +81 (45) 277 7117  
 Korea +82 (31) 601 2004  
 India +91 (80) 67920890  
 Rest of Asia +886 (2) 27602006  
 ext 2808

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Sensata:](#)

[DR2220D20U](#) [DR2220D30U](#)