FO-55111-A

HONEYWELL PART NUMBER
41SM28-T2
PRODUCT CODE TYC2517

REV	DOCUMENT	CHANGED BY	CHECK
3	0038112	KVS 04JUN08	ASD

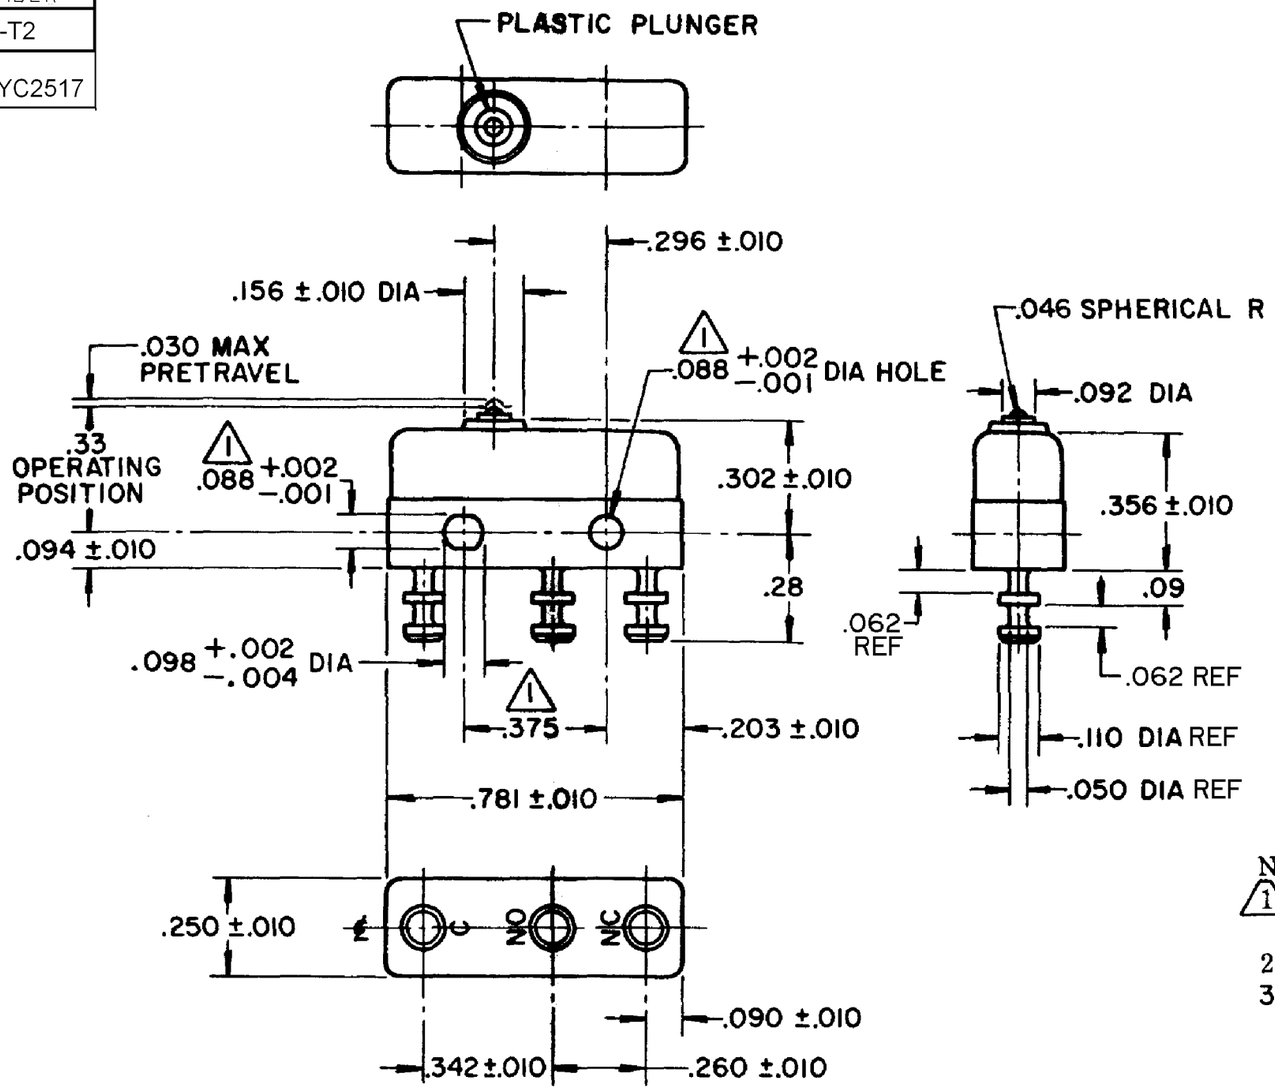

NOTES

1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
2. TERMINALS ARE PLATED FOR SOLDERING
3. SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	PR - 16501
REPLACES	X88855 - SM

CHARACTERISTICS	
OPERATING FORCE	3 – 5 OZ
RELEASE FORCE	1 OZ MIN
DIFFERENTIAL TRAVEL	.003 MAX
OVERTRAVEL	.005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

APPROVALS			
	KEMA, CE	11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4	
	UL, CSA	11A 1/4 HP 125 250 VAC 5A 30 VDC	BRAND L190

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	-
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-

THIRD ANGLE PROJECTION

DRAWN	VK	25 OCT 07
CHECK	RJ	25 OCT 07

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

RASTER

Honeywell

TITLE
SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	1	41SM28-T2	3
SCALE -		WEIGHT .006 LB MAX	SHEET 1 OF 1

Downloaded from Arrow.com.