

# GXL Series

- Long-Life version of GXE series
- For automobile modules and other high temperature applications
- Endurance with ripple current : 5,000 hours at 125°C
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

GXL

Longer life  
GXE P189




## SPECIFICATIONS

Items	Characteristics					
Category	-40 to +125°C					
Temperature Range	-40 to +125°C					
Rated Voltage Range	10 to 50V <sub>dc</sub>					
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)					
Leakage Current	I=0.03CV or 4μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C, 1 minute)					
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	10V	16V	25V	35V	50V
	tanδ (Max.)	0.20	0.16	0.14	0.12	0.10
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> )	10V	16V	25V	35V	50V
	Z(-25°C)/Z(+20°C)	3	2	2	2	2
	Z(-40°C)/Z(+20°C)	6	4	4	4	4
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 5,000 hours at 125°C.					
	Capacitance change	≤±30% of the initial value				
	D.F. (tanδ)	≤300% of the initial specified value				
	Leakage current	≤The initial specified value				
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.					
	Capacitance change	≤±30% of the initial value				
	D.F. (tanδ)	≤300% of the initial specified value				
	Leakage current	≤The initial specified value				


## DIMENSIONS [mm]

- Terminal Code : E

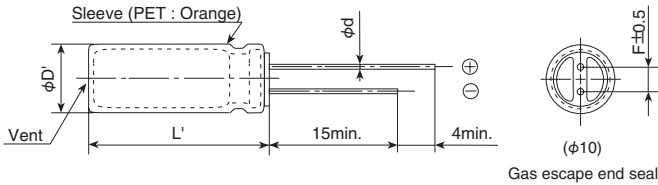

φD	10
φd	0.6
F	5.0
φD'	φD+0.5max.
L'	L+1.5max.

## PART NUMBERING SYSTEM

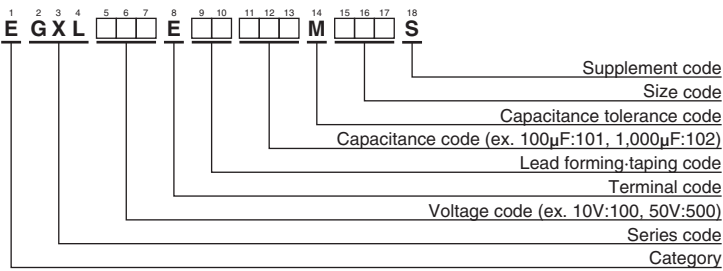

Please refer to "Product code guide (radial lead type)"

**GXL**Series

◆STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap (μF)	Case size φD×L(mm)	Impedance (Ω <sub>max</sub> /20°C, 100kHz)	Rated ripple current (mA <sub>rms</sub> /125°C, 100kHz)	Part No.
10	330	10 × 12.5	0.17	800	EGXL100E□□331MJC5S
	470	10 × 12.5	0.17	800	EGXL100E□□471MJC5S
	1,000	10 × 20	0.094	1,300	EGXL100E□□102MJ20S
16	220	10 × 12.5	0.17	800	EGXL160E□□221MJC5S
	330	10 × 12.5	0.17	800	EGXL160E□□331MJC5S
	470	10 × 16	0.12	1,050	EGXL160E□□471MJ16S
25	220	10 × 12.5	0.17	800	EGXL250E□□221MJC5S
	330	10 × 16	0.12	1,050	EGXL250E□□331MJ16S
	470	10 × 20	0.094	1,300	EGXL250E□□471MJ20S
35	100	10 × 12.5	0.17	800	EGXL350E□□101MJC5S
	220	10 × 16	0.12	1,050	EGXL350E□□221MJ16S
	330	10 × 20	0.094	1,300	EGXL350E□□331MJ20S
50	100	10 × 12.5	0.30	590	EGXL500E□□101MJC5S
	220	10 × 20	0.19	970	EGXL500E□□221MJ20S

□□ : Enter the appropriate lead forming or taping code.

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Capacitance(μF) \ Frequency(Hz)	120	1k	10k	100k
100	0.40	0.75	0.90	1.00
220 to 470	0.50	0.85	0.94	1.00
1,000	0.60	0.87	0.95	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## [United Chemi-Con \(UCC\):](#)

[EGXL350EC3331MJ20S](#) [EGXL350ELL331MJ20S](#) [EGXL350ELL221MJ16S](#) [EGXL350ELL101MJC5S](#)  
[EGXL100ELL102MJ20S](#) [EGXL100EC3102MJ20S](#) [EGXL100ELL471MJC5S](#) [EGXL100ETD102MJ20S](#)  
[EGXL160EC5331MJC5S](#) [EGXL160ELL221MJC5S](#) [EGXL160ELL331MJC5S](#) [EGXL160ELL471MJ16S](#)  
[EGXL160ETD221MJC5S](#) [EGXL160ETD471MJ16S](#) [EGXL250EC3471MJ20S](#) [EGXL250EC5221MJC5S](#)  
[EGXL250EC5331MJ16S](#) [EGXL250ELL221MJC5S](#) [EGXL250ELL271MJC5S](#) [EGXL250ELL331MJ16S](#)  
[EGXL250ELL471MJ20S](#) [EGXL250ETD221MJC5S](#) [EGXL250ETD331MJ16S](#) [EGXL250ETD471MJ20S](#)  
[EGXL350EC3101MJC5S](#) [EGXL350EMC101MJC5S](#) [EGXL350ETD101MJC5S](#) [EGXL350ETD221MJ16S](#)  
[EGXL350ETD331MJ20S](#) [EGXL500EBC221MJ20S](#) [EGXL500EC3101MJC5S](#) [EGXL500EC3221MJ20S](#)  
[EGXL500EC5101MJC5S](#) [EGXL500EC5221MJ20S](#) [EGXL500ELL101MJC5S](#) [EGXL500ELL221MJ20S](#)  
[EGXL500ETD101MJC5S](#) [EGXL500ETD221MJ20S](#) [EGXL500ELL471MK25S](#)