

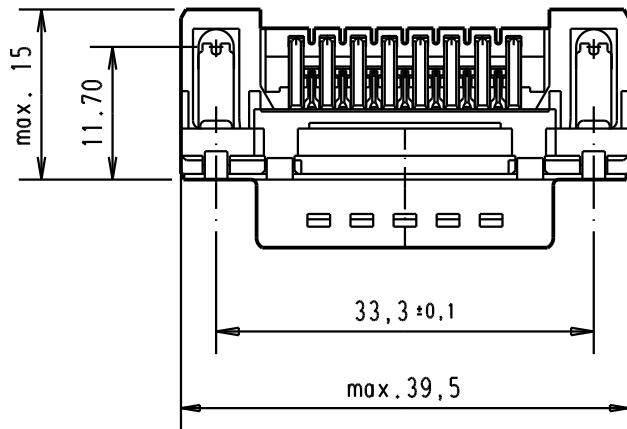
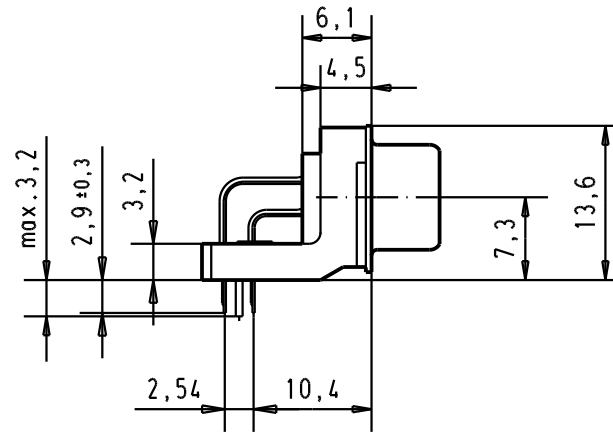


5 4 3 2 1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

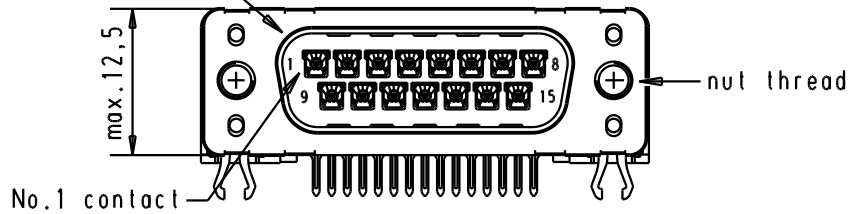

PCB layout hole component side

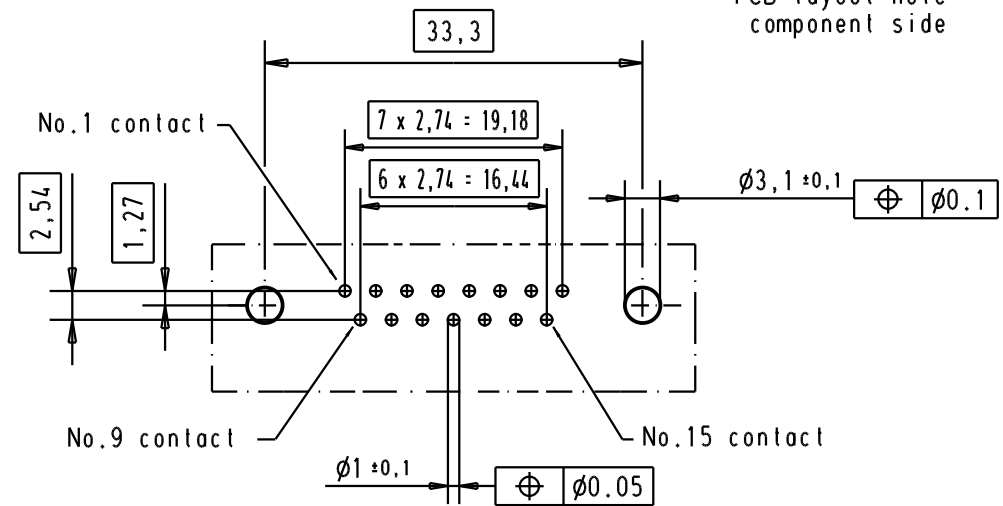

Connector retention and insertion forces on the PCB = 25 / 80 newtons

09 65 262 3811	M3	1																		
09 65 262 6811	M3	2																		
09 65 262 7811	M3	3	31892	22/04/04	JH	Detail.	15/dec/00	ALSPACE												
09 65 262 3812	4-40 UNC	1	31084	04/09/02	YT	Insp.														
09 65 262 6812	4-40 UNC	2	29689	02/07/01	AA	Stand.														
09 65 262 7812	4-40 UNC	3	27960	15/dec/00	ALSPACE															
Part number	Nut thread	Performance level	Mod.	Dat.	Name															

All Dim. in mm
Orig. Size DIN A 4

HARTING

Moßstab/
Scale

1.5:1

D-Sub, male, standard angle,
15 poles, with solder pin,
nut and grounding board lock

TB 0965262x81x

Sub.

Blatt/ Page

5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09652626811](#) [09652626812](#) [09652627811](#) [09652627812](#)