THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E4	ECR–17–009069	12FEB2018	SG	MKO

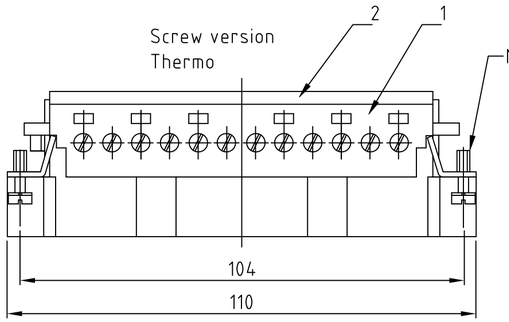



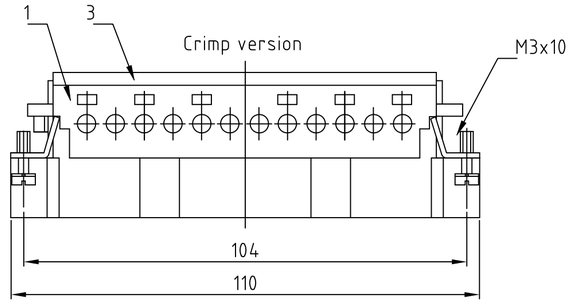

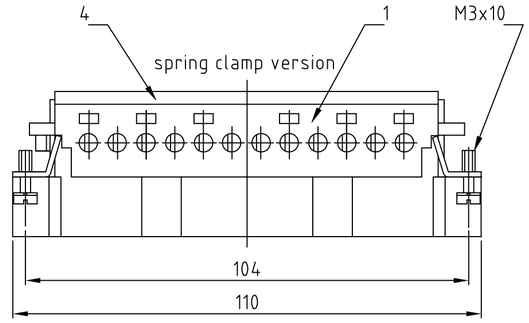



Contact arrangement view from termination side

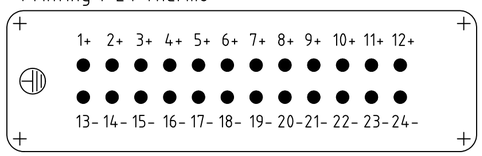

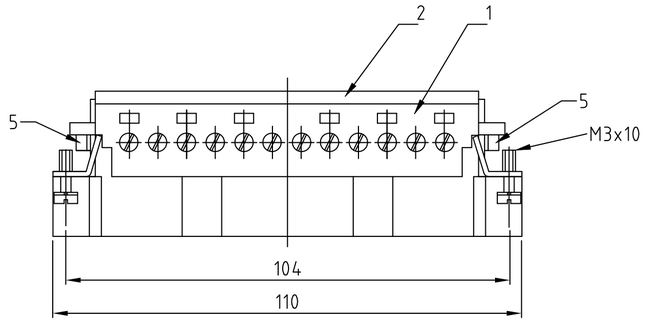

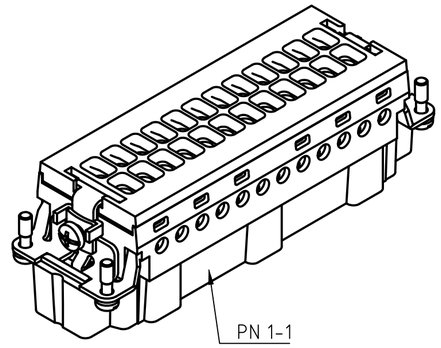

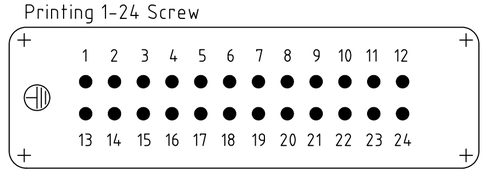

Panel cut-out for contact insert when used without housing

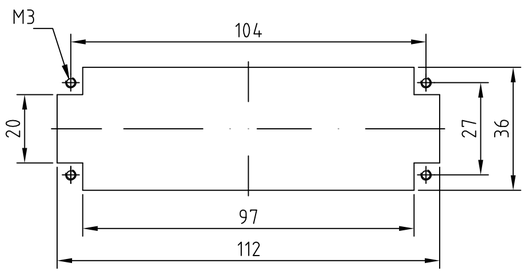

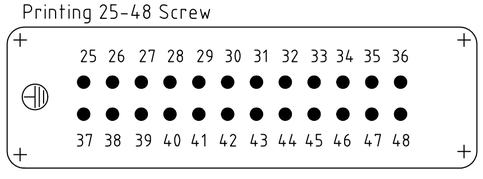

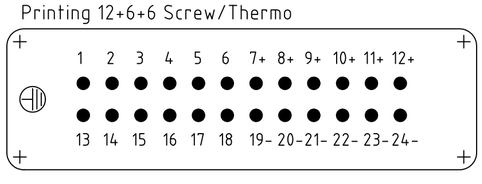

NOTES:

1 SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. ø3,2 MM

2 SUITABLE HOOD SIZE 8; 12: SERIES HB; HD; HIP; EMV
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264

3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm

4 STANDARDS:
DIN EN 61984; DIN EN 60664-1

5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED

6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 220 PIECES

1-2	0-1	9-3	1-8	9-5	9-4	7-9	7-1	2-9	2-3	1-9	1-7	1-1	DESCRIPTION	MATERIAL	COLOR / FARBE	ITEM NO. POS.	NOTES
												2	cylinder screw	steel	blue	5	M4x6
		1				1	1						cover spring clamp version		light grey	4	
								1	1				cover crimp version		light grey	3	
1	1		1	1	1					1	1	1	cover screw version		light grey	2	
1	1	1	1	1	1	1	1	1	1	1	1	1	pin insert		light grey	1	
OBSOLETE	OBSOLETE			OBSOLETE	SUPERSEDED BY T2040483101-000	SUPERSEDED BY T2040243101-000				OBSOLETE							
HE.24.STI.S.B1-24+2ES	HE.24.STI.S.B1-24-KM	HE.24.STI.SC-AUB1-24	HE.24.STI.S.B-T 12+6+6	HE.24.STI.S-AUB1-24	HE.24.STI.S-AUB25-48	HE.24.STI.SC.B25-48	HE.24.STI.SC.B1-24	HE.24.STI.C.B25-48	HE.24.STI.C.B1-24	HE.24.STI.S.B25-48	HE.24.STI.S-T.B1-24	HE.24.STI.S.B1-24					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ISO 2768 DIN 2768 n. ISO 2768 n. DIN 16901 – m-K

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL –
FINISH –

DWN Schneider 08.02.2000
CHK Schweiger 08.02.2000
APVD –
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT

TE Connectivity

NAME Male insert
HE.24.STI.S/C
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1103640	–

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV E4

1103640

1471–9 (1/15)