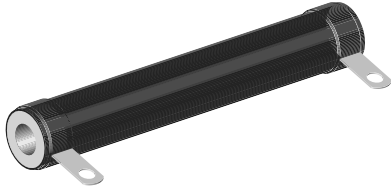


## Wirewound Resistor, Industrial Power, Silicone Coated, Fixed Tubular


**FEATURES**

- High temperature silicone coating
- Complete welded construction
- Available in non-inductive style (special “NI”) with Ayrton-Perry winding
- Tight tolerance of 5 % for values above 1 Ω
- Excellent stability in operation (< 3 % change resistance)
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


**STANDARD ELECTRICAL SPECIFICATIONS**

GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{25\text{ }^{\circ}\text{C}}$ W	RESISTANCE RANGE $\Omega$ $\pm 5\%$	RESISTANCE RANGE $\Omega$ $\pm 10\%$	WEIGHT (typical) g
FST005	FST-5	5	1.0 to 20.5K	0.1 to 20.5K	4.60
FST005...NI	FST-5-...-NI	5	1.0 to 750	1.0 to 750	4.60
FST010	FST-10	12	1.0 to 58K	0.1 to 58K	6.7
FST010...NI	FST-10-...-NI	12	1.0 to 3.9K	1.0 to 3.9K	6.7
FST20A	HL-15	15	1.0 to 60K	0.10 to 60K	8.64
FST020	FST-20	20	1.0 to 95K	0.1 to 95K	12.57
FST020...NI	FST-20-...-NI	20	1.0 to 6.8K	1.0 to 6.8K	12.57
FST025	FST-25	25	1.0 to 115K	0.1 to 115K	20.7
FST025...NI	FST-25-...-NI	25	1.0 to 8.8K	1.0 to 8.8K	20.7
FST25A	FST-25A	30	1.0 to 56K	0.1 to 56K	20.7
FST25A...NI	FST-25A-...-NI	30	1.0 to 7.25K	1.0 to 7.25K	20.7
FST25B	FST-25B	30	1.0 to 49K	0.1 to 49K	14.5
FST25B...NI	FST-25B-...-NI	30	1.0 to 6.8K	1.0 to 6.8K	14.5
FST050	FST-50	50	1.0 to 112K	0.1 to 112K	42.1
FST050...NI	FST-50-...-NI	50	1.0 to 21.5K	1.0 to 21.5K	42.1
FST50A	FST-50A	60	1.0 to 145K	0.1 to 145K	65.6
FST50A...NI	FST-50A-...-NI	60	1.0 to 27.2K	1.0 to 27.2K	65.6
FST50B	FST-50B	70	1.0 to 170K	0.1 to 170K	60.0
FST50B...NI	FST-50B-...-NI	70	1.0 to 31.4K	1.0 to 31.4K	60.0
FST075	FST-75	75	1.0 to 276K	0.1 to 276K	98.5
FST075...NI	FST-75-...-NI	75	1.0 to 35K	1.0 to 35K	98.5
FST75A	FST-75A	90	1.0 to 238K	0.1 to 238K	64.8
FST75A...NI	FST-75A-...-NI	90	1.0 to 31K	1.0 to 31K	64.8
FST080	HL-80	80	1.0 to 190K	0.10 to 190K	121.58
FST100	FST-100	100	1.0 to 260K	0.1 to 260K	91.4
FST100...NI	FST-100-...-NI	100	1.0 to 48.5K	1.0 to 48.5K	91.4
FST130	FST-130	130	1.0 to 380K	0.1 to 380K	192.4
FST130...NI	FST-130-...-NI	130	1.0 to 70.2K	1.0 to 70.2K	192.4
FST160	FST-160	175	1.0 to 470K	0.1 to 470K	250.8
FST160...NI	FST-160-...-NI	175	1.0 to 105K	1.0 to 105K	250.8
FST175	HL-175	175	1.0 to 500K	0.10 to 500K	250.8
FST200	FST-200	225	1.0 to 645K	0.1 to 645K	310.0
FST200...NI	FST-200-...-NI	225	1.0 to 121K	1.0 to 121K	310.0
FST225	FST-225	225	1.0 to 645K	0.1 to 645K	310.0
FST225...NI	FST-225-...-NI	225	1.0 to 121K	1.0 to 121K	310.0



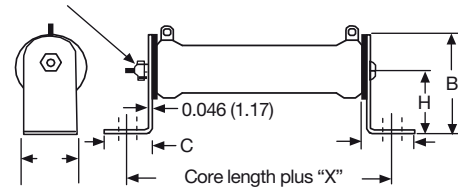
GLOBAL PART NUMBER INFORMATION																	
Global Part Numbering example: <b>FST02506E25R00JE</b> (visit <a href="http://www.vishay.net">www.vishay.net</a> SAP parts manual for all options)																	
<b>F</b>	<b>S</b>	<b>T</b>	<b>0</b>	<b>2</b>	<b>5</b>	<b>0</b>	<b>6</b>	<b>E</b>	<b>2</b>	<b>5</b>	<b>R</b>	<b>0</b>	<b>0</b>	<b>J</b>	<b>E</b>		
GLOBAL MODEL (6 digits)	TERMINAL DESIGNATION (2 digits)	TERMINAL FINISH (1 digit)	VALUE (5 digits)	TOLERANCE (1 digit)	PACKAGING CODE (1 digit)	SPECIAL (up to 2 digits)											
(see Standard Electrical Specifications Global Model column for options)	<b>02, 05, 06, 14, 15, 20</b> <b>FC</b> = ferrule cap	<b>E</b> = lead (Pb)-free	<b>R</b> = decimal <b>K</b> = thousand <b>1R500</b> = 1.5 Ω <b>1K500</b> = 1.5 kΩ	<b>J</b> = ± 5 % <b>K</b> = ± 10 %	<b>E</b> = lead (Pb)-free bulk pack	(dash number) from <b>1</b> to <b>99</b> as applicable <b>91</b> = 100 style horizontal high bracket <b>92</b> = 200 style push-in bracket <b>93</b> = 300 style thru-bolt bracket <b>CT</b> = center tap <b>NI</b> = non-inductive <b>NP</b> = non-inductive + 92 style push-in bracket <b>NH</b> = non-inductive + 91 style horizontal bracket <b>NV</b> = non-inductive + style vertical bracket											
Historical Part Number example: <b>FST-25-25-5 %</b>																	
<b>FST-25</b>	<b>25 Ω</b>	<b>5 %</b>															
HISTORICAL MODEL	RESISTANCE VALUE	TOLERANCE				SPECIAL											

DIMENSIONS in inches (millimeters)									
MODEL	A MAX.	CORE DIMENSIONS			TERMINAL SETBACK ± 0.031 (0.79)	DISTANCE CENTER TO CENTER (REF.)	TERMINAL DESIGNATION		
		LENGTH	O.D. ± 0.031 (0.79)	I.D. ± 0.031 (0.79)			STANDARD	OPTIONAL (QUICK CONNECT)	
FST005	0.406 (10.31)	1.000 (25.40)	0.313 (7.95)	0.188 (4.78)	0.094 (2.39)	0.625 (15.88)	05	14	
FST010	0.406 (10.31)	1.750 (44.45)	0.313 (7.95)	0.188 (4.78)	0.094 (2.39)	1.375 (34.93)	05	14	
FST020	0.563 (14.30)	2.000 (50.8)	0.438 (11.13)	0.260 (6.60)	0.094 (2.39)	1.625 (41.28)	02	14	
FST20A	0.563 (14.30)	1.500 (38.10)	0.438 (11.11)	0.313 (7.94)	0.094 (2.38)	0.937 (23.80)	02	14	
FST025	0.688 (17.48)	2.000 (50.8)	0.563 (14.30)	0.313 (7.95)	0.094 (2.39)	1.562 (39.67)	06	15	
FST25A	0.906 (23.01)	2.000 (50.8)	0.750 (19.05)	0.500 (12.70)	0.094 (2.39)	1.562 (39.67)	06	15	
FST25B	0.770 (19.56)	2.000 (50.8)	0.625 (15.88)	0.453 (11.51)	0.094 (2.39)	1.562 (39.67)	06	15	
FST050	0.688 (17.48)	4.000 (101.6)	0.563 (14.30)	0.313 (7.95)	0.094 (2.39)	3.562 (90.47)	06	15	
FST50A	0.906 (23.01)	4.000 (101.6)	0.750 (19.05)	0.500 (12.70)	0.062 (1.57)	3.626 (92.10)	06	15	
FST50B	0.906 (23.01)	4.500 (114.3)	0.750 (19.05)	0.547 (13.89)	0.125 (3.18)	4.000 (101.60)	06	15	
FST075	0.688 (17.48)	6.000 (152.4)	0.563 (14.30)	0.313 (7.95)	0.094 (2.39)	5.562 (141.27)	06	15	
FST75A	0.906 (23.01)	6.000 (152.4)	0.750 (19.05)	0.500 (12.70)	0.094 (2.39)	5.562 (141.27)	06	15	
FST080	1.313 (33.34)	4.000 (101.6)	1.125 (28.58)	0.750 (19.05)	0.219 (5.56)	2.812 (71.42)	20	15	
FST100	0.906 (23.01)	6.500 (165.1)	0.750 (19.05)	0.500 (12.70)	0.125 (3.18)	6.000 (152.40)	06	15	
FST130	1.313 (33.35)	6.500 (165.1)	1.125 (28.58)	0.750 (19.05)	0.282 (7.16)	5.374 (136.50)	20	15	
FST160	1.313 (33.35)	8.500 (215.9)	1.125 (28.58)	0.750 (19.05)	0.267 (6.78)	7.404 (188.06)	20	15	
FST175	1.313 (33.34)	8.500 (215.9)	1.125 (28.58)	0.750 (19.05)	0.219 (5.56)	7.312 (185.72)	20	15	
FST200 FST225	1.313 (33.35)	10.500 (266.7)	1.125 (28.58)	0.750 (19.05)	0.266 (6.76)	9.406 (238.91)	20	15	

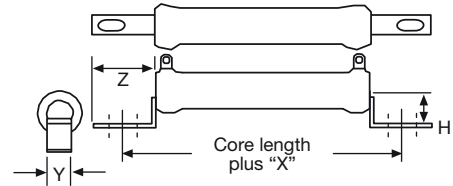
TERMINAL DIMENSIONS in inches (millimeters)							
	DIMENSIONS	TERMINAL STYLE					
		20	02	05	06	14	15
	WIDTH A	0.375 (9.53)	0.188 (4.76)	0.188 (4.76)	0.250 (6.35)	0.188 (4.76)	0.250 (6.35)
	HEIGHT B	0.562 (14.07)	0.393 (9.98)	0.393 (9.98)	0.500 (12.70)	0.563 (14.29)	0.594 (15.08)
	DIAMETER C	0.204 (5.18)	0.133 (3.38)	0.133 (3.38)	0.172 (4.36)	0.050 (1.27)	0.065 (1.65)
THICKNESS D	0.020 (0.51)	0.020 (0.51)	0.020 (0.51)	0.020 (0.51)	0.020 (0.51)	0.031 (0.79)	

MOUNTING HARDWARE			
GLOBAL MODEL	AVAILABLE BRACKET TYPES BY MODEL		
	91 = 100 STYLE HORIZONTAL 1 HIGH BRACKET	92 = 200 STYLE PUSH-IN BRACKET	93 = 300 STYLE THRU-BOLT BRACKET
FST005	n/a	202	n/a
FST010	101	202	301
FST020	101	203	301
FST20A	101	203	301
FST025	102	204	301
FST25A	102	206	302
FST25B	102	205	301
FST050	102	204	302
FST50A	102	206	302
FST50B	102	208	302
FST075	102	204	301
FST75A	102	206	302
FST100	102	206	302
FST130	103	207	302
FST175	103	207	303
FST200	103	207	303
FST225	103	207	303

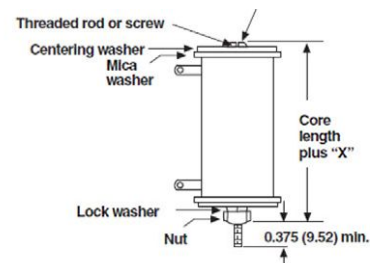
**DIMENSIONS** in inches (millimeters)

**91 = 100 Style Horizontal 1 High Bracket**


BRACKET TYPE	X	Y	Z	H	MOUNTING SLOT	C	B
101	1.063 (26.99)	0.500 (12.70)	0.950 (24.13)	1.000 (25.40)	0.219 x 0.438 (5.56 x 11.11)	0.750 (19.05)	1.375 (34.93)
102	1.063 (26.99)	0.750 (19.05)	0.859 (21.83)	1.250 (31.75)	0.219 x 0.438 (5.56 x 11.11)	0.750 (19.05)	1.750 (44.45)
103	1.063 (26.99)	1.250 (31.75)	1.000 (25.40)	1.500 (38.10)	0.281 x 0.563 (7.14 x 14.29)	0.927 (23.55)	2.125 (53.98)

**92 = 200 Style Push-In Bracket**


BRACKET TYPE	X	H	Y	Z	HOLE (DIA.)
202	0.478 (12.14)	0.250 (6.35)	0.125 (3.175)	0.375 (9.53)	0.170 (4.32)
203	0.583 (14.80)	0.580 (14.73)	0.188 (4.78)	0.460 (11.68)	0.115 (2.92)
204	0.700 (17.78)	0.578 (14.68)	0.250 (6.35)	0.500 (12.70)	0.156 (3.96)
205	0.846 (21.49)	0.800 (20.32)	0.375 (9.53)	0.600 (15.24)	0.343 x 0.213 (8.71 x 5.46)
206	0.846 (21.49)	0.800 (20.62)	0.375 (9.53)	0.600 (15.24)	0.343 x 0.213 (8.71 x 5.46)
207	0.700 (17.78)	1.125 (28.58)	0.500 (12.70)	0.687 (17.45)	0.250 x 0.188 (6.35 x 4.78)
208	0.846 (21.49)	0.800 (20.62)	0.375 (9.53)	0.600 (15.24)	0.343 x 0.213 (8.71 x 5.46)

**93 = 300 Style Thru-Bolt Bracket**


BRACKET TYPE	X (APPROXIMATE)	THREAD
301	0.373 (9.47)	8 to 32
302	0.271 (6.88)	8 to 32
303	0.463 (11.76)	1/4 to 20

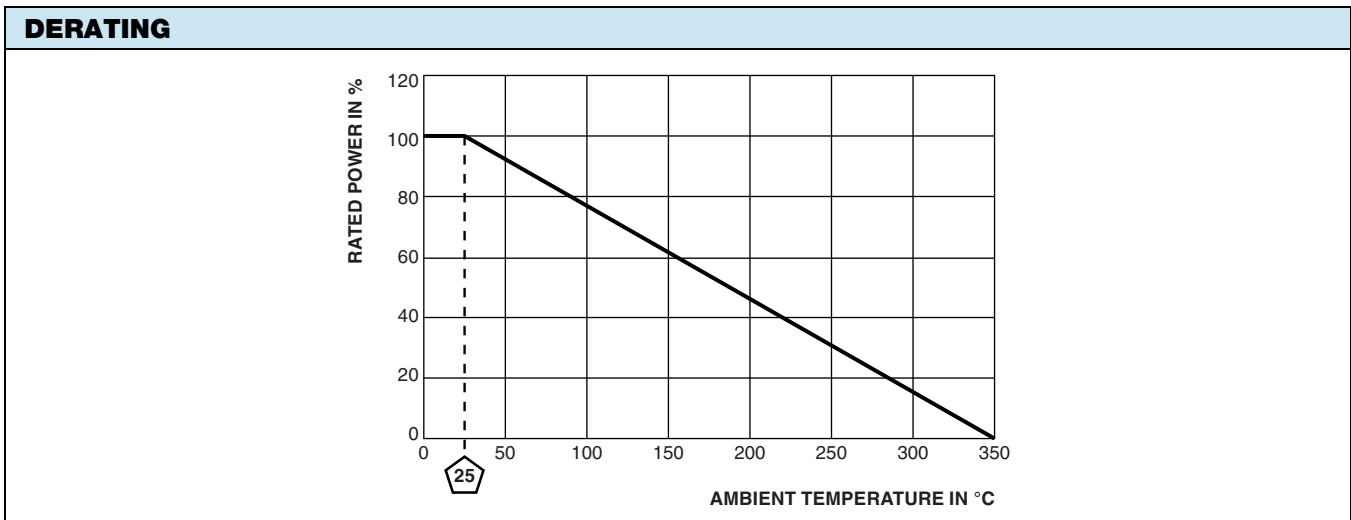


TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	RESISTOR CHARACTERISTICS
Power Rating	W	5 to 225
Resistance Range	$\Omega$	0.1 to 645K
Resistance Tolerance	%	5
Temperature Coefficient	ppm/ $^{\circ}$ C	$\pm 260$ for 20 $\Omega$ and above, $\pm 400$ for 1 $\Omega$ to 19.99 $\Omega$
Operating Temperature	$^{\circ}$ C	-55 $^{\circ}$ C to 350 $^{\circ}$ C
Temperature Rise	$^{\circ}$ C	325 $^{\circ}$ C above an ambient of 25 $^{\circ}$ C
Maximum Altitude	f.a.s.l.	10 000
Short-Term Overload	-	10x rated power for 5 s
Surge Windings		Available
Maximum Working Voltage	-	$(P \times R)^{0.5}$
Insulation Resistance	$\Omega$	1M
Dielectric Voltage	V <sub>RMS</sub>	1000 V <sub>AC</sub>
Creepage		Varies by wattage, see "Terminal Setback" in Dimensions table
Terminal Sleeves		n/a
Inductance	$\mu$ H	Varies by wattage and resistance
Non-Inductive Winding		Available
Terminal Strength	lb	10 lbs
Electrical or Mechanical Customization		Contact factory: <a href="mailto:ww2dresistors@vishay.com">ww2dresistors@vishay.com</a>

MATERIAL SPECIFICATIONS	
Element	Copper-nickel alloy or nickel-chrome alloy, depending on resistance value
Core	Cordierite, steatite
Coating	Special high temperature silicone
Standard Terminals	Tinned alloy 42
Optional Terminals	Alloy 42
Terminal Bands	Alloy 42
Part Marking	HEI, model, wattage, value, tolerance, date code

**NON-INDUCTIVE**

Models of equivalent physical and electrical specifications are available with non-inductive (Ayrton-Perry) winding. They are identified by adding the letters "NI" to the end of the part number in the special section. For non-inductive models the maximum resistance values are lower, see Standard Electrical Specifications table.





## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Vishay:

[FST50A06E2R500JE](#) [FST50B06E50K00JE](#) [FST10006E6R000JE](#) [FST05006E25R00JE](#) [FST22520E300R0JE](#)  
[FST10006E25R00JE](#) [FST10006E10R00JE](#) [FST05006E1R000JE](#) [FST02506E10R00JE](#) [FST02506E400R0JE](#)  
[FST05006E300R0JE](#) [FST10006E1R000JE](#) [FST10006E1K000JE](#) [FST05006E50K00JE](#) [FST02506E5R000JE](#)  
[FST02506E15R00JE](#) [FST02506E20K00JE](#) [FST02506E100R0JE](#) [FST02506E1R000JE](#) [FST02506E25R00JE](#)  
[FST05006E50R00JE](#) [FST22520E1R000JE](#) [FST02506E1K500JE](#) [FST02506E200R0JE](#) [FST02506E10K00JE](#)  
[FST02506E300R0JE](#) [FST02506E2K500JE](#) [FST02506E30R00JENI](#) [FST02506E15K00JE](#) [FST01005E10R00JE](#)  
[FST01005E25R00JE](#) [FST02506E4R000JE](#) [FST02506E500R0JE](#) [FST10006E2K500JE](#) [FST02506E7K500JE](#)  
[FST02506E50K00JE](#) [FST22520E100R0JE](#) [FST05006E50R00JENI](#) [FST02506E1K000JE](#) [FST01005E100R0JE](#)  
[FST02506E250R0JE](#) [FST01005E400R0JE](#) [FST01005E25K00JE](#) [FST22520E2K500JE](#) [FST05006E25R00JENI](#)  
[FST17520E200R0JENI](#) [FST10006E750R0JE](#) [FST05006E100R0JE](#) [FST05006E10R00JENI](#) [FST22520E1K000JE](#)  
[FST05006E3K000JE](#) [FST10006E100R0JE](#) [FST10006E75R00JE](#) [FST22520E18R00JE](#) [FST05006E5K000JE](#)  
[FST10006E10K00JE](#) [FST05006E400R0JENI](#) [FST10006E150R0JE](#) [FST10006E11R00JE](#) [FST10006E30R00JE](#)  
[FST22520E10K00JE](#) [FST05006E250R0JE](#) [FST10006E15R00JE](#) [FST10006E6R500JE](#) [FST10006E20K00JE](#)  
[FST10006E15K00JE](#) [FST10006E75K00JE](#) [FST17520E100R0JENI](#) [FST22520E25R00JE](#) [FST05006E75R00JE](#)  
[FST05006E2K000JE](#) [FST22520E100K0JE](#) [FST05006E150R0JE](#) [FST22520E25K00JE](#) [FST17520E1K000JENI](#)  
[FST22520E500R0JE](#) [FST10006E25R00JENI](#) [FST05015E25R00JE](#) [FST02506E35R00JE](#) [FST05006E7R500JE](#)  
[FST05006E3R000JE](#) [FST05006E500R0JE](#) [FST01005E300R0JE](#) [FST02506E7R500JE](#) [FST08020E30R00FECT](#)  
[FST05006E470R0JE](#) [FST02506E150R0JE](#) [FST22520E25R00JENI](#) [FST01005E2K500JE](#) [FST01005E150R0JE](#)  
[FST01005E250R0JE](#) [FST01005E500R0JE](#) [FST01005E1K000JE](#) [FST01005E3K000JE](#) [FST08020E25R00JE](#)  
[FST10006E50R00JE](#) [FST22520E75R00JE](#) [FST17520E10R00JENI](#) [FST22520E200R0JE](#) [FST10006E100R0JENI](#)