

Miniature Fuse, 5 x 20 mm, Medium-Time-Lag M, 250 VAC



250 VAC · Medium-Time-Lag M

See below:  
[Approvals and Compliances](#)


**Description**

- Low and Medium Breaking Capacity

**Weblinks**

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

**Technical Data**

Rated Voltage	250 VAC, 125 VDC
Rated current	0.315 - 10A
Breaking Capacity	80A - 1000A
Characteristic	Medium-Time-Lag M
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Tube	Glass / Ceramic
Material: Endcaps	Nickel-Plated Copper Alloy
Unit Weight	0.92 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 , Rated current, Rated Voltage, Characteristic

**Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.





**Application standards**

Application standards where the product can be used


Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 62368-1	IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment.

**Compliances**

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	<a href="#">CE declaration of conformity</a>	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


Dimension [mm] 

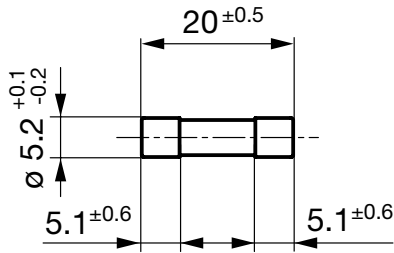

**Pre-Arcing Time**

Rated Current $I_n$	1.5 x $I_n$ min.	2.1 x $I_n$ max.	4.0 x $I_n$ min.	4.0 x $I_n$ max.	10.0 x $I_n$ min.	10.0 x $I_n$ max.
0.315 A - 1.25 A	60 min	10 min	40 ms	2 s	5 ms	90 ms
1.6 A - 10 A	60 min	30 min	40 ms	2 s	5 ms	90 ms

**Time-Current-Curves**

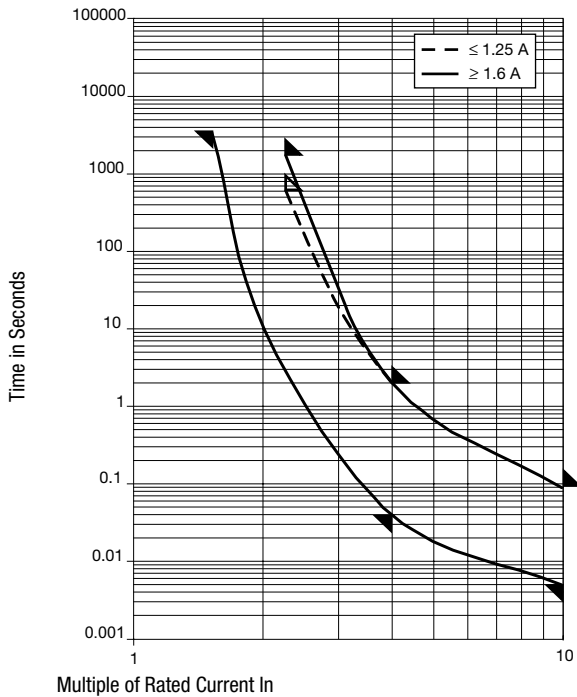

**All Variants**

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 $I_n$ max. [mV]	Voltage Drop 1.0 $I_n$ typ. [mV]	Power Dissipation 1.5 $I_n$ typ. [mW]	Melting $I^2t$ 10.0 $I_n$ typ. [A <sup>2</sup> s]	Order Number
0.315	250	1)	250	200	200	0.268	0034.2511
0.4	250	1)	230	160	200	0.632	0034.2512
0.5	250	1)	210	140	200	0.675	0034.2513
0.63	250	1)	190	140	200	0.905	0034.2514
0.8	250	1)	170	130	200	1.68	0034.2515
1	250	1)	160	70	200	3.6	0034.2516

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I <sub>n</sub> max. [mV]	Voltage Drop 1.0 I <sub>n</sub> typ. [mV]	Power Dissipation 1.5 I <sub>n</sub> typ. [mW]	Melting I <sup>2</sup> t 10.0 I <sub>n</sub> typ. [A <sup>2</sup> s]	Order Number
1.25	250	1)	160	70	200	5.47	0034.2517
1.6	250	2)	160	150	600	3.33	0034.2518
2	250	2)	160	140	700	4.8	0034.2519
2.5	250	2)	160	130	800	10.9	0034.2520
3.15	250	2)	160	120	1000	20.4	0034.2521
4	250	2)	160	120	1300	35.2	0034.2522
5	250	2)	150	100	1400	52.5	0034.2523
6.3	250	2)	140	100	1700	159	0034.2524
8	250	3)	140	90	2300	237	0034.2525
10	250	3)	120	80	2300	430	0034.2526

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 80 A @ 250 VAC / 80 A @ 125 VDC

2) 1000 A @ 250 VAC / 1000 A @ 125 VDC

3) 300 A @ 250 VAC / 300 A @ 125 VDC

Glass Tube: 0.315 A - 1.25 A

Ceramic Tube: 1.6 A - 10 A

**Packaging Unit**

xxxx.xxxx  
xxxx.xxxx.G

Small Box Pack (10 pcs.)  
Bulk 128 x 91 x 60 mm (1000 pcs.)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Schurter:

[0034.2521](#) [0034.2523](#) [0034.2512](#) [0034.2515](#) [0034.2514](#) [0034.2516](#) [0034.2520](#) [0034.2522](#) [0034.2519](#) [0034.2518](#)  
[0034.2513](#) [0034.2511](#) [0034.2517](#) [0034.2524](#) [0034.2525](#) [0034.2526](#)