


Alcoswitch

TE Internal #: 2351444-6 TE Internal Description: UMINSA SW PPLUN 0.88N 3A/1.5A AC NO PCB

View on TE.com >

Relays, Contactors & Switches > Switches > Snap Action Switches

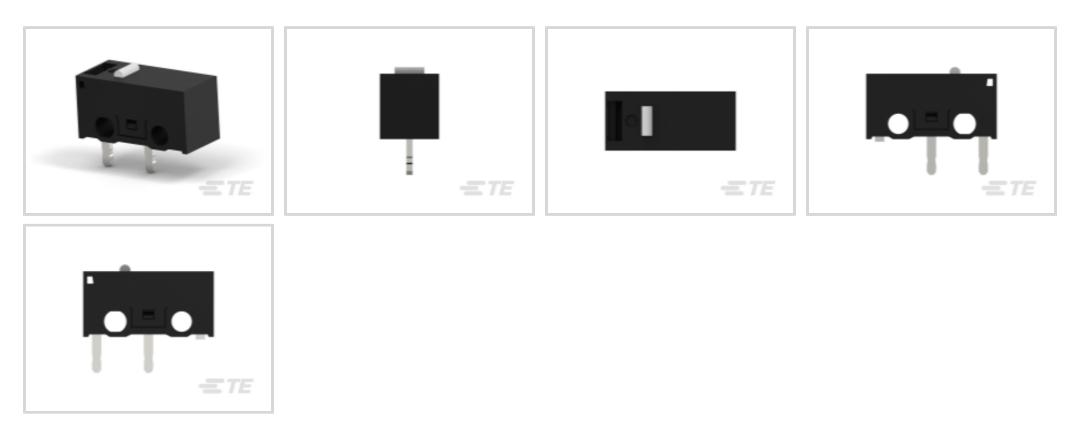

Configuration (Pole-Throw): Single Pole - Single Throw

Actuator Style: Pin Plunger

Contact Current Rating: 3A

Voltage Rating: 125 VAC

Operating Force: 90 g [3.2 oz]

Features

Product Type Features



Product Type	Switch
Switch Type	Snap Action
Actuator Style	Pin Plunger
Switch Style	Ultra Miniature
Configuration Features	
Operating Position	6.9 mm
Configuration (Pole-Throw)	Single Pole - Single Throw
Electrical Characteristics	
Voltage Rating	125 VAC
Body Features	
Movement Differential	.2 mm
Releasing Force	5 g
Contact Features	
Switch Contact Plating Material	Silver

SAJ13XXPP0N88SNOPTQ

UMINSA SW PPLUN 0.88N 3A/1.5A AC NO PCB



Contact Base Material	Ag Alloy
Contact Current Rating	3 A
Termination Features	
Termination Type	Printed Circuit Board
Mechanical Attachment	
Mounting Angle	Vertical
Dimensions	
Pre Travel	.5 mm
Operation/Application	
Operating Force	90 g[3.2 oz]
Other	
Over Travel	.2 mm
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2019 (201) Candidate List Declared Against: JAN 2019 (197) Does not contain REACH SVHC
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2019 (201) Candidate List Declared Against: JAN 2019 (197)
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers and based on the information they provided. This information is subject to change EU RoHS compliant have a maximum concentration of 0.1% by weight in homo chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmit limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished ele	. The part numbers that TE has identified as ogenous materials for lead, hexavalent um, or qualify for an exemption to these

will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous

UMINSA SW PPLUN 0.88N 3A/1.5A AC NO PCB



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



Documents

Product Drawings

UMINSA SW PPLUN 0.88N 3A/1.5A AC NO PCB

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_2351444-6_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2351444-6_A.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_2351444-6_A.3d_stp.zip

English

Datasheets & Catalog Pages SAJ Series Snap Action Switches Data Sheet

English