




## RTD Extension Cable – 4 core PFA Platinum Resistance Thermometer Extension Cable, PFA insulated & screened

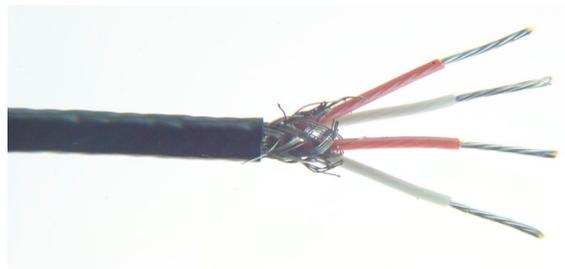

### About Labfacility

Formed in 1971, Labfacility specialize in the field of Temperature and Process Measurement.

We are the largest UK manufacturer of both temperature sensors and thermocouple connectors

### Quality & Service

Quality and Service are key elements in the continued growth of Labfacility.

Technical support is always freely available from our experienced technical sales teams and the company has ISO9001 accreditation.

- ◆ PFA insulated cable for extending Platinum Resistance Thermometers
- ◆ High temperature to 260°C, extruded PFA teflon® construction
- ◆ Commonly used for Pt100Ω thermometers, also suitable with other types such as Pt130, Pt500 & Pt1000Ω
- ◆ 4 core available – to extend 2, 3 or 4 wire RTD configurations
- ◆ Construction – PFA insulated 7/0.2mm tin plated copper conductors, twisted cores with nylon cord, tin plated copper braided screen with PFA insulated outer jacket
- ◆ Cores colour coded Red & White in accordance with IEC-751, black outer jacket
- ◆ Good mechanical strength and flexibility, resistant to oils, acids and other adverse fluids
- ◆ Insulation rating -75°C to 260°C

Type	Conductors	mm <sup>2</sup>	Cores	Screen	Jacket	Reel Length	Manufacturers Part No.	Farnell order code
RTD	7/0.2mm	0.219	x 4	Yes	Black	10 metres	WC-052-D	128-9661
RTD	7/0.2mm	0.219	x 4	Yes	Black	25 metres	WC-052-D	XF-1328-FAR
RTD	7/0.2mm	0.219	x 4	Yes	Black	50 metres	WC-052-D	XF-1327-FAR
RTD	7/0.2mm	0.219	x 4	Yes	Black	100 metres	WC-052-D	XF-1326-FAR

Overall sheath Dimension (approx.)  
4 core = 3.2mmØ

### Contact Details

Email  
sales@labfacility.com

Website  
www.labfacility.com