


Max. Temperature : 260° during 10 seconds



Part number	PL	Thread	Index designation	Mod.	Dot.	Name	Dot.	Name	D-SUB SMT Standard Female 9p with die casted grounds and nuts		Maßstab/ Scale
09551563612.741	1	4-40 UNC	Black Insulator	Reel Packaging (140 connectors) see page 2/2	EC01199	11Jan2010	ED	Detail.	30Jun2006	ED	1,5:1
09551566612.741	2				34398	22Aug2007	ED	Insp.			
09551567612.741	3				33929	25Jan2007	ED	Stand.			
09551563611.741	1	M3	Black Insulator	Reel Packaging (140 connectors) see page 2/2	33785	30Jun2006	ED	HARTING EURL F-95972 Paris		TB 09 55 156 x61x	Blatt/ Page 1 / 2
09551566611.741	2				33773	30Jun2006	ED	HARTING EURL F-95972 Paris			
09551567611.741	3										
				Part number	PL	Thread	Index designation	Mod.	Dot.	Name	Sub.



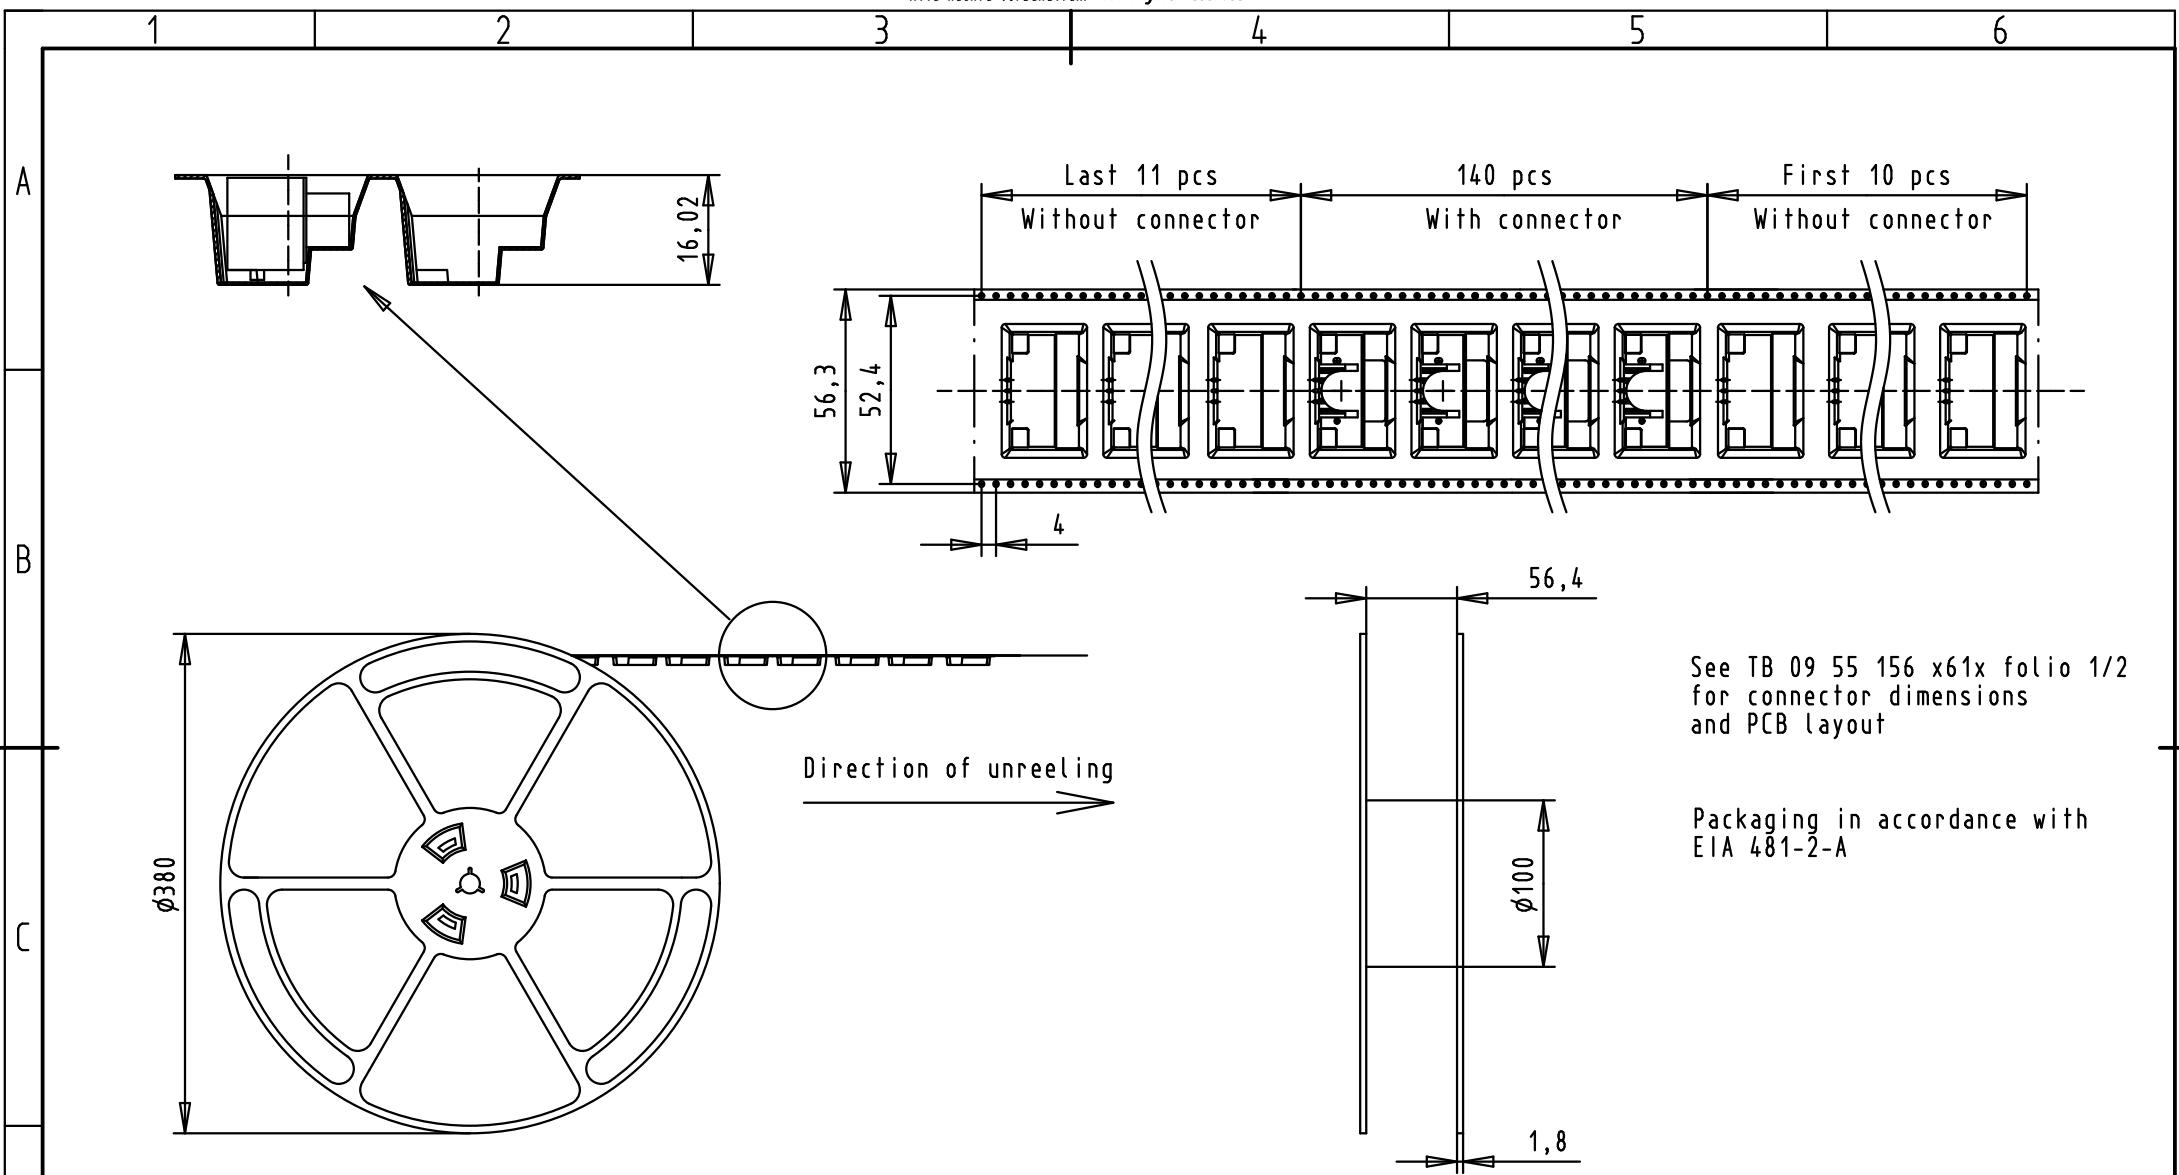

See TB 09 55 156 x61x folio 1/2 for connector dimensions and PCB layout

Packaging in accordance with EIA 481-2-A

D	09551563612.741	1	4-40 UNC	Black Insulator	Reel Packaging (140 connectors)	EC01199	11Jan2010	ED	Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	D-SUB SMT Standard Female 9p with die casted grounds and nuts	Maßstab/ Scale	
	09551566612.741	2				EC01118	26Nov2009	LP	Detail.	17Jul2006				ED
	09551567612.741	3				34398	22Aug2007	ED	Insp.					
	09551563611.741	1	M3			33975	02Apr2007	ED	Stand.				TB 09 55 156 x61x	Blatt/ Page 2 / 2
	09551566611.741	2				33929	25Jan2007	ED	HARTING EURL F-95972 Paris					
	09551567611.741	3				33785	17Jul2006	ED						
	Part number	PL	Thread	Index designation	Mod.	Dot.	Name				Sub.			