

USER MANUAL

Table of Contents

1.0 Introduction.....	2
2.0 Specifications.....	3
3.0 Package Contents.....	3
4.0 Panel Descriptions.....	3
5.0 Connection and Operation.....	4

Mini DisplayPort to VGA Adapter

Dear customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 INTRODUCTION

The Mini DisplayPort to VGA Adapter seamlessly connect next generation DisplayPort based MacBook, MacBook Pro, or MacBook Air with a Mini DisplayPort to conventional VGA displays, such as CRT, LCD monitors and projectors. Mini DisplayPort offers a unified, scalable, and cost effective interface for embedded and external display applications. It not only has an elegant appearance with the white color but also brings much convenience with its small size.

It offers solutions for digital entertainment center, projector factory, noisy space and security concerns, conference room presentation, school and corporate training environments.

1.1 FEATURES

This Mini DisplayPort to VGA adapter has many features that enable it to perform in a superior manner. Among those features you will find:

- Mini DisplayPort 1.1a compliant receiver offering 5.4 Gbps bandwidth over 2 lanes
- Integrated triple 10-bit, 162 MHz video DAC for analog VGA signal output
- Supports up to 1080p, 1920 x 1200 reduced blanking video resolution
- EDID pass-through from PC source to display
- Spread Spectrum (de-spreading) for EMI reduction
- Automatic sink detection
- Low power standby mode operation initiated based on sink detection status
- Powered from Mini DisplayPort source
- 3.3V IO, 1.2V Core
- Low power operation – Active 400mW, standby mode 15mW

Note: For few display cards, the image would not appear until the PC enters into Windows from DOS at the time of restarting.

2.0 SPECIFICATIONS

Signal Inputs/Output	
Maximum Single Link Range	1920X1200, 1080P
Video format supported	
VGA	Max to1920x1200
Operating Frequency	
Vertical Frequency Range	50/60Hz
Video Amplifier Bandwidth	162MHz
Mechanical	
Weight(Net)	28g
Warranty	
Limited Warranty	1 Year Parts and Labor
Environmental	
Operating Temperature	0 °C to +70°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 90 % RH (no condensation)
Power Requirement	No external power needed
Accessories Adapter	
User Manual	English Version

Note: Specifications are subject to change without notice.


3.0 PACKAGE CONTENTS

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- Main unit.
- User's Manual

4.0 PANEL DESCRIPTIONS

Please study the panel drawings below and become familiar with the structure.

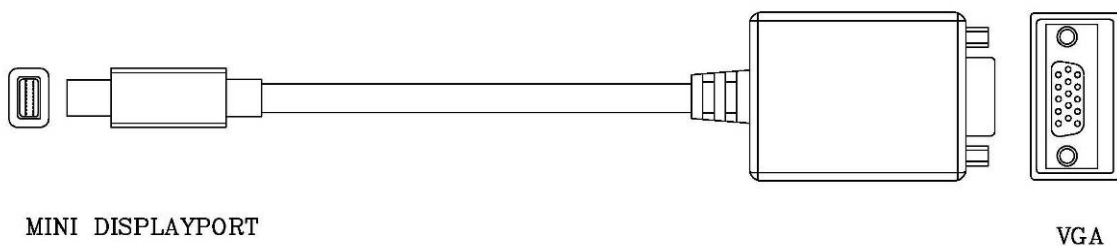

5.0 CONNECTION AND OPERATION

- 1) Connect the Mini DisplayPort male to Mini DisplayPort source device
- 2) Connect the VGA female to display by VGA M/M cable

Attention: Insert / Extract gently.

5.1 CONNECTION DIAGRAM



P/N:C018