

S-TEX 376 Hagane Coil® Technology




S-TEX Liner using HAGANE COIL® Technology (stainless steel and polyester) Nitrile with an additional coating of foam nitrile on the palm

DESCRIPTION

- High cut performance patented yarns reinforced with a dual nitrile coating
- ISO 13997 22.4 Newtons (2.28kg)
- EN388 Cut resistance 4
- Double dipped, ¾ coated, with an extra coating of foam nitrile on the palm
- 13 Gauge Hagane Coil® knitted liner
- Anatomical hand shape design
- Seamless knit

BENEFITS

- Protects the hand from oils, hydrocarbons, grease and abrasion, with long lasting grip performance in wet and oily conditions
- Excellent cut protection performance combined with long lasting grip
- Nitrile coating with a second foamed nitrile coating providing high abrasion resistance EN388: Level 4
- An ergonomically designed hand mould replicates the natural curvature of the human hand and thus reduces hand fatigue, increasing productivity and dexterity
- Seamless for optimum comfort

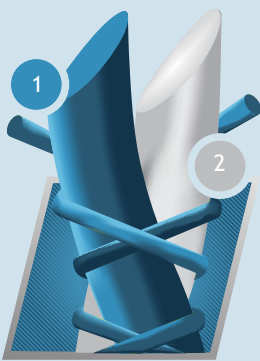

- 1 Polyester
- 2 Stainless Steel

RECOMMENDED FOR THESE RISKS:

Sharp edges
Cut and lacerations
Slip and grip
Mechanical and abrasion

RECOMMENDED FOR THESE LINES OF WORK:

Glass Industry
Stamping
Construction
Automotive
Glazing
Steel Fixing

AVAILABLE SIZES

6/S • 7/M • 8/L • 9/XL • 10/XXL

LENGTH

Dependent on size, in mm (flat)

220-270mm

PACKAGING

Pairs per pack / box

10/120

COLOUR OF SUPPORT/COATING

Blue on black

RECOMMENDATIONS FOR USE

- Do not use in cases of chemical, electrical or thermal risk.
- Store away from light and humidity
- Wash at 40°C max
- Performance level as per EN388 not guaranteed after washing



Globus Building
14 Central Park, Mosley Road
Trafford Park, Manchester
M17 1NY

Tel: 0161 877 4747 Fax: 0161 877 4746
www.globus.co.uk

EC compliance certificate delivered by the notified body 0120
SGS United Kingdom Ltd.
202B Worle Parkway - Weston-super-Mare, BS22 6WA - UK

Descriptions, characteristics, applications and photos are provided purely for information and do not constitute a contractual commitment.
The manufacturer reserves the right to make any modifications it deems necessary.

89/686/CEE
Cat.II



EN 420

EN 388 - 2003



4441

ABRASION 0 1 2 3 4

CUTTING 0 1 2 3 4 5

TEARING 0 1 2 3 4

PUNCTURE 0 1 2 3 4

[Updated 28/11/14]

