

Ultrane 551

DESCRIPTION AND GENERAL PROPERTIES

- **Material** Polyurethane foam
- **Length (inches)** 7.75-10.63 (depending on size)
- **Wrist** Knitted wrist
- **Colour/Color** Grey
- **Interior finish** Seamless textile support
- **Exterior finish** Ventilated back
- **Size / EAN** 6 7 8 9 10 11
- **Packaging** 10 pairs/bag - 100 pairs/carton
- **Complementary information** Contains traces of DMF in compliance with occupational exposure limits



PERFORMANCE RESULTS

Certification category 2




4131X

Legends




MECHANICAL HAZARDS

PERFORMANCE LEVELS

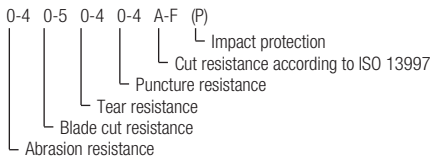

THERMAL RISKS heat and fire

PERFORMANCE LEVELS

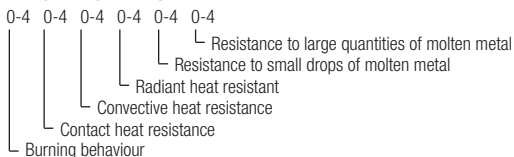

CHEMICAL RISKS

EN ISO 374-1



Type A

U V W X Y Z

- A** Methanol
- B** Acetone
- C** Acetonitrile
- D** Dichloromethane
- E** Carbon Disulfide
- F** Toluene
- G** Diethylamine
- H** Tetrahydrofurane
- I** Ethyl acetate

EN ISO 374-1



Type B

X Y Z

- J** n-Heptane
- K** Sodium hydroxide 40%
- L** Sulphuric acid 96%
- M** Nitric acid 65%
- N** Acetic acid 99%
- O** Ammonia 25%
- P** Hydrogen peroxide 30%
- S** Hydrofluoric acid 40%
- T** Formaldehyde 37%

EN ISO 374-1



Type C

MICRO-ORGANISMS

EN ISO 374-5



Protection against bacteria, fungi

EN ISO 374-5



Protection against bacteria, fungi, virus


VIRUS

EN 511



COLD HAZARDS

PERFORMANCE LEVELS



EN 421



RADIOACTIVE CONTAMINATION



ANSI

A1

CUT

CUT RESISTANCE

- | | | |
|--------------------|--------------------|--------------------|
| A1 ≥ 200 G | A4 ≥ 1500 G | A7 ≥ 4000 G |
| A2 ≥ 500 G | A5 ≥ 2200 G | A8 ≥ 5000 G |
| A3 ≥ 1000 G | A6 ≥ 3000 G | A9 ≥ 6000 G |

For more details: www.mapa-pro.com



DESCRIPTION AND GENERAL PROPERTIES

- Excellent abrasion resistance: longer lasting
- Excellent tactile sensitivity, due to reduced glove thickness
- Absorption of perspiration ensured by the cellular structure of the polyurethane
- Added comfort, due to the seamless knit lining
- OEKO-TEX®

MAIN FIELDS OF USE

Automotive/mechanical industry

- Intricate assembly
- Sorting small parts
- Fitting small screws and fasteners

Electronics

- Electronic component assembly (displays, LEDs, etc.)
- High-frequency antennae riveting
- Microprocessor handling

Food industry

- Packaging

Cosmetics and Pharmaceutical industry

- Cosmetics preparation
- Medicine manufacturing

Construction Industry (Metalworkers/Locksmiths)

- Installing and repairing locks

Construction Industry (Heating engineers/Plumbers)

- Maintaining pipes, heating equipment

Construction Industry (Carpenters/Joiners)

- Laying wood, panelling or moulding

INSTRUCTIONS FOR USE

Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use in the workplace may differ from the tests performed in the laboratory.
- Put the gloves on dry, clean hands.

Storage conditions

Store the gloves in their original packaging protected from heat, light and humidity.

Laundry conditions

Caution : using the gloves or submitting them to a cleaning or laundering process that is not specifically recommended can alter their performance levels.

Drying conditions

- Ensure the inside of the gloves is dry before putting them on again.

LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- CE-Type Examination Certificate

0075/014/162/03/16/0275 ext 01/03/16

- Issued by the notified body nr

0075 - C.T.C - 4 rue Hermann Frenkel - 69367 LYON CEDEX 07 FRANCE