


Specification Control Drawing


Raychem

a) Part as supplied

382W042

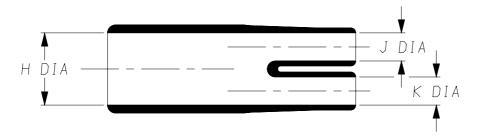

b) Part after unrestricted recovery

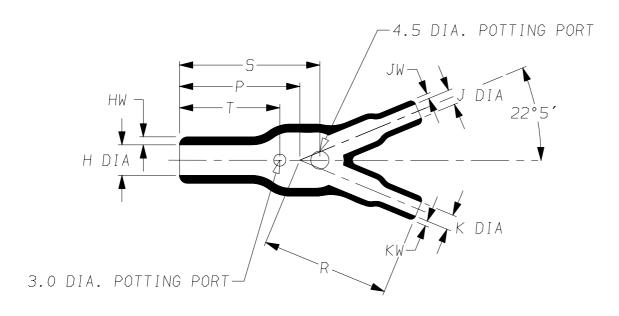

DIMENSIONS in millimetres (in inches, for reference)

	H	+	_	J	k		P	R	S	T	HW	JW	KW
Part No.	Min	Max	Min	Max	Min	Max	±10%	±10%	±10%	±10%	±20%	±20%	±20%
	а	b	а	b	а	b	b	b	b	b	b	b	b
382W042	20 {0.79}	8.0 {0.31}	9.0 (0.35)	4.0 (0.16)	9.0 {0.35}	4.0 {0.16}	30 {1.18}	32 {1.26}	35 (1.38)	25 (0.98)	2.0 {0.08}	1.25 {0.05}	1.25 {0.05}


Copyright(!)

The copyright in this drawing is the property of Tyco Electronics UK Ltd. The drawing is issued on the condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Tyco Electronics UK Ltd.

Page 1 of 2

R	aychem	Specificat Control D		Part Number 382W042 Issue 3				
Iss.	Date	E.C.R. Det		ails of Change				
1 2 3 3	January 1982 August 1987 January 2007 January 2007	**** 5129 CR06-HM-012 CR06-DM-104	-12 Mat	g issued Perial added Old dimensions added Perial description name changed				

(Ordering Information)

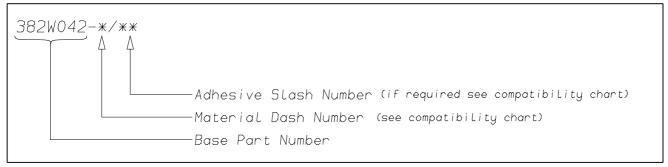

COMPATIBILITY CHART

Material Dash Number	Material Description	SPEC Number	Coating Slash Number	
-3	POLYOLEFIN, SEMI-RIGID	RT-301, RK-6703	/42 ,/86, /180	
-4	POLYOLEFIN, FLEXIBLE	RT-1304 RT-1050	/42 ,/86, /180	
-6	SILICON	RT-602, RK-6706	N/A	
-12	FLUOROELASTOMER, FLEXIBLE	RT-1312, RW-2071	/225	
-25	ELASTOMER, FLUID RESISTANT	RT-1325, RK-6713	/42, /86, /225	
-100	ZERO HALOGEN	RT-1323, RK-6717	/86, /180	
-130	POLYOLEFIN, COMMERCIAL FLEXIBLE	RW-2008	/42	

NOTES

- 1) As supplied dimensions are for uncoated parts, when coating is added entry diameters will reduce by 1.5mm Max.
- 2 Potting Ports are optional, when specified by suffix "-00" they will be located as shown.

England	Tyco Electronics Corporation 300, Constitution Drive, Menlo Park, CA 94025 USA
Telephone: (01793) 528171 Fax: 572516 Cage Code K1010	Telephone (650) 361–3860 Fax: (650) 361–5579 Cage Code 06090

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 382W042-25/225-0