

# Product data sheet

## Subminiature connectors




Product description	<b>M9 IP67 Female cable connector, Contacts: 8, shielded, moulded on the cable, IP67, PUR, black, 8 x 0.14 mm<sup>2</sup>, 2 m</b>
Area	<b>M9 IP67 series 702</b>
Part no.	<b>79 1426 12 08</b>


### Illustration



### Scale drawing

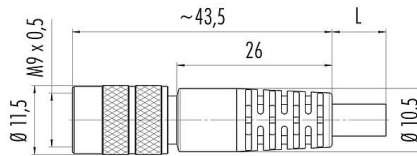

### Contact arrangement (Plug-in side)

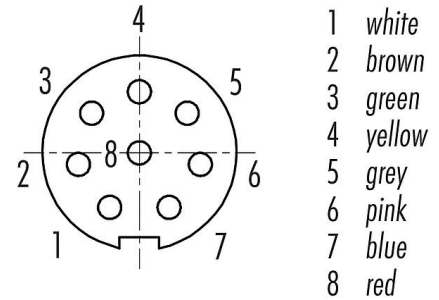

## Technical data

### General features

Part no.	<b>79 1426 12 08</b>
Connector design	Female cable connector
Cable length	2 m
Version	Connector socket straight
Connector locking system	screw
Termination	moulded on the cable
Degree of protection	IP67
Cross-sectional area	0.14 mm <sup>2</sup> / AWG 26
Temperature range from/to	-25 °C / 70 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	94.00
Customs tariff number	85444290

### Electrical parameters

Rated voltage	125 V
Rated impulse voltage	1500 V
Rated current (40 °C)	1.0 A
Insulation resistance	≥ 10 <sup>10</sup> Ω
Pollution degree	1
Overvoltage category	II
Insulating material group	III
EMC compliance	shielded
Shield connection	Shield on the threaded ring

### Material

Housing material	PUR
Contact body material	PBT (UL94 V-0)
Contact material	CuSn (bronze)
Contact plating	Au (gold)
Locking material	CuZn (brass)

# Product data sheet

## Subminiature connectors



Product description	<b>M9 IP67 Female cable connector, Contacts: 8, shielded, moulded on the cable, IP67, PUR, black, 8 x 0.14 mm<sup>2</sup>, 2 m</b>
-	-
Area	<b>M9 IP67 series 702</b>
Part no.	<b>79 1426 12 08</b>

REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	1e4bceb0-bda2-4c61-a0fe-6a4066e2ee73

### Classifications

eCl@ss 11.1	27-06-03-11
ETIM 7.0	EC001855

### Declarations of conformity

Low Voltage Directive	2014/35/EU (EN 60204-1:2018;EN 60529:1991)
RoHS Directive	2011/65/EU (EN 50581:2012)

### Cable data - Structure of the cable

Cable diameter	5.4 mm
Cross section	8 x 0.14 mm <sup>2</sup>
Sheath material	PUR
Single-lead insulation	PVC
Single-lead structure	18 x 0.10 mm
Cable color	black

### Cable data - Electrical properties

Conductor resistance	148 Ω/Km (20°C)
----------------------	-----------------

### Cable data - Mechanical properties

Bending radius, fixed cable	min. 7.5 x Ø
Bending radius, moving cable	min. 15 x Ø
Bending cycles	> 1 million
Permitted acceleration	max. 3 m/s <sup>2</sup>
Travel distance, horizontal	max. 5 m
Travel distance, vertical	max. 2 m

### Cable data - Thermal properties

Temperature range cable in move from/to	-5 °C / 80 °C
Temperature range cable fixed from/to	-25 °C / 80 °C

### Cable data - Other features

Halogen free	no
--------------	----

Product description	<b>M9 IP67 Female cable connector, Contacts: 8, shielded, moulded on the cable, IP67, PUR, black, 8 x 0.14 mm<sup>2</sup>, 2 m</b>
-	-
Area	<b>M9 IP67 series 702</b>
Part no.	<b>79 1426 12 08</b>

### **General Disclaim Notice**

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 50 cNm).