

Elastische Einpresszone / *compliant pressfit zone*

Isolierwerkstoff / *housing material* : PBT GF30

Bauart 7 / *type 7*

Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*

Fehlende Masse und Angaben gemäß IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions according to IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 114124

diameter of drilled hole see drawing 114124

1) $\varnothing 1,0 \pm 0,09$ Durchmesser des metallisierten Loches


$\varnothing 1,0 \pm 0,06$ *Diameter of finished plated-through hole*

$\varnothing 1,15 \pm 0,025$ Bohrungsdurchmesser des Loches


$\varnothing 1,15 \pm 0,025$ *Diameter of drilled hole*

Bestückungsplan / *contact layout*

■ bestückt / *assemble*

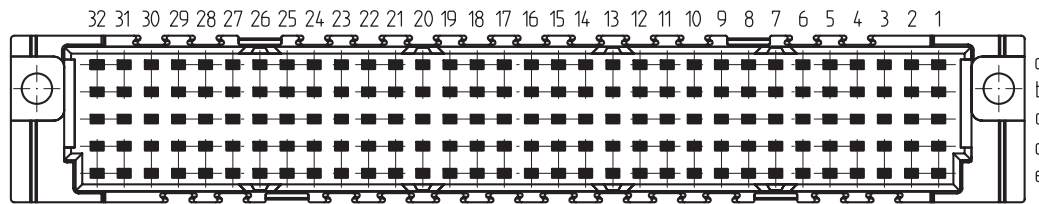

Leiterplatten-Lochbild / *PCB drillhole pattern*

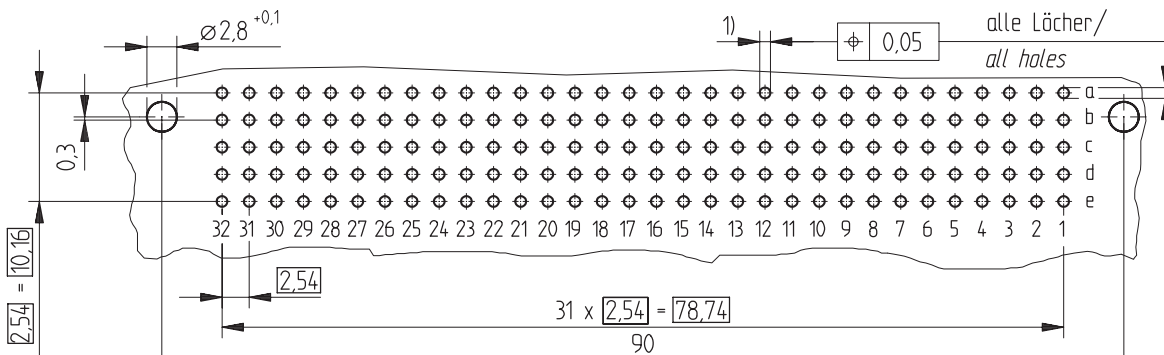

Consider protection memo from DIN 34

Information: All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances All Dimensions in mm	Scale 2:1
	Subject to modification without prior notice. Drawing will not be updated.	Designation Federleiste E 160 EE <i>Fem. Connector E 160 Pressfit</i>
www.ERNI.com	254006	1
a Index	23.02.2007 Date	H:00061003.SZA STVE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[254006](#) [254006-E](#)