Downloaded from Arrow.com.

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER		STUD SIZE	DIMENSIONS in.				
PREFIX	PK		A ±.03 (±.8)	W ±.01 (±.3)	C ±.02 (±.5)	M ±.03 (±.8)	H ±.01 (±.3)
PN18-6FN	-C -M	#6	.78 (19.8)	.24 (6.1)	.20 (5.1)	.64 (16.3)	.15 (3.8)
PN18-6F	-C -M	#6	.78 (19.8)	.30 (7.6)	.20 (5.1)	.64 (16.3)	.15 (3.8)
PN18-8F	-C -M	#8	.85 (21.6)	.32 (8.1)	.23 (5.8)	.68 (17.3)	.17 (4.3)
PN18-10F	-C -M	#10	.86 (21.8)	.35 (8.9)	.25 (6.3)	.70 (17.8)	.20 (5.1)
PN18-10FN	-C -M	#10	.86 (21.8)	.31 (7.9)	.25 (6.3)	.70 (17.8)	.20 (5.1)
PN18-14F	-C -M	1/4"	1.03 (26.2)	.44 (11.2)	.33 (8.4)	.78 (19.8)	.27 (6.9)

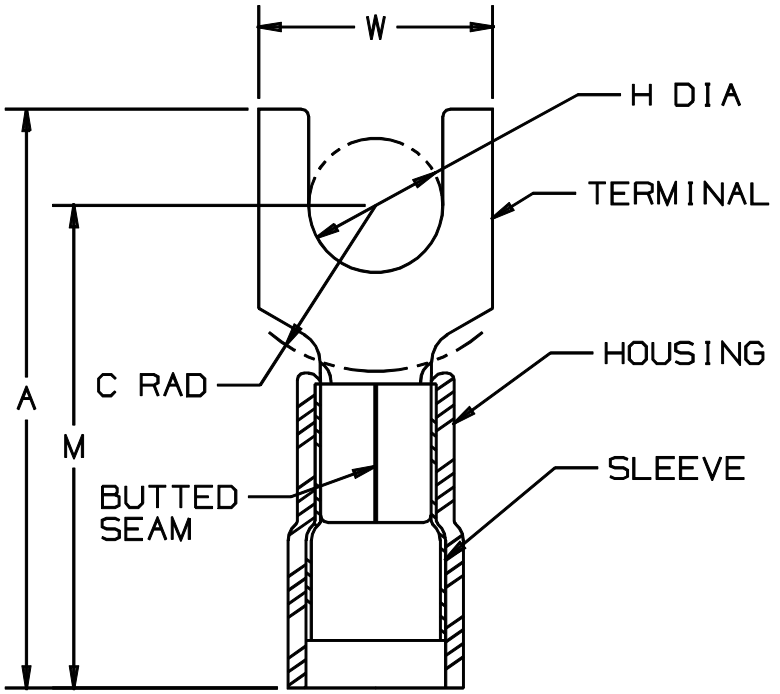

NOTES :

1. UL LISTED AND CSA CERTIFIED FOR :
   A. 600 V MAX. VOLTAGE RATING
   B. 221°F (105°C) MAX. TEMP. RATING
   C. #22-18 AWG SOLID OR STRANDED COPPER WIRE WITH CT-100 INSTALLATION TOOL
   D. #22-16 AWG SOLID OR STRANDED COPPER WIRE WITH CT-500, CT-550 CT-1550, CT-1551, & CT-400 (UL ONLY) INSTALLATION TOOLS
2. PANDUIT APPROVED (#22-18 AWG) WITH CT-160 & CT-260 INSTALLATION TOOLS
3. WIRE STRIP LENGTH: 7/32 $^{+1/32}_{-0}$ (5.6 $^{+.8}_{-0}$)
4. MAX WIRE INSULATION DIA: .145 (3.68)
   MIN WIRE INSULATION DIA: .080 (2.03)
5. MATERIAL :
   A. STAMPING : .03" (.8) THK COPPER, TIN PLATED
   B. HOUSING : RED NYLON
   C. SLEEVE : TIN PLATED BRASS
6. PACKAGING:
   A. STD : -C = 100
   B. BULK : -M = 1000
7. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

LISTED 587H E52164

CERTIFIED LR31212

A41191_04

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM
04	1/01	KMD		CAD FILE SPEC. WAS N41191AA_PCD_03			
03	12/96	JAMB		ADDED NOTE,"MIN WIRE INSUL. DIA."	05371		
02	5/96	TH	RLS	UPDATED NOTES & DIMENSIONS	04464	LA	DRH
01	8/92	BK	RLS	UPDATED DIMENSIONS & FORMAT	01124	LA	JJMO

PANDUIT CORP. TINLEY PARK, ILLINOIS

3PC. NYLON INSULATED, 22-18 BARREL, FORKS

DRAWN BY	CHK'D	SCALE	DRAWING NO.
FES	RLS	NONE	A41191