
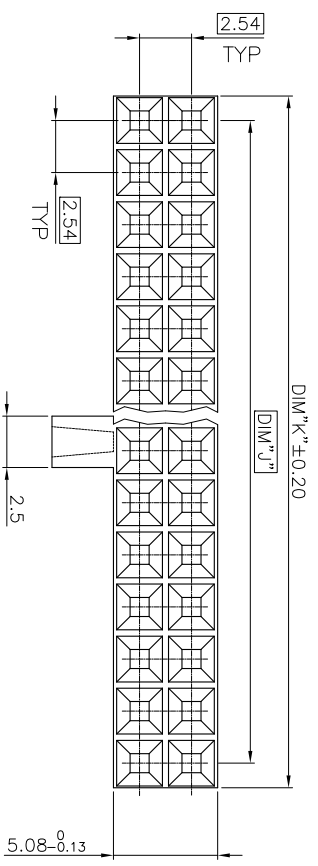


PRODUCT NUMBER
65846-0XX(E)LF

PIN STYLE
SEE SHEET 2

INDICATES THE PRODUCT IS RoHS COMPLIANT, SEE NOTE 6
65846-YYXLF OR 65846-YYXELF ARE EXACTLY THE SAME PRODUCTS. EXTENSION "E" JUST FOR OLD EUROPEAN DESIGN AND MANUFACTURING SITE

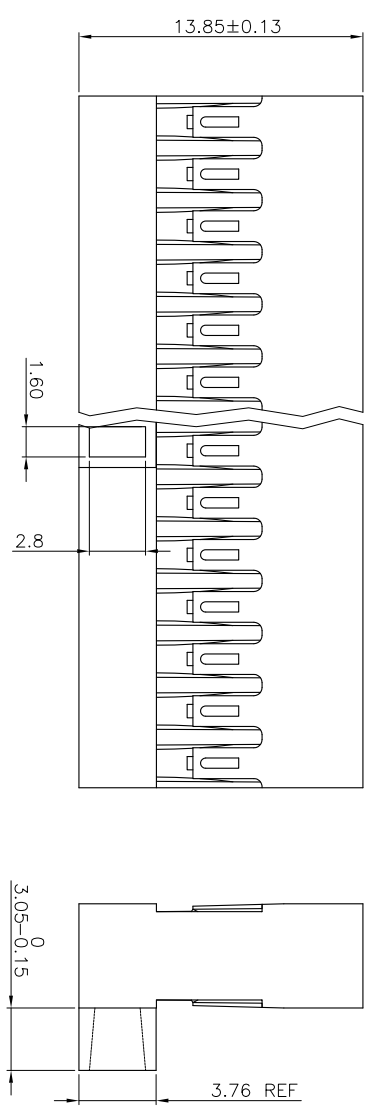

NOTES:

1. MOLDING MATERIAL : MODIFIED POLYPHELYNENE COLOR BLACK, UL 94 V0
2. LATCH MUST WITHSTAND 18N MIN PULL OUT FORCE
3. STANDARD PACKAGING IN POLYBAGS
4. TERMINALS MUST BE CRIMPED PROPERLY FOR SATISFACTORY LATCHING :
 - FOR CRIMPING INSTRUCTIONS, SEE TA-75 AND TA-295
 - FOR TERMINAL APPLICATION SEE TA-531.
5. THIS HOUSING IS INTENDED FOR USE WITH MINI PV TERMINAL WITH 22-36 GAUGE WIRE. PRODUCT SPECIFICATION: BUS-12-067.
6. RoHS COMPLIANT PRODUCT SPECIFICATIONS :
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.



Copyright FCI

mat'l. code		SEE NOTES		surface		tolerance		projection		product family	
lfr	ecp no	dr	date	ISO 902	ISO 406	ISO 1011				BERCONN	
Y	F12-0064	LMU	12.06.08	tolerances unless otherwise specified		X ±0.3					
AA	B-14321	LMU	13.03.21	linear	.xx ±0.13	xxx ±0.05					
				dr	L.MULIN	11.01.10					
				enfr	L.MULIN	11.01.10					
				chr							
				appl	LMU	11.01.10					
sheet index	revision	AA	Y								
1	1	2									



title
MINI LATCH DR
POLARIZED HSG 2.54mm
sheet 1 of 2 size A3

PDS: Ref :AA

STATUS: Released Printed: Nov 15, 2013

1 2 3 4 5 6

PIN STYLE	No. OF POS.	DIM J	DIM K
01	2x12	27.94	30.33
02	2x15	35.56	37.95
03	2x19	45.72	48.11
04	2x22	53.34	55.73
05	2x27	66.04	68.43
06	2x10	22.86	25.25
07	2x07	15.24	17.63
08	2x09	20.32	22.71
09	2x32	78.74	81.13
10	2x05	10.16	12.55
11	2x08	17.78	20.17
12	2x25	60.96	63.35
13	2x30	73.66	76.05
14	2x02	2.54	4.93
15	2x03	5.08	7.47
16	2x04	7.62	10.01
17	2x06	12.70	15.09
18	2x11	25.40	27.79
19	2x13	30.48	32.87
20	2x14	33.02	35.41
21	2x16	38.10	40.49
22	2x17	40.64	43.03
23	2x18	43.18	45.57
24	2x20	48.26	50.65
25	2x21	50.80	53.19
26	2x23	55.88	58.27
27	2x24	58.42	60.81
28	2x26	63.50	65.89
29	2x28	68.58	70.97
30	2x29	71.12	73.51
31	2x31	76.20	78.59
32	2x33	81.28	83.67
33	2x34	83.82	86.21
34	2x35	86.36	88.75
35	2x36	88.90	91.29

0 1 2 3 4 5 6

PDS: Rev: AA

STATUS: Released Printed: Nov 15, 2013

mat'l. code		surface		tolerance		projection		product family	
lfr	ecp no	dr	date	ISO 902	ISO 406	ISO 1011		BERCONN	
Y	F12-0064	LMU	12.06.08	tolerances unless otherwise specified			mm	title	
				linear	X ±0.3		scale 5:1	MINI LATCH DR	
				angles	.xx ±0.13			POLARIZED HSG 2.54mm	
					xxx ±0.05			sheet 2 of	
								size	A3
sheet	revision								
index	sheet								

