THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED. REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS								
REV.	DESCRIPTIONS	DATE	APPROVED					
_	CLASS A RELEASED	9/11/04						

- 1. DO-IT-YOURSELF (DIY) Ø4mm RETRACTABLE SHEATH BANANA PLUG, SCREW ATTACHMENT
- SPECIFICATIONS:

INSULATOR BODY: POLYAMIDE (NYLONE) PLUG BODY: BRASS, NICKEL PLATED

SPRING: SPRING STÉEL

CONTACT SPRING: BECU. NICKEL PLATED

3. RATING:

VOLTAGE: 600V CATIL P2 (per INSTRUCTIONS)

REINFORCED INSULATION, CE MARK

CURRENT: 36A MAX.

INTERNAL RESISTANCE: <10mΩ TEMPERATURE: -20° TO $+80^{\circ}$ C.

4. MAXIMUM WIRE SIZES:

CONDUCTOR: Ø.090 (12AWG) INSULATION: Ø.16 (Ø4.0) STRIP LENGTH: .25 (6.4)

PART NUMBER CT3201-#

COLOR: 0 - BLACK


2 - RED

4 - YELLOW

5 - GREEN

6 - BLUE

9 - WHITE

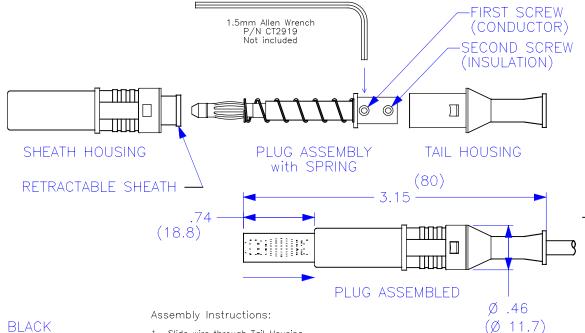

Slide wire through Tail Housing.

Strip wire (1) (2) (6.4mm).
Strip wire 25' (6.4mm).
Insert stripped wire into Plug Assembly and tighten First Set—Screw (conductor).
Set—Screws use 1.5mm Allen Wrench (Cal Test P/N CT2919).
Snug Second Set—Screw on wire insulation.

Push Plug Assembly with Spring into Tail Housing.
 Slip Retractable Sheath onto end of Plug Assembly
 Snap Tail Housing assembly into Sheath Housing.

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	CONTRACT NO.		C	al Test	t Flec	ctronics	3	22820 Savi Ranch Parkway	
		FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ±.005	APPROVALS DRAWN WDH	DATE 9/10/04	TITLE					Yorba Linda, CA 92887-461	
		MATERIAL	CHECKED	, ,	SCREW ATTACHMENT						
		FINISH	ENGR.		SIZE	CAGE CODE		DWG. NO.	DZ	20100	REV.
NEXT ASSY	USED ON		DESIGN ACTIVITY		Α				1 0	20100	_
APPLICATION					SCALE	1:1				SHEET 1 OF	1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cal Test Electronics:

<u>CT3201-9</u> <u>CT3201-6</u> <u>CT3201-2</u> <u>CT3201-4</u> <u>CT3201-5</u> <u>CT3201-5</u> <u>CT3201-S-2</u> <u>CT3201-S-0</u> <u>CT3201-S-4</u> <u>CT3201-S-4</u> <u>CT3201-S-6</u> <u>CT3201-S-5</u>