

## Cable connector - SF-5ES1N8A8LDL - 1605549

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable connector, straight long, Screw locking, M23, Number of positions: 5+PE, Type of contact: Socket, Crimp connection, shielded: yes, Cable diameter: 7.5 mm...18 mm

The figure shows the 8-pos. (4+3+PE) product version



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 253567
Weight per Piece (excluding packing)	123.47 g
Custom tariff number	85366990
Country of origin	Germany
Note	Made to Order (non-returnable)

### Technical data

#### General

Note	Order information Order crimp contacts 6 x Ø 2 mm separately
Type of locking	Screw locking
Coding	N
Contact connection method	Crimp connection
Type of contacts	Socket
Number of positions	6
Contact diameter of power contacts	2 mm
Nominal current per power contact at 25°C	30 A
Contact diameter of signal contacts	2 mm
Nominal current per signal contact at 25°C	30 A
Conductor entry	7.5 mm ... 18 mm
Pg housing screw connection	none

#### Ambient conditions

Ambient temperature	-40 °C ... 125 °C
---------------------	-------------------

# Cable connector - SF-5ES1N8A8LDL - 1605549

## Technical data

### Ambient conditions

Degree of protection	IP67
----------------------	------

### Material

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Insulator material	PA 66
Gasket and O-ring material	FPM

### Specifications according to DIN EN 61984:2001

Installation height max.	3000 m
Nominal / operating voltage of power contacts	630 V
Rated surge voltage of power contacts	6 kV
Overvoltage category of power contacts	III
Degree of pollution of power contacts	3
Nominal / operating voltage of signal contacts	630 V
Rated surge voltage of signal contacts	6 kV
Overvoltage category of signal contacts	III
Degree of pollution of signal contacts	3

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27242290
eCl@ss 5.1	27260701
eCl@ss 6.0	27260702
eCl@ss 7.0	27440102
eCl@ss 8.0	27440102

### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 5.0	EC002641

### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

# Cable connector - SF-5ES1N8A8LDL - 1605549

## Approvals

Approvals

Approvals

UL Recognized / EAC / cUL Recognized

Ex Approvals

Approvals submitted

## Approval details


UL Recognized	
mm <sup>2</sup> /AWG/kcmil	4.0
Nominal current I <sub>N</sub>	27 A
Nominal voltage U <sub>N</sub>	600 V

EAC
-----

cUL Recognized	
mm <sup>2</sup> /AWG/kcmil	4.0
Nominal current I <sub>N</sub>	18 A
Nominal voltage U <sub>N</sub>	600 V


## Drawings

Schematic diagram



Connector pin assignment

Dimensional drawing

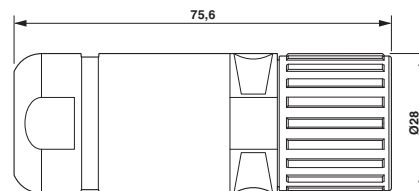

Dimensional drawing

## Cable connector - SF-5ES1N8A8LDL - 1605549

Diagram

