

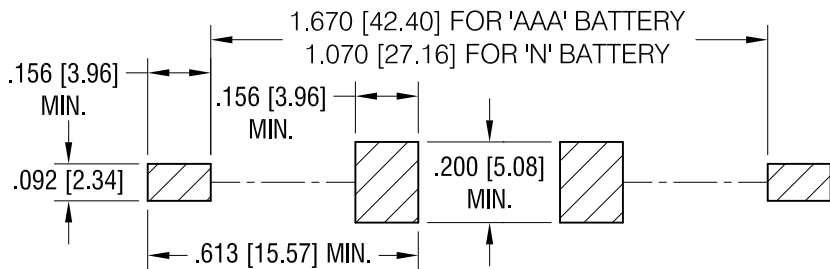


MOUNTING PAD LAYOUT. REQUIRED SPACING FOR 'AAA' OR 'N' BATTERIES

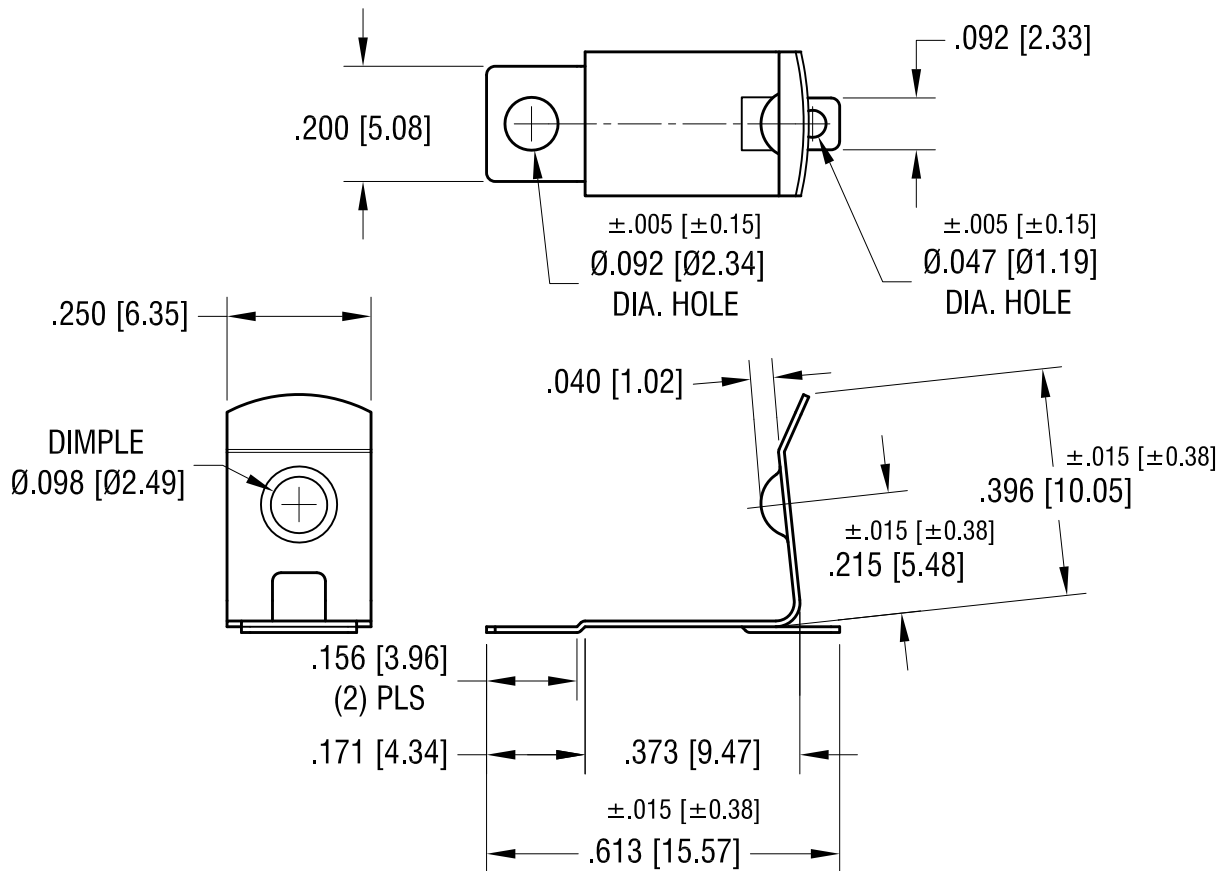

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE



NOTE:

1. HEAT TREAT TO SPRING TEMPER.

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK NY 11040 • Tel (516)328-7500

11.01.21	CHANGE AS PER ECR 21-125	C	PART NAME 'AAA' SMT BATTERY CLIP		
5.31.17	CHANGE AS PER ECR 17-030	B	MATERIAL .010 [0.25] TH'K ANNEALED SPRING STEEL		
3.13.14	1.67 WAS 1.700 LAYOUT FOR AAA 1.070 WAS 1.100 LAYOUT FOR N CHANGE ASPER ECN 14-028	A	FINISH TIN NICKEL PLATE		DRN BY NT DATE 3.30.10
			TOLERANCES INCH [MM] DECIMAL ±.010 [±0.25] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED		APP'D LN SCALE 3X
DATE	DESCRIPTION	REV.	C	DWG NO. 56	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keystone Electronics:](#)

[56](#)