


AMPMODU | AMPMODU 2 mm

TE Internal #: 2355045-6 PCB Mount Header, Vertical, Board-to-Board, 6 Position, 2 mm [. 079 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, Black, AMPMODU 2 mm

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

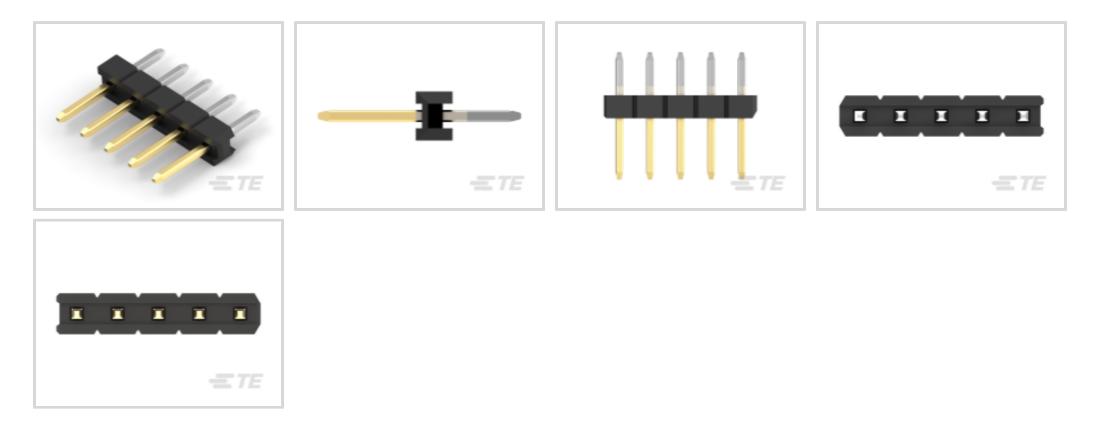

PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: 6

Number of Rows: 1

Features

connectivity

Product Type Features

PCB Connector Assembly Type	PCB Mount Header	
Connector System	Board-to-Board	
Header Type	Breakaway	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Stackable	No	
PCB Mount Orientation	Vertical	
Number of Positions	6	
Number of Rows	1	
Electrical Characteristics		
Dielectric Withstanding Voltage (Max)	500 VAC	
Operating Voltage	125 VAC	
Body Features		
Connector Profile	Standard	

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 6 Position, 2 mm [.079 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, Black, AMPMODU 2 mm



Primary Product Color	Black
Contact Features	
Contact Mating Area Length	4 mm[.157 in]
Mating Square Post Dimension	.5 mm[.02 in]
PCB Contact Termination Area Plating Material Thickness	2 µm[78.74 µin]
Contact Layout	Inline
Contact Underplating Material Thickness	.5 μm[19.69 μin]
PCB Contact Termination Area Plating Material Finish	Bright
Contact Shape & Form	Square
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.1 μm[3.94 μin]
Contact Type	Pin
Contact Current Rating (Max)	2 A

Termination Features

Square Termination Post & Tail Dimension	.5 mm[.02 in]
Termination Post & Tail Length	2.8 mm[.11 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Housing Features	
Centerline (Pitch)	2 mm[.079 in]
Housing Material	PA9T GF
Dimensions	
Connector Length	12 mm[.472 in]
Connector Width	2 mm[.079 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Usage Conditions	
Housing Temperature Rating	High
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operation/Application	
Assembly Process Feature	Without Pick and Place Cover

PCB Mount Header, Vertical, Board-to-Board, 6 Position, 2 mm [.079 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, Black, AMPMODU 2 mm



Circuit Application	Signal
Industry Standards	
UL Rating	Recognized
Agency/Standard	UL
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Type	Tube
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant
	·
EU ELV Directive 2000/53/EC	Compliant
EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant No Restricted Materials Above Threshold

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

PCB Mount Header, Vertical, Board-to-Board, 6 Position, 2 mm [.079 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, Black, AMPMODU 2 mm








Also in the Series AMPMODU 2 mm

PCB Mount Header, Vertical, Board-to-Board, 6 Position, 2 mm [.079 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, Black, AMPMODU 2 mm



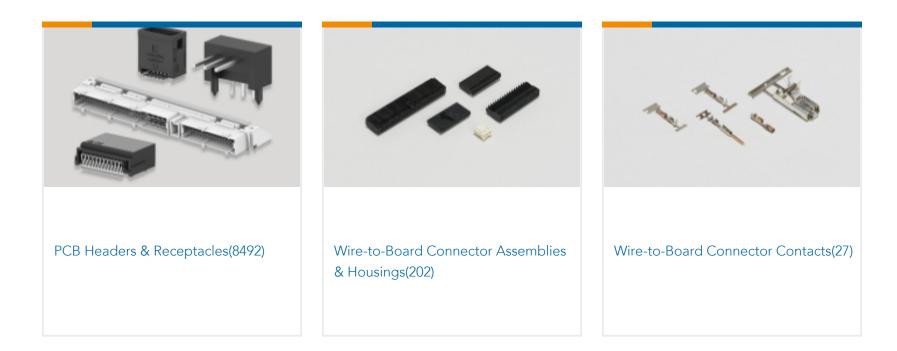

Customers Also Bought



4P R/A HDR VAL-U-LOK V2 W/P	5P,2MM,BRK HDR,SRVT,2.8,0.1AU,TB	TERMINAL, SOLIS R 8 10	CMC 64PIN HEADER CONNECTOR ASSEMBLY
TE Part #5-1768034-4			
LEB-A4P-8A			
Documents			
P <mark>roduct Drawings</mark> 6P,2MM,BRK HDR,SRVT,2.8,0			

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2355045-6_A.2d_dxf.zip

PCB Mount Header, Vertical, Board-to-Board, 6 Position, 2 mm [.079 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, Black, AMPMODU 2 mm



English Customer View Model ENG_CVM_CVM_2355045-6_A.3d_igs.zip English Customer View Model ENG_CVM_CVM_2355045-6_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English