
# OJ-SS-112LMH,000 <

### OEG | OEG Miniature PCB Relay OJ/OJE

TE Internal #: 2-1419129-5 OEG Miniature PCB Relay OJ/OJE, Power Relays, Standard, Monostable, DC, 150 – 200mW Coil Power Rating Class, 200mW Coil Power Rating DC

#### View on TE.com >



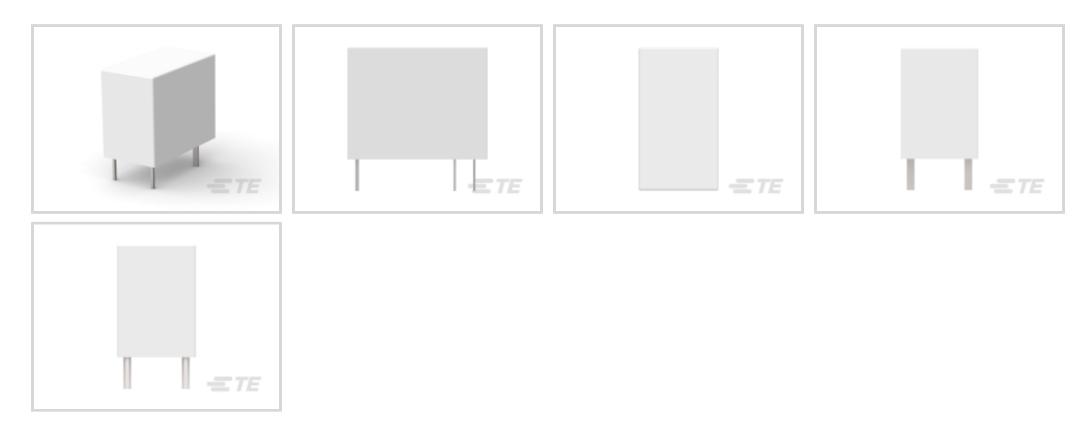

Power Relay Type: Standard

Coil Magnetic System: Monostable, DC

Coil Power Rating Class: 150 – 200 mW

Coil Power Rating DC: 200 mW

Coil Resistance: 720  $\Omega$ 

### All STD OEG Miniature PCB OJ/OJE Pow Relays (91)



## Features

## Product Type Features

Power Relay Type	Standard					
Electrical Characteristics						
Insulation Initial Dielectric Between Coil & Contact Class	3500 – 4000 V					
Insulation Initial Dielectric Between Open Contacts	750 Vrms					
Contact Limiting Making Current	8 A					
Contact Limiting Short-Time Current	8 A					
Contact Limiting Continuous Current	8 A					
Insulation Creepage Class	5.5 – 8 mm					
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms					
Insulation Creepage Between Contact & Coil	9.4 mm[.37 in]					
Contact Limiting Breaking Current	8 A					
Coil Magnetic System	Monostable, DC					
Coil Power Rating Class	150 – 200 mW					

**C** For support call+1 800 522 6752

OEG Miniature PCB Relay OJ/OJE, Power Relays, Standard, Monostable, DC, 150 – 200mW Coil Power Rating Class, 200mW Coil Power Rating DC



Coil Power Rating DC	200 mW			
Coil Resistance	720 Ω			
Coil Special Features	Sensitive Version, UL Coil Insulation Class E			
Coil Voltage Rating	12 VDC			
Contact Switching Load (Min)	100mA @ 5V			
Contact Switching Voltage (Max)	30 VDC			
Contact Voltage Rating	30 VDC			
Body Features				
Insulation Special Features	Tracking Index of Relay Base PTI250			
Product Weight	9 g[.318 oz]			
Contact Features				
Contact Arrangement	1 Form A (NO)			
Contact Current Class	5 – 10 A, 16 A			
Contact Current Rating (Max)	8 A			
Contact Material	AgCdO			
Contact Number of Poles	1			
Terminal Type	PCB-THT			

## **Termination Features**

Relay Termination Type	Through Hole					
Mechanical Attachment						
Relay Mounting Type	Printed Circuit Board					
Dimensions						
Length Class (Mechanical)	16 – 20 mm					
Insulation Clearance Class	2.5 – 4 mm					
Height Class (Mechanical)	14 – 15 mm					
Insulation Clearance Between Contact & Coil	7.7 mm[.303 in]					
Width Class (Mechanical)	10 – 12 mm					
Product Width	10.2 mm[.4 in]					
Product Length	18.2 mm[.717 in]					
Product Height	14.7 mm[.579 in]					
Usage Conditions						
Environmental Ambient Temperature Class	50 – 70 °C					

OEG Miniature PCB Relay OJ/OJE, Power Relays, Standard, Monostable, DC, 150 – 200mW Coil Power Rating Class, 200mW Coil Power Rating DC



Environmental Ambient Temperature (Max)	70 °C[158 °F]				
Packaging Features					
Packaging Method	Box & Tray, Tray				
Product Compliance For compliance documentation, visit the product page on TE.com>					
EU RoHS Directive 2011/65/EU	Not Compliant				
EU ELV Directive 2000/53/EC	Not Compliant				
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold				
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Cadmium oxide (4.75% in Component Part) Aticle Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.				
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.				
Solder Process Capability	Wave solder capable to 265°C				

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**


OEG Miniature PCB Relay OJ/OJE, Power Relays, Standard, Monostable, DC, 150 – 200mW Coil Power Rating Class, 200mW Coil Power Rating DC






TE Part # CAT-OE4-OJ1 STD OEG Miniature PCB OJ/OJE Pow Relays

## Also in the Series | OEG Miniature PCB Relay OJ/OJE

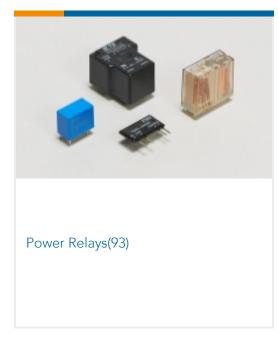

## Customers Also Bought

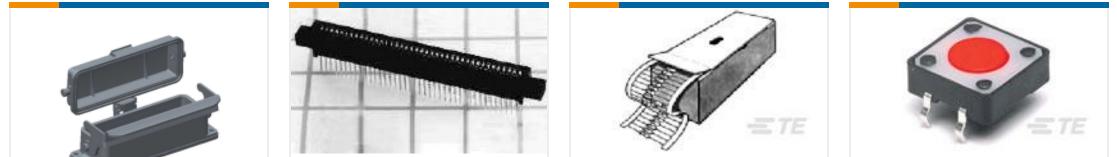

TE Part #T1510243000-000 H24B-AD-LB	TE Part #1-5530841-1 CONN SEC II 50 POS 100C/L	TE Part #1-2176045-8 EP 5W 4K7 5%	TE Part #1437565-4 FSM102=NEW P/N
TE Part #1440002-8 STD SCHRACK RZF Power Relays	TE Part #1419135-3 STD OEG Miniature PCB OJ/OJE Pow Relays	TE Part #1461056-3 SDT-S-105DMR,601	TE Part #1461056-6 SDT-S-112DMR,601

TE Part #1461056-7 SDT-S-124DMR,601

OEG Miniature PCB Relay OJ/OJE, Power Relays, Standard, Monostable, DC, 150 -200mW Coil Power Rating Class, 200mW Coil Power Rating DC



## Documents

**Product Drawings** OJ-SS-112LMH,000

English

## **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2-1419129-5\_G.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-1419129-5\_G.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-1419129-5\_G.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

## **Datasheets & Catalog Pages**

OJ\_OJE Series Relay Data Sheet English

English

**Product Specifications** 

Definitions, Handling, Processing, Testing and Use of Relays

English

OJ-SS-112LMH,000 Spec Sheet

Japanese

Product Environmental Compliance

Product Compliance

English

**Product Compliance** 

English