

TITLE: CONTACT, PIN, SOLID, SIZE 20, 20 - 22 AWG, ATM SERIES REV: A5 SH: 1 OF: 1 AT60-202-20XXX

REVISIONS								
REV	ECO		DESCRIPTION		DATE		BY	APPR
А3	-	RELEAS	E NEW	DWG FORMAT	16/JUI	_/13	DRP	-
A4	-	ADDE	D BARF	REL DIA. 1.27	04/DE	C/14	JAH	-
A5	-	REVISED C	VERAL	L LENGTH LIMITS	19/API	R/16	JAH	-

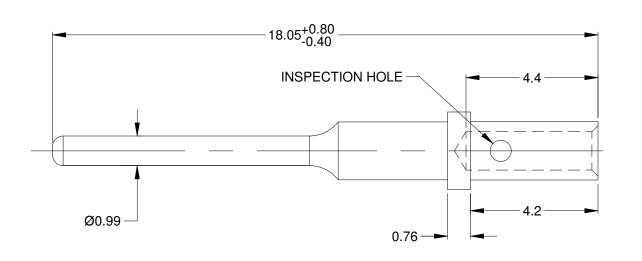



ITEM

**A5** 

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: COPPER ALLOY

2. PLATING: SEE PART NUMBER CHART

3. CONTACT SIZE: 20

4. SPECIFICATIONS:

4.1 CURRENT RATING: 7.5 AMPS

4.2 CONTACT MILLIVOLT DROP: 60 MILLIVOLT DROP @ 7.5 AMP TEST CURRENT.

4.3 RoHS COMPLIANT

5. RECOMMENDED WIRE RANGE: 20 - 22 AWG

6. AVAILABLE HAND CRIMPER: CA-5D12

7. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY

PART NUMBER CHART						
PLATING	PART NUMBER					
GOLD	AT60-202-2031					
NICKEL	AT60-202-20141					

SEE PART NUMBER CHART

	OLL 174 (11 (ONBLITO)						
	PART N	DESCRIPTION					
QUANTITY		TERIALS LIST					
UNLESS OTHERWISE SPECIFIED  1) All dimensions are in metric(mm).		SIGNATURE	S DATE	Amphono			
Tolerances are a     PL DEC ±0.30		D.PARKS	16/JUL/13			mphenol	
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:			Sin	e Systems - www.amphenol-sine.com	
3) Note reference = X  MATERIAL SPECIFICATIONS:		ENGINEER:		44724 Morley Drive Clinton Township, MI 48036			
		APPROVAL:		Gilliton Township, MI 46036			
		CUSTOMER:	CONTACT, PIN, SOLID, SIZE 20,				
		THIS DRAWING IS SUPPLIE	20 - 22 AWG, ATM SERIES				
PROCESS SPECIFICA	TIONS:	INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.		SIZE	C-	AT60-202-20XXX	
NEXT ASS'Y:				SCALE: N	IONE	SHEET <b>1</b> OF	

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

AT60-202-20141