

The ECS-.327-12.5-8X-C tuning fork type crystal is used as a clock source in communication equipment, measuring instruments, microprocessors and other time management applications. Their low power consumption makes these crystals ideal for portable equipment.

[Request a Sample](#)



- Cost Effective
- Tight Tolerance
- Long Term Stability
- Excellent Resistance and Environmental Characteristics
- Pb Free/RoHS Compliant

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS		ECS-.327-12.5-8X-C	UNITS
Frequency	F_0	32.768	KHz
Frequency Tolerance	$\Delta f/f_0$	± 10	ppm
Load Capacitance	C_L	12.5	pF
Drive Level (max)	D_L	1	μW
Resistance At Series Resonance	R_1	35(max)	K Ω
Q-Factor	Q	90,000(typ.)	
Turnover Temperature	T_M	+25 ± 5	$^{\circ}C$
Temperature Coefficient	β	-0.040ppm/ $^{\circ}C^2$ max.	PPM/ ΔC°
Shunt Capacitance	C_0	1.60 (typ.)	pF
Capacitance Ratio		460 (typ.)	
Operating Temp	T_{opr}	-10 ~ +60	$^{\circ}C$
Storage Temperature	T_{stg}	-40 ~ +85	$^{\circ}C$
Shock Resistance		Drop 3 times on hard wooden board from height of 75cm / ± 5 ppm max.	PPM
Insulation Resistance	IR	500 M Ω min./DC100V	M Ω
Aging (First Year)	$\Delta f/f_0$	± 3 ppm max. @ +25 $^{\circ}C \pm 3^{\circ}C$	ppm
Motional Capacitance	C_1	0.0035(typ.)	pF

DIMENSIONS (mm)


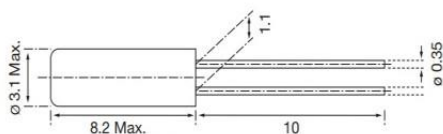


Figure 1) ECS-3X8X

RECOMMENDED OSCILLATION CIRCUIT




ELECTRICAL CHARACTERISTICS

IC: TC 4069P
 Rf: 10M Ω
 Rd: 330K Ω (As required)
 C₁ = 22pF, C₂ = 22pF
 V_{DD} = 3.0V

In this circuit, low drive level with a maximum of 1 μW is recommended. If excessive drive is applied, irregular oscillation or quartz element fractures may occur.

PARABOLIC TEMPERATURE CURVE

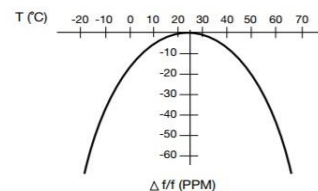

To determine frequency stability, use parabolic curvature. For example: What is the stability at 45 $^{\circ}C$?

- 1) Change in T ($^{\circ}C$) = 45 - 25 = 20 $^{\circ}C$
- 2) Change in frequency = -0.04 PPM x $(\Delta T)^2$
 = -0.04 PPM x (20) 2
 = -16.0 PPM

PART NUMBERING GUIDE:

Manufacturer	Frequency	Load Capacitance	Package Type*	**Tolerance Spec.
ECS	.327	12.5	8X	C

* Package type example (8X = 3x8X)

** C = ± 10 ppm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ECS:](#)

[ECS-.327-12.5-8X-C](#)