

# Surface Mount Bandpass Filter

## CBP-2400A+

50Ω      2200 to 2600 MHz

### The Big Deal

- Excellent Rejection
- Low passband Insertion Loss
- Miniature shielded package



Generic photo used for illustration purposes only  
CASE STYLE: KU1513

### Product Overview

CBP-2400A+ is a ceramic-coaxial-resonator based bandpass filter in a shielded package fabricated using SMT technology. This filter offers outstanding close-in rejection, low insertion loss and high power handling for use in mobile satellite, ISM and amateur radio

### Key Features

Feature	Advantages
High Selectivity	The CBP-2400A+ filter incorporates High-Q ceramic resonators that enables sharp rejection near passband.
Low Passband VSWR	This filter maintains typical VSWR over a wide passband frequency range making this filter easier to integrate into receiver and transmitter RF chains with less concerns for in band frequency ripple.
Small size, 0.550" x 1.040" x 0.185"	The small surface mount package enables the CBP-2400A+ to be used in compact designs.
Rugged construction	The CBP-2400A+ has been qualified over wide range of thermal, mechanical and environmental conditions including withstanding the stress of extensive solder reflow cycles.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount Bandpass Filter

## CBP-2400A+

50Ω 2200 to 2600 MHz



Generic photo used for illustration purposes only  
CASE STYLE: KU1513

### Features

- Low Insertion loss
- High selectivity
- Miniature shielded package

### Applications

- Defense systems
- ISM
- Mobile satellite
- Amateur radio

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	2400	—	MHz	
	Insertion Loss	F1-F2	2200-2600	—	1.1	2	dB
	VSWR	F1-F2	2200-2600	—	1.6	2.32	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-1780	20	31	—	dB
	VSWR	DC-F3	DC-1780	—	20	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	3480-4200	20	31	—	dB
	VSWR	F4-F5	3480-4200	—	20	—	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	5W Max.

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

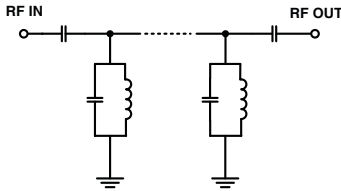





### Typical Frequency Response

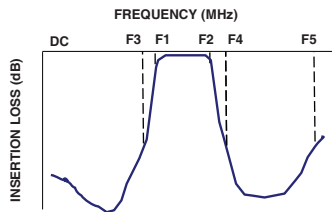

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	100.12	1737.18	2200	2.02
750	78.92	115.81	2220	1.95
1500	60.32	59.91	2250	1.86
1780	32.95	38.61	2300	1.73
1800	30.59	36.20	2350	1.63
1880	20.80	25.94	2400	1.55
1915	16.25	19.98	2420	1.52
1990	6.52	6.39	2440	1.51
2020	3.59	3.33	2450	1.50
2060	1.63	1.60	2460	1.49
2200	0.92	1.03	2480	1.49
2400	1.01	1.47	2500	1.48
2600	0.88	1.04	2510	1.48
2800	3.22	3.67	2520	1.48
2900	6.37	7.76	2530	1.49
3100	13.87	21.73	2540	1.49
3280	20.46	32.79	2550	1.49
3480	28.90	41.37	2560	1.50
3510	30.15	43.44	2580	1.51
4200	58.74	40.41	2600	1.53

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

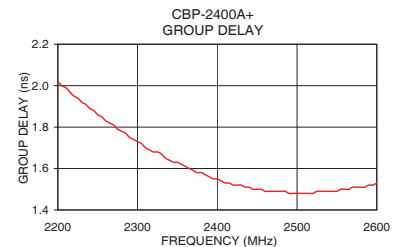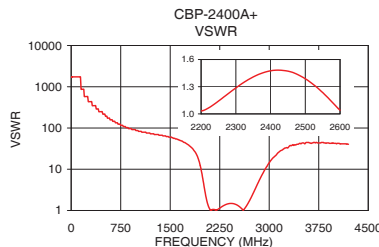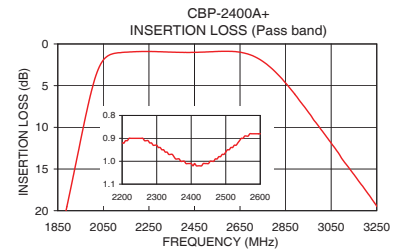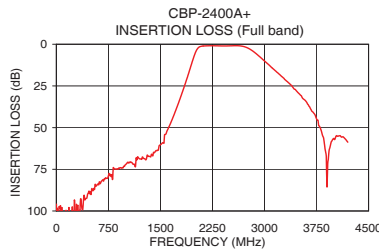

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV.B  
M174392  
CBP-2400A+  
EDU1474  
URJ  
200813  
Page 2 of 3

## Pad Connections

INPUT	1
OUTPUT	10
GROUND	2 to 9, 11 to 16


**Demo Board MCL P/N: TB-578+**  
**Suggested PCB Layout (PL-331)**

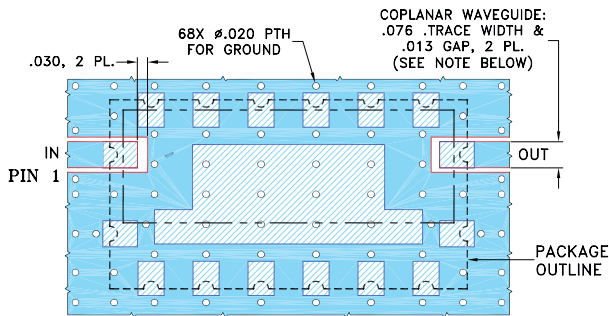

- NOTE: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS  $.060" \pm .004"$ ; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Outline Drawing

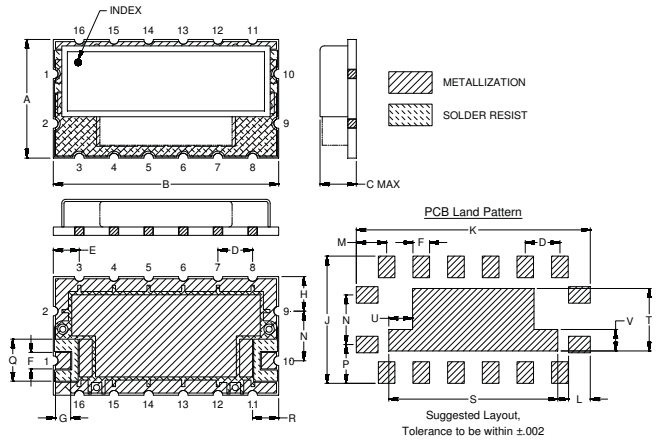

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L
.550	1.040	.185	.160	.120	.077	.070	.160	.590	1.080	.100
13.97	26.24	4.70	4.06	3.05	1.96	1.78	4.06	14.99	27.43	2.54
M	N	P	Q	R	S	T	U	V	Wt.	
.140	.230	.180	.195	.115	.780	.290	.110	.100	grams	
3.56	5.84	4.57	4.95	2.92	19.81	7.36	2.79	2.54	2.6	

Note: Please refer to case style drawing for details.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[CBP-2400A+](#)